

# Positive Emitter Coupled Logic(PECL) Chip Terminators



Suitable for output applications in emitter coupled logic for high-speed signal transmission.  
Minimized reflection permits high-speed data processing.


RoHS compliant

Completely lead free




## SPECIFICATIONS

### Mechanical

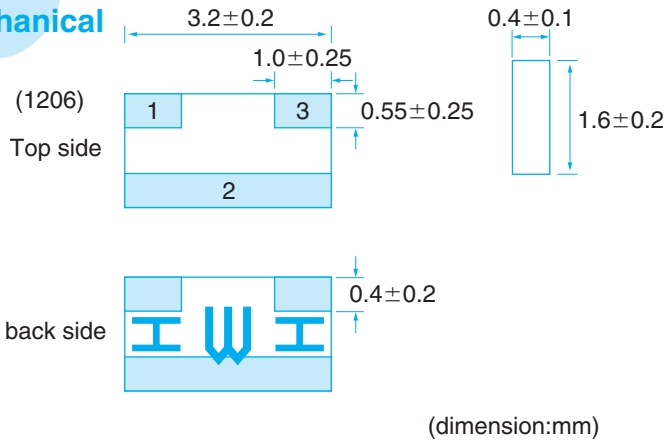

### Equivalent circuit



### Electrical

Type	RN1632F
Resistance (Ω)	R1=50, R2=46.4, R3=50 ; typical
Tolerance %(code)	±1.0%(F)
TCR ppm /°C(code)	±50ppm/°C
Power Rating	42mW/element ; 125mW/package
Rated Operating Temperature	-55°C~+125°C
Package	5,000pcs/reel



## PART NUMBER

**RN 1632 F - N23 - F - C**

