



FEATURES

- Cutoff or center frequency is set by only four resistors
- High-reliability (QL) versions
- Wide operating temperature ranges
- Small, 24-pin ceramic DDIP package
- A variety of functions and families



GENERAL DESCRIPTION

DATEL's FLJ-HR Series are a new type of resistor-tunable active filters designed to have long life and high-reliability features. The FLJ-HR Series are packaged in 24-pin ceramic DDIP's and operate over the -40 to +85°C (MC version) temperature range. Units that operate over the -55 to +125°C military temperature range (MM versions) and devices with high-reliability screening (-QL versions) are also available. All versions have passed very severe qualification tests to prove their high reliability and longevity. The FLJ-HR Series employ state-variable methods, as does DATEL's FLJ-UR Series, to allow system designers to expand their functions. The cutoff or center frequency can easily be set by only four external resistors.




MECHANICAL DIMENSIONS

Inches (mm)

Dimension Tolerances (unless otherwise indicated):
2 place decimal (XX) ±0.010 (±0.254)
3 place decimal (XXX) ±0.005 (±0.127)


Lead Material: Kovar alloy

Lead Finish: 50 micronsches (minimum) gold plating over 100 micronsches (nominal) nickel plating

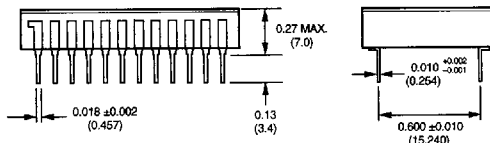


BLOCK DIAGRAMS


FLJ-HR4LA1/2
4-POLE LOWPASS BUTTERWORTH (Fig.1-1)

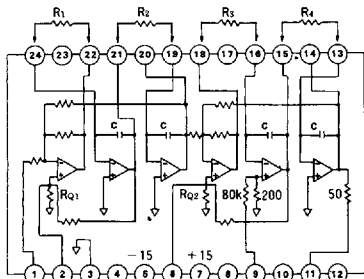


FLJ-HR4LB1/2
4-POLE LOWPASS CAUER (Fig.1-2)

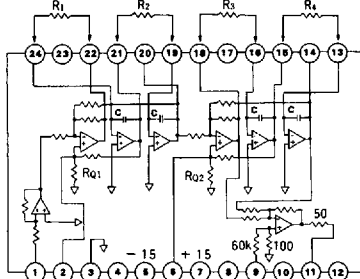

FLJ-HR4HA1/2
4-POLE HIGHPASS BUTTERWORTH (Fig.1-3)

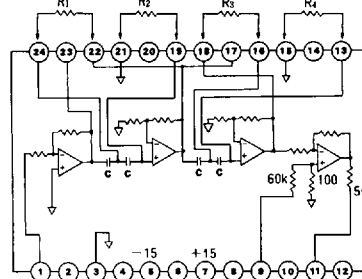

FLJ-HR4HB1/2
4-POLE HIGHPASS CAUER (Fig.1-4)

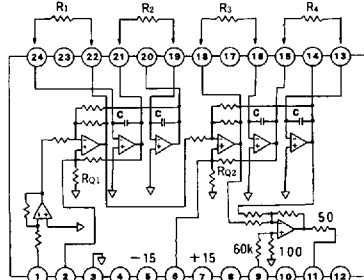

FLJ-HR2BA1/2
2-POLE PAIR BANDPASS BUTTERWORTH (Fig.1-5)

