

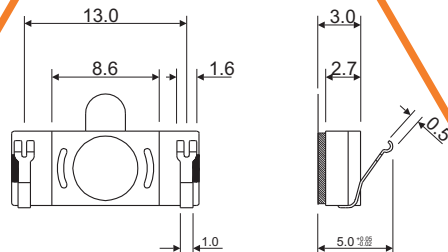



SoniCrest SPEAKER SOUND GENERATORS

HSR0615C-32



Dimension

Unit : mm
Tolerance : ±0.3mm

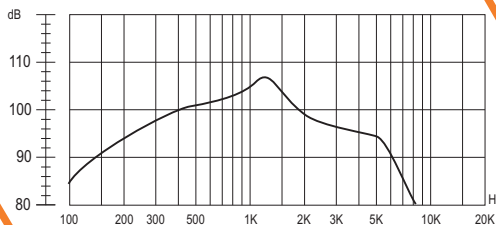

Frequency Response

Applied Voltage : 100mV, Sine Wave
Based on IEC-R318 Standard

- **Specification** (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (mW)	Maximum Input Power (mW)	★Sensitivity at 1kHz (dB)	★Frequency Range (Hz)	Total Harmonic Distortion (THD)	Operating Temperature (°C)	Storage Temperature (°C)
32 ±20%	10	30	105 ± 3	300 ~ 4000	< 5%	-40 ~ +70	-40 ~ +70

HSR0615C-32

The specification are only for 32Ω version. Specification for other impedance is available upon request.
★value Applied 100mV Input Power and Based on IEC-R318 Standard.