

E-Series Plug-In Mixer

0.025 - 200 MHz

EMA-3MH

V3.00

Features

- LO Power: +13 dBm
- Up to +9 dBm RF

Specifications @ 25°C

Frequency Range		
RF		0.025 - 200 MHz
LO		0.025 - 200 MHz
IF		DC - 200 MHz
Conversion Loss (dB)		Maximum
0.05 - 100 MHz	Typical 4.8	7.0
0.025 - 200 MHz	Typical 5.5	8.5
Isolation (dB)		Minimum
LO to RF		
0.025 - 0.25 MHz	Typical 74	50
0.25 - 100 MHz	Typical 45	35
100 - 200 MHz	Typical 38	25
LO to IF		
0.025 - 0.25 MHz	Typical 67	35
0.25 - 100 MHz	Typical 45	30
100 - 200 MHz	Typical 36	20

Operating Characteristics

Impedance	50 Ohms Nominal
RF input for 1dB Compression	+ 9 dBm
DC Polarity	Negative


Ordering Information

Part No.	Packaging
EMA-3MH	Tube
EMA-3MHTR	Forward Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	200 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C
Pin Temperature (10 Seconds)	260°C

R-1

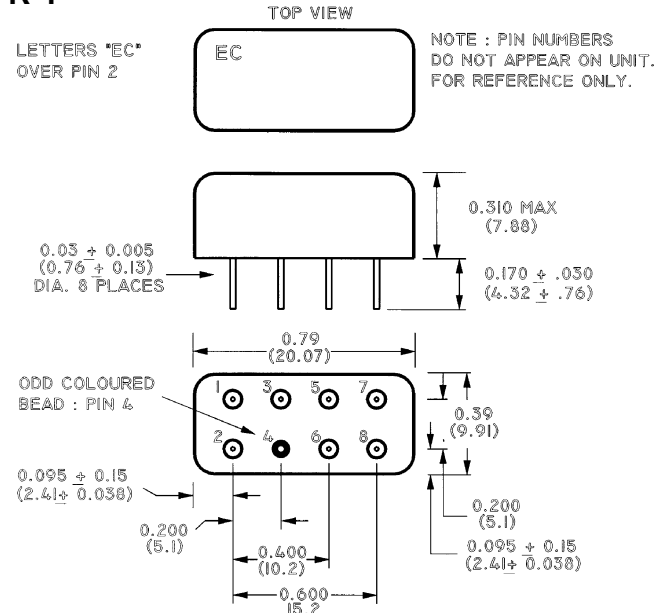

Pin Configuration

Function	Pin No.
LO	8
RF	1
IF*	3,4
Ground	2,5,6,7
Case Ground	2

*IF pins must be connected together externally.

Specifications Subject to Change Without Notice.

S 0773 B

M/A-COM, Inc.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595
 Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020