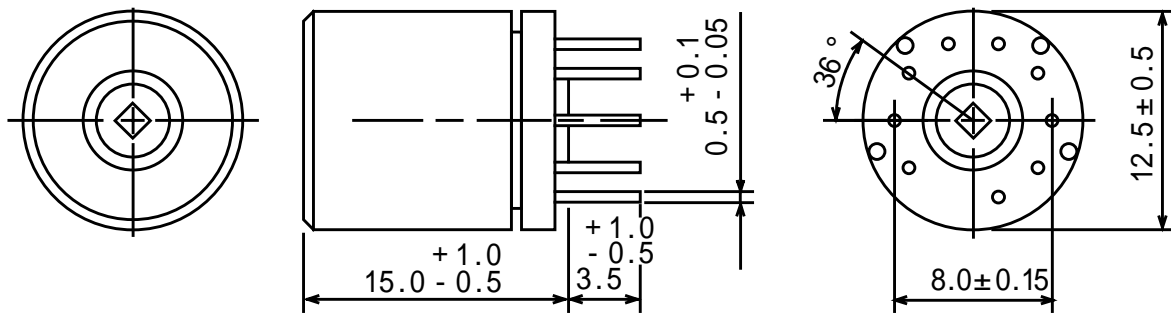


**Type: MC-122K**
**Product Description**


- 13.0mm Max. 16.0mm Max. Height.
- Operating frequency: 400kHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

**Feature**

- High inductance fixed shielded type.
- Can be used as DC-DC converter transformer.
- RoHS Compliance.

**Dimensions (mm)**


- \* Dimension does not include solder used on coil.
- \* Pin pitch shall be measured at the root of terminal.

**Connection (Bottom View)**


"S" is winding start

**Specification (Part No.: VLT0146)**

Item	(7-9)	Measuring Condition
Inductance	3.25mH±8% Within	1kHz
Unloaded Q	35 Min.	70kHz
Using Frequency: 70kHz		