

Product Specifications



F2A-PDFPMDR-4F5

FSJ2-50 SureFlex™ Jumper with interface types 7-16 DIN Female Panel Mount and 7-16 DIN Male Right Angle, 4.5 ft



CHARACTERISTICS


General Specifications

| | |
|-------------------------|--------------------|
| Body Style, Connector A | Panel mount |
| Body Style, Connector B | Right angle |
| Cable Family | FSJ2-50 |
| Interface, Connector A | 7-16 DIN Female |
| Interface, Connector B | 7-16 DIN Male |
| Length | 1.372 m 4.500 ft |
| Orientation | 0° |

Electrical Specifications

| | |
|------------------|-----------|
| DTF, Connector A | -32.00 dB |
| DTF, Connector B | -32.00 dB |

Jumper Assembly Sample Label

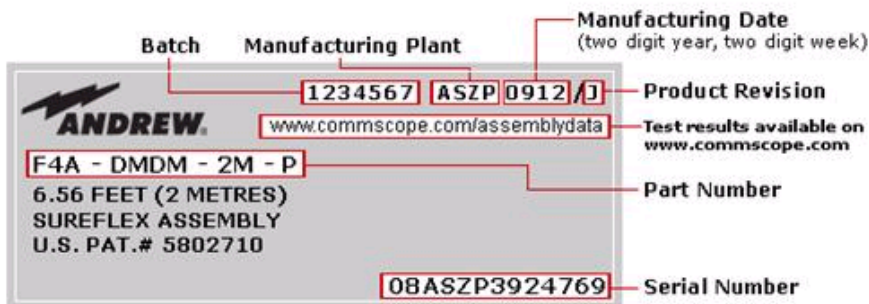

Regulatory Compliance/Certifications

| Agency | Classification |
|----------------------------|---|
| RoHS 2002/95/EC | Compliant by Exemption |
| China RoHS SJ/T 11364-2006 | Above Maximum Concentration Value (MCV) |

www.commscope.com/andrew

©2011 CommScope, Inc. All rights reserved.
All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change.
See www.commscope.com/andrew for the most current information.

Product Specifications

F2A-PDFPMDR-4F5



ISO 9001:2008

Designed, manufactured and/or distributed under this quality management system



INCLUDED PRODUCTS



FSJ2-50

FSJ2-50, HELIAX® Superflexible Foam Coaxial Cable, corrugated copper, 3/8 in, black PE jacket
