
Stewart Connector		Stewart Connects	or Contamo Inc	REV.		REVISION CHANGES		
		Stewart Connecto Insilco Technolog		XO	AS DRAWN			
		11118 Susquehan	na Trail South					
		Glen Rock, PA (717) 235-7512	1/32/-9199 Fax: (717) 235-7954					
		PART NO. SS	5-668808S-A-PG1-BC	II .				
		EMI-RFI_ONE_PIEC)				
			HARMONICĂ JACK PAC					
		*4.554 [115.67]	MAX —					
				ا ا ہے ا	⊕ 	** .148 [3.75] (16)		
		<u> </u>	<u># \ # \ # # \ # </u>	i <i>I</i> [N]	**599 [15.21] TPP.	545 [13.84] MAX		
→	.455 [11.56]	- 	550 [13.97] REF TYP		* **	545]±.01(
	Laundanna b Laundanna b Laundan	┲ ┦ ┎┸╫┉┰╏┎┉┉	▗▄ ▗▄ ╵ ▄╵ ╈╵╇					
a						12;		
		n Annunghin	աւ հատու հատու	JIIII				
	 -	*4.300 [109.2	2] ————		<u>→</u> (9. [9.]			
.865 [21.97] MAX ¬	-	7 EQ. SPACES @ .5 3.850 TOL. NON-	550 EA	-	014 [0.36] (9)	**.083 [2.12](9)		
<u> </u>					ᠵ᠁ ᠆┸╶≝` \	OTTOM SURFACE OF JACK— (PCB SURFACE)		
		i 🌢 i	i i	İ	₩	(PGB SURFACE)		
					425 [10.79]-			
4					425 [1			
<u>+</u>				Щ	шф			
[2.46] 🗕		;		₩ ; <u>.</u> 				
.097			300 [20	-	550 [13.97] TOL NON-AC] TYP		
FOR R	EFERENCE	10.54] 10.16]	.300 [7.6 13.97]	2]] TYP		
	ONLY		Ø.066 [1.68] (7) —					
		1.5 vm	5 [0.89] (64)025	[0.64]	TOL NON	-ACCNM 65. -ACCNM 67. [5] TAB 7.		
NOTES: - "BC" DESIGNATES IN	ICLUSION OF ALL TOP AND	T+++	∓▀▗▗▎▖▗▀▘ ▸─ ▗▘	- + + +	▗▀▘ ╸╣╸╵╸ [▀] ╸╡╺ ┕╶╎╸╸┡╶╸	*********		
BOTTOM PANEL GROU SIDE SOLDER TAILS F	INDS, WITH ALL REAR AND PRESENT.	+ +	- 100 [7.05]	•	\(\) ' '	' \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \		
- "PG4" DESIGNATES PANEL GROUNDS.	INCLUSION OF ALL SIDE	 	ø <u>.128 [3.25]</u> (3) 2.150 [54.61]			.145 [3.68]		
	WITH F.C.C. DIMENSION REQUIRE	MENTS.	2.130 [34.01]	 *4.30	 00 [109.22] ————	ø.085 [2.16] (2) —/		
ABOUT CENTER LINE.		-		*4.5 <u>:</u>	20 [114.81] ———			
	NDICATES HIGHEST POINT OF BEA ARE SUBJECT TO CHANGE WITHOU		TOLERANCE ±.003	i From	IENDED HOLE LAYOUT COMPONENT SIDE] UNLESS OTHERWISE SP			
AVAILABLE WITH:			THIRD ANGLE PROJECTION	\dashv		BJECT MATTER SHOWN THEREON HE PROPRIETARY PROPERTY OF		
- 30 & 50 MICRO-I - LOADED 1 - 8 C	NCH SELECTIVE GOLD PLATING CONTACTS			<u> </u>	STEWART CONNECTOR SYSTE REPRODUCED,COPIED OR U	EMS ("SCS") AND SHALL NOT BE USED IN ANY MANNER WITHOUT F "SCS". THE SUBJECT MATTER		
CT660162		SHT. 1 OF 2	$ \Psi $ $\overline{}$			ATENT MAY BE PENDING. © SCS		

Stewart	0	(O)	ות	1@	f	or
	77		7//	///		


Stewart Connector Systems, Inc. Insilco Technologies Group 11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 Fax: (717) 235-7954

REV.	REVISION CHANGES
XQ	AS DRAWN

PART NO. SS-668808S-A-PG1-BC

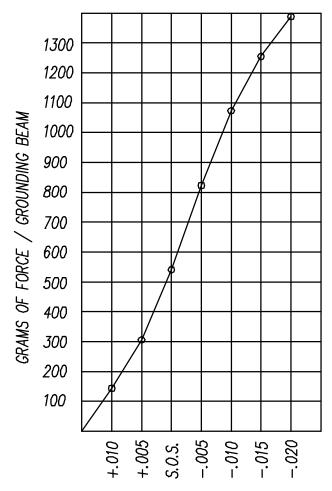

PANEL GROUNDING BEAM DEFLECTION S.O.S. = SUGGESTED OPENING SIZE




THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY. THESE VARIABLES CAN BE ADJUSTED IN EITHER DIRECTION BUT MAY CARRY SOME CONSEQUENCES IN THE FORM OF LOWER MATING FORCES OR TIGHTER ASSEMBLY TOLERANCES. FORCE VALUES ON THE GRAPH ARE GENERAL AVERAGES TAKEN AT THE POINT OF CONTACT SHOWN ABOVE. THE SUGGESTED PANEL OPENING INCLUDES APPROXIMATELY .020 CLEARANCE ON THE SIDES AND TOP AND .005 ON THE ВОТТОМ.

4.562 -.010 MAX. RADIUS(4) .000 (TOP OF PCB TO BOTTOM OF OPENING) SUGGESTED PANEL OPENING

CT660162

THIRD ANGLE PROJECTION

SHT. 2 OF 2



THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR SYSTEMS ("SCS") AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF "SCS". THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING. @ SCS

FOR REFERENCE

ONLY