

IWS SERIES - 10 WATT

DESCRIPTION

IWS DC/DC converters offer excellent regulation and isolation in an industry-standard package. Available in several input versions, the IWS is perfect for industrial, datacom, or telecom applications. The IWS features short circuit protection and 500 VDC isolation. Please see the IWD series for dual-output applications.



TECHNICAL SPECIFICATIONS



| Input | |
|-----------------------|--------------------|
| Voltage Range | |
| 5 VDC Nominal | 4.5 - 9 VDC |
| 12 VDC Nominal | 9 - 18 VDC |
| 24 VDC Nominal | 18 - 36 VDC |
| 48 VDC Nominal | 36 - 72 VDC |
| Reflected Ripple | 20% I_{in} Max. |
| Reverse Input Current | 100% I_{in} Max. |

| Output | |
|---|----------------------|
| Setpoint accuracy | ±1% |
| Line regulation Vin Min. - Vin Max., I_{out} Rated | ±0.5% V_{out} |
| Load regulation I_{out} Min. - I_{out} Max., Vin Nom. | ±1.0% V_{out} |
| Minimum output current | 10 % I_{out} Rated |
| Dynamic regulation, loadstep | 25% I_{out} |
| Pk deviation | 1% V_{out} |
| Settling time | 500 ms |
| Temperature coefficient | 0.02%/°C |
| Ripple and noise, 20 MHz BW | 1% V_{out} Nom. |
| Short-circuit protection 1 | Continuous |
| Current Limit | 130% |

| Notes | |
|--|---|
| 1 | Continuous short-circuit protection is provided. Long-term continuous operation in this mode is not recommended. Converter will auto-restart once fault has been removed. |
| Specifications typically at 25°C, normal line, and full load, unless otherwise stated. | |
| Soldering Conditions: I/O pins, 260°C, ten seconds; fully compatible with commercial wave-soldering equipment. | |
| Safety: | Agency approvals may vary from model to model. Please consult factory for specific model information. |

FEATURES

- Industry-Standard Package
- Industry-Standard Pinout
- 85°C Case Operation
- Short-Circuit Protection
- 5, 12, 24, and 48V Input Versions
- Input Pi Filter and 6-Sided Shielding
- Regulated Outputs
- 500V Isolation

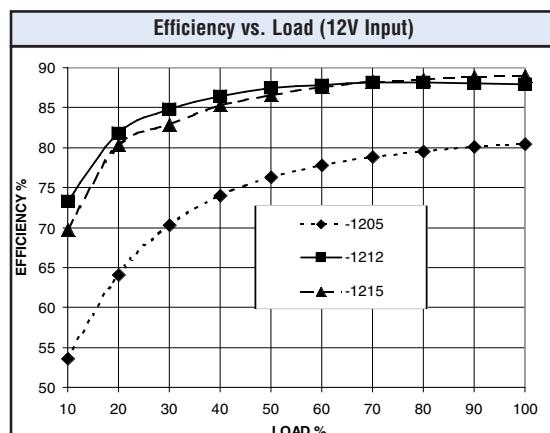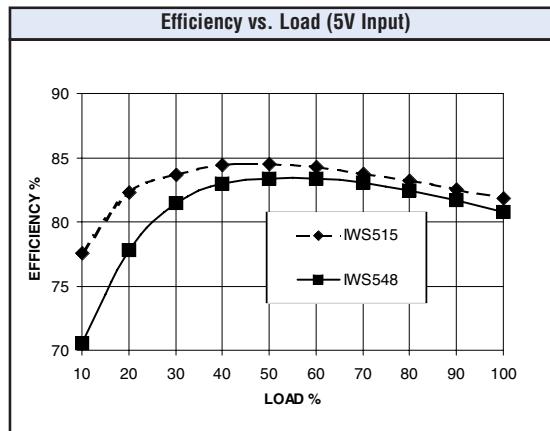

| General | |
|--|-----------------|
| Switching Frequency | 300 kHz |
| Isolation | |
| Input - Output | 500 VDC |
| Input - Case | 500 VDC |
| Output - Case | 500 VDC |
| Isolation Resistance - Input to Output | 10^9 Ohms |
| Standard Case Operating Range | -25 to +85°C |
| Industrial Range (add -I to p/n) | -40 to +85°C |
| Storage Range | -40 to +125°C |
| Humidity Max., Non-Condensing | 95% |
| Vibration, 3 Axes, 5 Min Each | 5 g, 10 - 55 Hz |
| Safety | UL, cUL, TUV |
| Weight (approx.) | 1.4 oz |

IWS SERIES - 10 WATT


MODELS - (See the last page of Section for options.)

| MODEL | INPUT VOLTAGE (VOLTS) | INPUT VOLTAGE RANGE (VOLTS) | MAXIMUM INPUT CURRENT (AMPS)* | OUTPUT VOLTAGE (VOLTS) | RATED OUTPUT CURRENT (AMPS) | RIPPLE & NOISE pk-pk (mV) | TYPICAL EFFICIENCY** |
|----------------|-----------------------|-----------------------------|-------------------------------|------------------------|-----------------------------|---------------------------|----------------------|
| IWS505 | 5 | 4.5 - 9 | 3.20 | 5 | 2.00 | 100 | 78% |
| IWS512 | 5 | 4.5 - 9 | 3.70 | 12 | 1.00 | 120 | 80% |
| IWS515 | 5 | 4.5 - 9 | 3.45 | 15 | 0.75 | 150 | 82% |
| IWS524 | 5 | 4.5 - 9 | 3.60 | 24 | 0.50 | 240 | 83% |
| IWS548 | 5 | 4.5 - 9 | 3.55 | 48 | 0.25 | 480 | 84% |
| IWS1212 | 12 | 9 - 18 | 1.80 | 12 | 1.00 | 120 | 82% |
| IWS1215 | 12 | 9 - 18 | 1.65 | 15 | 0.75 | 150 | 84% |
| IWS1224 | 12 | 9 - 18 | 1.75 | 24 | 0.50 | 240 | 85% |
| IWS1248 | 12 | 9 - 18 | 1.75 | 48 | 0.25 | 480 | 86% |
| IWS2424 | 24 | 18 - 36 | 0.95 | 24 | 0.50 | 240 | 85% |
| IWS2448 | 24 | 18 - 36 | 0.90 | 48 | 0.25 | 480 | 86% |
| IWS4824 | 48 | 36 - 72 | 0.45 | 24 | 0.50 | 240 | 85% |
| IWS4848 | 48 | 36 - 72 | 0.45 | 48 | 0.25 | 480 | 89% |

NOTES: * Maximum input current at minimum input voltage, maximum rated output power.

** At nominal V_{in} , rated output.

MECHANICAL DRAWING

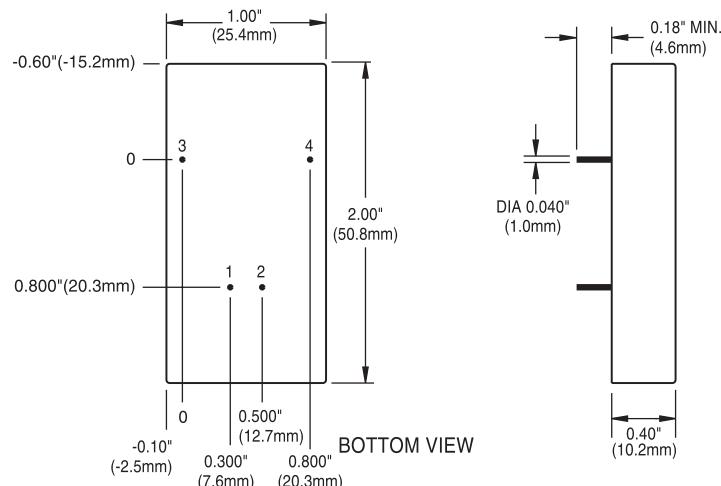

| Thermal Impedance | |
|--------------------|-----------|
| Natural Convection | 15.4 °C/W |
| 100 LFM | 12.2 °C/W |
| 200 LFM | 9.3 °C/W |
| 300 LFM | 7.4 °C/W |
| 400 LFM | 6.4 °C/W |

Note:
Thermal impedance data is dependent on many environmental factors. The exact thermal performance should be validated for specific application.

| Pin | Function |
|-----|-------------------|
| 1 | +V _{in} |
| 2 | -V _{in} |
| 3 | +V _{out} |
| 4 | -V _{out} |

| Tolerances | |
|--|---------------|
| Inches: | (Millimeters) |
| .XX ± 0.040 | .X ± 1.0 |
| .XXX ± 0.010 | .XX ± 0.25 |
| Pin: | |
| ± 0.002 | ± 0.05 |
| Case: | |
| +0.04, -0.00 | +1.0, -0.0 |
| (Dimensions as listed unless otherwise specified.) | |

OPTIONS

When ordering equipment options, use the following suffix information. Select the option(s) that you prefer and add them to the model number. Example ordering options are located below the options table.

| OPTION | SUFFIX | APPLICABLE SERIES | REMARKS |
|--|--------|---|--|
| Negative Logic | N | HAS, HBD, HBS, HES, HLS, HLD, LES, QBS, QES, QLS, TES, TQD | TTL "Low" Turns Module ON TTL "High" Turns Module OFF |
| Lucent-Compatible Trim | T | HAS, HBD, HBS, HES, HLS, QBS, QES, QLS | |
| Terminal Strip | TS | XWS, XWD, XWT | |
| Trim | 1 | IAS, LES | |
| Enable | 2 | IAD, IAS, LES, SMS | |
| Trim and Enable | 3 | IAS, LES | |
| Pin Length and Heatsink Options | | | Standard Pin Length is 0.180" (4.6mm) |
| 0.110" (2.8mm) Pin Length | 8 | All Leaded Models | |
| 0.150" (3.8mm) Pin Length | 9 | All Leaded Models | |
| 0.24" (6.1mm) Horizontal Heatsink | 1H | All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages) | Includes Thermal Pad |
| 0.24" (6.1mm) Vertical Heatsink | 1V | All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages) | Includes Thermal Pad |
| 0.45" (11.4mm) Horizontal Heatsink | 2H | All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages) | Includes Thermal Pad |
| 0.45" (11.4mm) Vertical Heatsink | 2V | All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages) | Includes Thermal Pad |
| 0.95" (24.1mm) Horizontal Heatsink | 3H | All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages) | Includes Thermal Pad |
| 0.95" (24.1mm) Vertical Heatsink | 3V | All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages) | Includes Thermal Pad |

Example Options:

HBS050ZG-ANT3V = HBS050ZG-A with negative logic, Lucent-compatible trim, and 0.95" vertical heatsink.

LES015YJ-3N = LES015YJ with optional trim and enable, negative logic.

QBS066ZG-AT8 = QBS066ZG-A with Lucent-compatible trim and 0.110" pin length.

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional President of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

For the Most Up-To-Date Information

www.power-one.com

24 Hours/Day—7 Days/Week