

GENERAL DESCRIPTION (continued)


input pins. Subsequent burst addresses can be internally generated as controlled by the burst advance pin (ADV#).

Address and write control are registered on-chip to simplify WRITE cycles. This allows self-timed WRITE cycles. Individual byte enables allow individual bytes to be written. WEL# controls DQ1-DQ8 and DQP1. WEH# controls DQ9-DQ16 and DQP2, conditioned by BWE# being LOW. GW# LOW causes all bytes to be written. Parity pins are only available on the x18 version. WRITE pass-through

makes written data immediately available at the output register during the READ cycle following a WRITE as controlled solely by OE# to improve cache system response.


The MT58LC128K16/18D8 operates from a +3.3V power supply and all inputs and outputs are TTL-compatible. The device is ideally suited for Pentium™ and PowerPC™ pipelined systems and systems that benefit from a very wide high-speed data bus. The device is also ideal in generic 16-, 18-, 32-, 36-, 64- and 72-bit-wide applications.

**FUNCTIONAL BLOCK DIAGRAM
128K x 16**

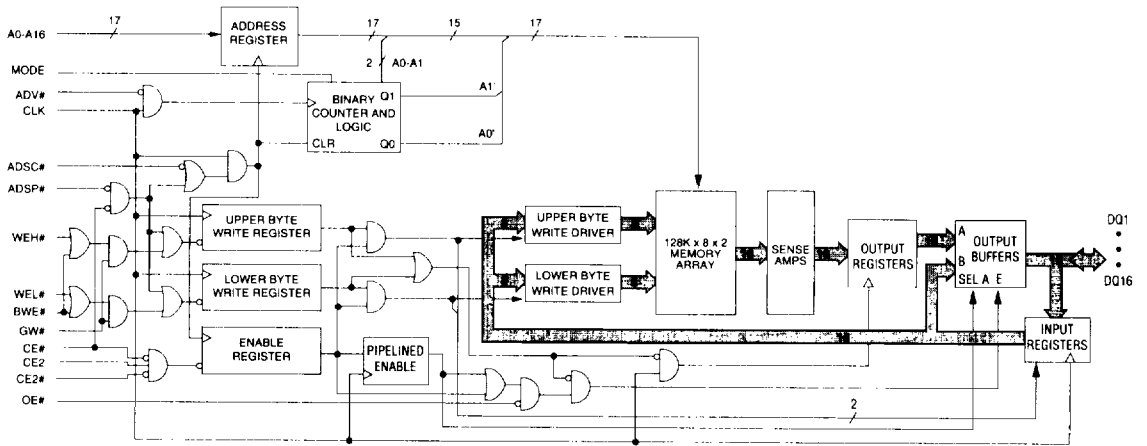

NOTE: 1. Functional Block Diagrams illustrate simplified device operation. See Truth Table, Pin Descriptions and timing diagrams for detailed information.

FUNCTIONAL BLOCK DIAGRAM
 128K x 18

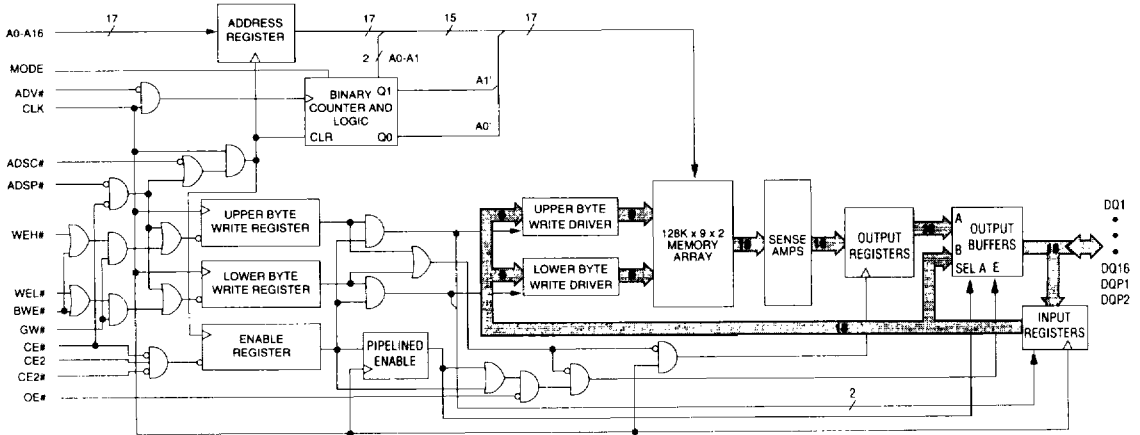



NEW

SYNCBURST PIPELINED - 3.3V I/O

PIN DESCRIPTIONS

TQFP PINS	SYMBOL	TYPE	DESCRIPTION
37, 36, 35, 34, 33, 32, 100, 99, 82, 81, 80, 48, 47, 46, 45, 44, 49	A0-A16	Input	Synchronous Address Inputs: These inputs are registered and must meet the setup and hold times around the rising edge of CLK.
94, 93	WEH#, WEL#	Input	Synchronous Byte Write Enables: These active LOW inputs allow individual bytes to be written and must meet the setup and hold times around the rising edge of CLK. A byte write enable is LOW for a WRITE cycle and HIGH for a READ cycle. WEL# controls DQ1-DQ8 and DQP1. WEH# controls DQ9-DQ16 and DQP2. Data I/O are tristated if either of these inputs are LOW and BWE# is LOW.
87	BWE#	Input	Byte Write Enable: This active LOW input permits byte write operations and must meet the setup and hold times around the rising edge of CLK.
88	GW#	Input	Global Write: This active LOW input allows a full 18-bit WRITE to occur independent of the BWE# and WEn# lines and must meet the setup and hold times around the rising edge of CLK.
89	CLK	Input	Clock: This signal registers the address, data, chip enable, byte write enables and burst control inputs on its rising edge. All synchronous inputs must meet setup and hold times around the clock's rising edge.
98	CE#	Input	Synchronous Chip Enable: This active LOW input is used to enable the device and conditions the internal use of ADSP#. This input is sampled only when a new external address is loaded.
92	CE2#	Input	Synchronous Chip Enable: This active LOW input is used to enable the device. This input is sampled only when a new external address is loaded.
97	CE2	Input	Synchronous Chip Enable: This active HIGH input is used to enable the device. This input is sampled only when a new external address is loaded.
86	OE#	Input	Output Enable: This active LOW asynchronous input enables the data I/O output drivers.
83	ADV#	Input	Synchronous Address Advance: This active LOW input is used to advance the internal burst counter, controlling burst access after the external address is loaded. A HIGH on this pin effectively causes wait states to be generated (no address advance). This pin must be HIGH at the rising edge of the first clock after an ADSP# cycle is initiated if a WRITE cycle is desired (to ensure use of correct address).
84	ADSP#	Input	Synchronous Address Status Processor: This active LOW input interrupts any ongoing burst, causing a new external address to be registered. A READ is performed using the new address, independent of the byte write enables and ADSC#, but dependent upon CE# being LOW.



PIN DESCRIPTIONS (continued)

TQFP PINS	SYMBOL	TYPE	DESCRIPTION
85	ADSC#	Input	Synchronous Address Status Controller: This active LOW input interrupts any ongoing burst, causing a new external address to be registered. A READ or WRITE is performed using the new address if CE# is LOW. ADSC# is also used to place the chip into power-down state when CE# is HIGH.
31	MODE	Input	Mode: This input selects the burst sequence. A LOW on this pin selects LINEAR BURST. A NC or HIGH on this pin selects INTERLEAVED BURST. Do not alter input state while device is operating.
64	ZZ	Input	Snooze Enable: This active HIGH asynchronous input causes the device to enter a low-power standby mode in which all data in the memory array is retained. When active, all other inputs are ignored.
58, 59, 62, 63, 68, 69, 72, 73, 8, 9, 12, 13, 18, 19, 22, 23	DQ1-DQ16	Input/ Output	SRAM Data I/O: Low Byte is DQ1-DQ8. High Byte is DQ9-DQ16. Input data must meet setup and hold times around the rising edge of CLK.
74, 24	NC/DQP1, NC/DQP2	NC/ I/O	No Connect/Parity Data I/O: On the x18 version, Low Byte Parity is DQP1. High Byte Parity is DQP2. On the x16 version, these pins are No Connect (NC).
4, 11, 14, 15, 20, 27, 41, 54, 61, 65, 70, 77, 91	Vcc	Supply	Power Supply: +3.3V +10%/-5%. Pin 14 does not have to be directly connected to Vcc as long as the input voltage is $\geq V_{IH}$.
5, 10, 17, 21, 26, 40, 55, 60, 67, 71, 76, 90	Vss	Supply	Ground: GND
38, 39, 42, 43	DNU	-	Do Not Use: These signals may either be unconnected or wired to GND to improve package heat dissipation.
1, 2, 3, 6, 7, 16, 25, 28, 29, 30, 50, 51, 52, 53, 56, 57, 66, 75, 78, 79, 95, 96	NC	-	No Connect: These signals are not internally connected. However, to improve package heat dissipation, these signals may be connected to ground.

NEW MICRON

SYNCBURST PIPELINED - 3.3V I/O

INTERLEAVED BURST ADDRESS TABLE (MODE = NC OR HIGH)

First Address (external)	Second Address (internal)	Third Address (internal)	Fourth Address (internal)
X...X00	X...X01	X...X10	X...X11
X...X01	X...X00	X...X11	X...X10
X...X10	X...X11	X...X00	X...X01
X...X11	X...X10	X...X01	X...X00

LINEAR BURST ADDRESS TABLE (MODE = GND)

First Address (external)	Second Address (internal)	Third Address (internal)	Fourth Address (internal)
X...X00	X...X01	X...X10	X...X11
X...X01	X...X10	X...X11	X...X00
X...X10	X...X11	X...X00	X...X01
X...X11	X...X00	X...X01	X...X10

PARTIAL TRUTH TABLE FOR WRITE COMMANDS

Function	GW#	BWE#	WEL#	WEH#
READ	H	H	X	X
READ	H	L	H	H
WRITE Low Byte	H	L	L	H
WRITE High Byte	H	L	H	L
WRITE all bytes	H	L	L	L
WRITE all bytes	L	X	X	X

WRITE PASS-THROUGH TRUTH TABLE

PREVIOUS CYCLE ¹		PRESENT CYCLE				NEXT CYCLE
OPERATION	WE#s	OPERATION	CE#	WE#s	OE#	OPERATION
Initiate WRITE cycle, all bytes Address = A(n-1), data = D(n-1)	All L ^{2,3}	Initiate READ cycle Register A(n), Q = D(n-1)	L	H	L	Read D(n)
Initiate WRITE cycle, all bytes Address = A(n-1), data = D(n-1)	All L ^{2,3}	No new cycle Q = D(n-1)	H	H	L	No carry-over from previous cycle
Initiate WRITE cycle, all bytes Address = A(n-1), data = D(n-1)	All L ^{2,3}	No new cycle Q = HIGH-Z	H	H	H	No carry-over from previous cycle
Initiate WRITE cycle, one byte Address = A(n-1), data = D(n-1)	One L ²	No new cycle Q = D(n-1) for one byte Q = D(pre-existing) for three bytes	H	H	L	No carry-over from previous cycle

- NOTE:**
1. Previous cycle may be either BURST or NONBURST cycle.
 2. BWE# is LOW when one or two WEN#'s are LOW.
 3. GW# LOW will yield identical results.

TRUTH TABLE

OPERATION	ADDRESS USED	CE#	CE2#	CE2	ZZ	ADSP#	ADSC#	ADV#	WRITE#	OE#	CLK	DQ
Deselected Cycle, Power-down	None	H	X	X	L	X	L	X	X	X	L-H	High-Z
Deselected Cycle, Power-down	None	L	X	L	L	L	X	X	X	X	L-H	High-Z
Deselected Cycle, Power-down	None	L	H	X	L	L	X	X	X	X	L-H	High-Z
Deselected Cycle, Power-down	None	L	X	L	L	H	L	X	X	X	L-H	High-Z
Deselected Cycle, Power-down	None	L	H	X	L	H	L	X	X	X	L-H	High-Z
SNOOZE MODE, Power-down	None	X	X	X	H	X	X	X	X	X	X	High-Z
READ Cycle, Begin Burst	External	L	L	H	L	L	X	X	X	L	L-H	Q
READ Cycle, Begin Burst	External	L	L	H	L	L	X	X	X	H	L-H	High-Z
WRITE Cycle, Begin Burst	External	L	L	H	L	H	L	X	L	X	L-H	D
READ Cycle, Begin Burst	External	L	L	H	L	H	L	X	H	L	L-H	Q
READ Cycle, Begin Burst	External	L	L	H	L	H	L	X	H	H	L-H	High-Z
READ Cycle, Continue Burst	Next	X	X	X	L	H	H	L	H	L	L-H	Q
READ Cycle, Continue Burst	Next	X	X	X	L	H	H	L	H	H	L-H	High-Z
READ Cycle, Continue Burst	Next	H	X	X	L	X	H	L	H	L	L-H	Q
READ Cycle, Continue Burst	Next	H	X	X	L	X	H	L	H	H	L-H	High-Z
WRITE Cycle, Continue Burst	Next	X	X	X	L	H	H	L	L	X	L-H	D
WRITE Cycle, Continue Burst	Next	H	X	X	L	X	H	L	L	X	L-H	D
READ Cycle, Suspend Burst	Current	X	X	X	L	H	H	H	H	L	L-H	Q
READ Cycle, Suspend Burst	Current	X	X	X	L	H	H	H	H	H	L-H	High-Z
READ Cycle, Suspend Burst	Current	H	X	X	L	X	H	H	H	L	L-H	Q
READ Cycle, Suspend Burst	Current	H	X	X	L	X	H	H	H	H	L-H	High-Z
WRITE Cycle, Suspend Burst	Current	X	X	X	L	H	H	H	L	X	L-H	D
WRITE Cycle, Suspend Burst	Current	H	X	X	L	X	H	H	L	X	L-H	D

- NOTE:**
1. X means "don't care." H means logic HIGH. L means logic LOW. WRITE#=L means any one or more byte write enable signals (WEL# or WEH#) and BWE# are LOW or GW# is LOW. WRITE#=H means all byte write enable signals are HIGH.
 2. WEL# enables WRITES to DQ1-DQ8, DQP1. WEH# enables WRITES to DQ9-DQ16, DQP2. DQP1 and DQP2 are only available on the x18 version.
 3. All inputs except OE# and ZZ must meet setup and hold times around the rising edge (LOW to HIGH) of CLK.
 4. Wait states are inserted by suspending burst.
 5. For a WRITE operation following a READ operation, OE# must be HIGH before the input data setup time and held HIGH throughout the input data hold time.
 6. This device contains circuitry that will ensure the outputs will be in High-Z during power-up.
 7. ADSP# LOW always initiates an internal READ at the L-H edge of CLK. A WRITE is performed by setting one or more byte write enable signals and BWE# LOW or GW# LOW for the subsequent L-H edge of CLK. Refer to WRITE timing diagram for clarification.

MT58LC128K16/18D8
128K x 16/18 SYNCBURST SRAM

NEW SYNCBURST PIPELINED - 3.3V I/O

MICRON

ABSOLUTE MAXIMUM RATINGS*

Voltage on Vcc Supply Relative to Vss.....	-0.5V to +4.6V
V _{IN}	-0.5V to +V _{CC} +0.5V
Storage Temperature (plastic).....	-55°C to +150°C
Junction Temperature**	+150°C
Short Circuit Output Current	100mA

*Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

**Maximum junction temperature depends upon package type, cycle time, loading, ambient temperature and airflow. See Micron Technical Note TN-05-14 for more information.

ELECTRICAL CHARACTERISTICS AND RECOMMENDED DC OPERATING CONDITIONS

(0°C ≤ T_A ≤ 70°C; V_{CC} = +3.3V +10%/-5% unless otherwise noted)

DESCRIPTION	CONDITIONS	SYMBOL	MIN	MAX	UNITS	NOTES
Input High (Logic 1) Voltage		V _{IH}	2.0	V _{CC} + 0.3	V	1, 2
Input Low (Logic 0) Voltage		V _{IL}	-0.3	0.8	V	1, 2
Input Leakage Current	0V ≤ V _{IN} ≤ V _{CC}	I _{LI}	-1	1	μA	14
Output Leakage Current	Output(s) disabled, 0V ≤ V _{IN} ≤ V _{CC}	I _{LO}	-1	1	μA	
Output High Voltage	I _{OH} = -4.0mA	V _{OH}	2.4		V	1, 11
Output Low Voltage	I _{OL} = 8.0mA	V _{OL}		0.4	V	1, 11
Supply Voltage		V _{CC}	3.135	3.6	V	1

DESCRIPTION	CONDITIONS	SYM	TYP	MAX						UNITS	NOTES
				-4.5	-5	-6	-7	-8	-9		
Power Supply Current: Operating	Device selected; all inputs ≤ V _{IL} or ≥ V _{IH} ; cycle time ≥ 1KC MIN; V _{CC} = MAX; outputs open	I _{CC}	125	350	300	250	230	150	150	mA	3, 12, 13
Power Supply Current: Idle	Device selected; V _{CC} = MAX; ADSC#, ADSP#, GW#, BW#s, ADV# ≥ V _{IH} ; all inputs ≤ V _{SS} +0.2 or ≥ V _{CC} -0.2; cycle time ≥ 1KC MIN	I _{CC1}	30	80	80	75	70	50	50	mA	3, 12, 13
CMOS Standby	Device deselected; V _{CC} = MAX; all inputs ≤ V _{SS} +0.2 or ≥ V _{CC} -0.2; all inputs static; CLK frequency = 0	I _{SB2}	0.5	5	5	5	5	5	5	mA	12, 13
TTL Standby	Device deselected; V _{CC} = MAX; all inputs ≤ V _{IL} or ≥ V _{IH} ; all inputs static; CLK frequency = 0	I _{SB3}	15	25	25	25	25	25	25	mA	12, 13
Clock Running	Device deselected; V _{CC} = MAX; all inputs ≤ V _{SS} +0.2 or ≥ V _{CC} -0.2; cycle time ≥ 1KC MIN	I _{SB4}	30	80	80	75	70	50	50	mA	12, 13



MT58LC128K16/18D8
128K x 16/18 SYNCBURST SRAM

NEW SYNCBURST PIPELINED - 3.3V I/O

CAPACITANCE

DESCRIPTION	CONDITIONS	SYMBOL	TYP	MAX	UNITS	NOTES
Control Input Capacitance	T _A = 25°C; f = 1 MHz V _{CC} = 3.3V	C _I	3	4	pF	4
Input/Output Capacitance (DQ)		C _O	6	8	pF	4
Address and Clock Input Capacitance		C _A	2.5	3	pF	4

THERMAL CONSIDERATIONS

DESCRIPTION	CONDITIONS	SYMBOL	TQFP TYP	UNITS	NOTES
Thermal resistance - Junction to Ambient	Still air, soldered on 4.25 x 1.125 inch 4-layer PCB	θ _{JA}	20	°C/W	
Thermal resistance - Junction to Case		θ _{JC}	1	°C/W	

ELECTRICAL CHARACTERISTICS AND RECOMMENDED AC OPERATING CONDITIONS

(Note 5) (0°C ≤ T_A ≤ 70°C; V_{CC} = +3.3V ±10%/±5%)

DESCRIPTION	SYM	-4.5		-5		-6		-7		-8		-9		UNITS	NOTES
		MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX		
Clock															
Clock cycle time	'KC	8		10		12		13		20		20		ns	
Clock HIGH time	'KH	3		4		4.5		5		6		6		ns	
Clock LOW time	'KL	3		4		4.5		5		6		6		ns	
Output Times															
Clock to output valid	'KQ		4.5		5		6		7		8		9	ns	
Clock to output invalid	'KQX	1.5		1.5		2		2		2		2		ns	
Clock to output in Low-Z	'KQLZ	1.5		1.5		2		2		2		2		ns	4, 6, 7
Clock to output in High-Z	'KQHZ		4.5		5		5		6		6		6	ns	4, 6, 7
OE# to output valid	'OEO		4.5		5		5		5		6		6	ns	9
OE# to output in Low-Z	'OELZ	0		0		0		0		0		0		ns	4, 6, 7
OE# to output in High-Z	'OEHZ		3		4		5		6		6		6	ns	4, 6, 7
Setup Times															
Address	'AS	2.5		2.5		2.5		2.5		3.0		3.5		ns	8, 10
Address Status (ADSC#, ADSP#)	'ADSS	2.5		2.5		2.5		2.5		3.0		3.5		ns	8, 10
Address Advance (ADV#)	'AAS	2.5		2.5		2.5		2.5		3.0		3.5		ns	8, 10
Write Signals (WEL#, WEH#, BWE#, GW#)	'WS	2.5		2.5		2.5		2.5		3.0		3.5		ns	8, 10
Data-in	'DS	2.5		2.5		2.5		2.5		3.0		3.5		ns	8, 10
Chip Enables (CE#, CE2#, CE2)	'CES	2.5		2.5		2.5		2.5		3.0		3.5		ns	8, 10
Hold Times															
Address	'AH	0.5		0.5		0.5		0.5		0.5		0.8		ns	8, 10
Address Status (ADSC#, ADSP#)	'ADSH	0.5		0.5		0.5		0.5		0.5		0.8		ns	8, 10
Address Advance (ADV#)	'AAH	0.5		0.5		0.5		0.5		0.5		0.8		ns	8, 10
Write Signals (WEL#, WEH#, BWE#, GW#)	'WH	0.5		0.5		0.5		0.5		0.5		0.8		ns	8, 10
Data-in	'DH	0.5		0.5		0.5		0.5		0.5		0.8		ns	8, 10
Chip Enables (CE#, CE2#, CE2)	'CEH	0.5		0.5		0.5		0.5		0.5		0.8		ns	8, 10

NEW

MICRON

SYNCBURST PIPELINED - 3.3V I/O

AC TEST CONDITIONS

Input pulse levels	V _{ss} to 3.0V
Input rise and fall times	2.5ns
Input timing reference levels	1.5V
Output reference levels	1.5V
Output load	See Figures 1 and 2

NOTES

1. All voltages referenced to V_{ss} (GND).
2. Overshoot: V_{IH} ≤ +4.6V for t ≤ ¹KC / 2 for I ≤ 20mA
Undershoot: V_{IL} ≥ -0.7V for t ≤ ¹KC / 2 for I ≤ 20mA
Power-up: V_{IH} ≤ +3.6V and V_{CC} ≤ 3.135V for t ≤ 200ms
3. I_{CC} is given with no output current. I_{CC} increases with greater output loading and faster cycle times.
4. This parameter is sampled.
5. Test conditions as specified with the output loading as shown in Fig. 1 unless otherwise noted.
6. Output loading is specified with C_L = 5pF as in Fig. 2. Transition is measured ±500mV from steady state voltage.
7. At any given temperature and voltage condition, ¹KQHZ is less than ¹KQLZ.
8. A WRITE cycle is defined by at least one byte write enable LOW and ADSP# HIGH for the required setup and hold times. A READ cycle is defined by all byte write enables HIGH and (ADSC# or ADV# LOW) or ADSP# LOW for the required setup and hold times.
9. OE# is a "don't care" when a byte write enable is sampled LOW.

LOAD DERATING CURVES

Micron 128K x 16 or 128K x 18 Synchronous SRAM timing is dependent upon the capacitive loading on the outputs. The data sheet is written assuming a load of 30pF. Access time changes with load capacitance as follows:

$\Delta^1KQ \approx 0.0268 \text{ ns/pF} \times \Delta C_L \text{ pF.}$
(Note: this is preliminary information subject to change.)




Fig. 1 OUTPUT LOAD EQUIVALENT




Fig. 2 OUTPUT LOAD EQUIVALENT

10. This is a synchronous device. All addresses must meet the specified setup and hold times for all rising edges of CLK when either ADSP# or ADSC# is LOW and chip enabled. All other synchronous inputs must meet the setup and hold times with stable logic levels for all rising edges of clock (CLK) when the chip is enabled. Chip enable must be valid at each rising edge of CLK (when either ADSP# or ADSC# is LOW) to remain enabled.
11. The load used for V_{OH}, V_{OL} testing is shown in Fig. 2. AC load current is higher than the shown DC values. AC I/O curves are available upon request.
12. "Device Deselected" means device is in POWER-DOWN mode as defined in the Truth Table. "Device Selected" means device is active (not in POWER-DOWN mode).
13. Typical values are measured at 3.3V, 25°C and 20ns cycle time.
14. MODE pin has an internal pull-up and exhibits an input leakage current of ±10μA.

For example, if the SRAM loading is 22pF, ΔC_L is -8pF (8pF less than rated load). The clock to valid output time of the SRAM is reduced by 0.0268 x 8 = 0.214ns. If the device is an 8ns part, the worst case ¹KQ becomes 11.79ns (approximately).

Consult the factory for copies of I/O current versus voltage curves. For capacitive loading derating curves see Micron Technical Note TN-05-20, "3.3V SRAM Capacitive Loading."

SNOOZE MODE

SNOOZE MODE is a low current, "power-down" mode in which the device is deselected and current is reduced to I_{SB2} . The duration of SNOOZE MODE is dictated by the length of time the ZZ pin is in a HIGH state. After entering SNOOZE MODE, all inputs except ZZ become gated inputs and are ignored.


The ZZ pin (pin 64) is an asynchronous, active HIGH input that causes the device to enter SNOOZE MODE. When the ZZ pin becomes a logic HIGH, I_{SB2} is guaranteed after the setup time t_{ZZ} is met. Any access pending when entering SNOOZE MODE is not guaranteed to successfully complete. Therefore, SNOOZE MODE must not be initiated until valid pending operations are completed.

SNOOZE MODE ELECTRICAL CHARACTERISTICS


DESCRIPTION	CONDITIONS	SYMBOL	MIN	MAX	UNITS	NOTES
Current during SNOOZE MODE	$ZZ \geq V_{IH}$	I_{SB2Z}		5	mA	
ZZ HIGH to SNOOZE MODE time		t_{ZZ}	$2(t_{KC})$		ns	1
SNOOZE MODE Operation recovery time		t_{RZZ}		$2(t_{KC})$	ns	1

NOTE: 1. This parameter is sampled.

SNOOZE MODE WAVEFORM

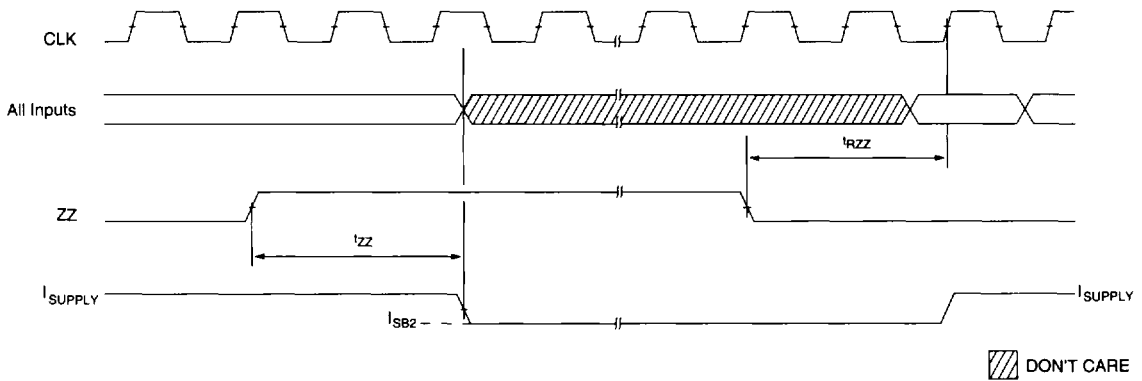

READ TIMING

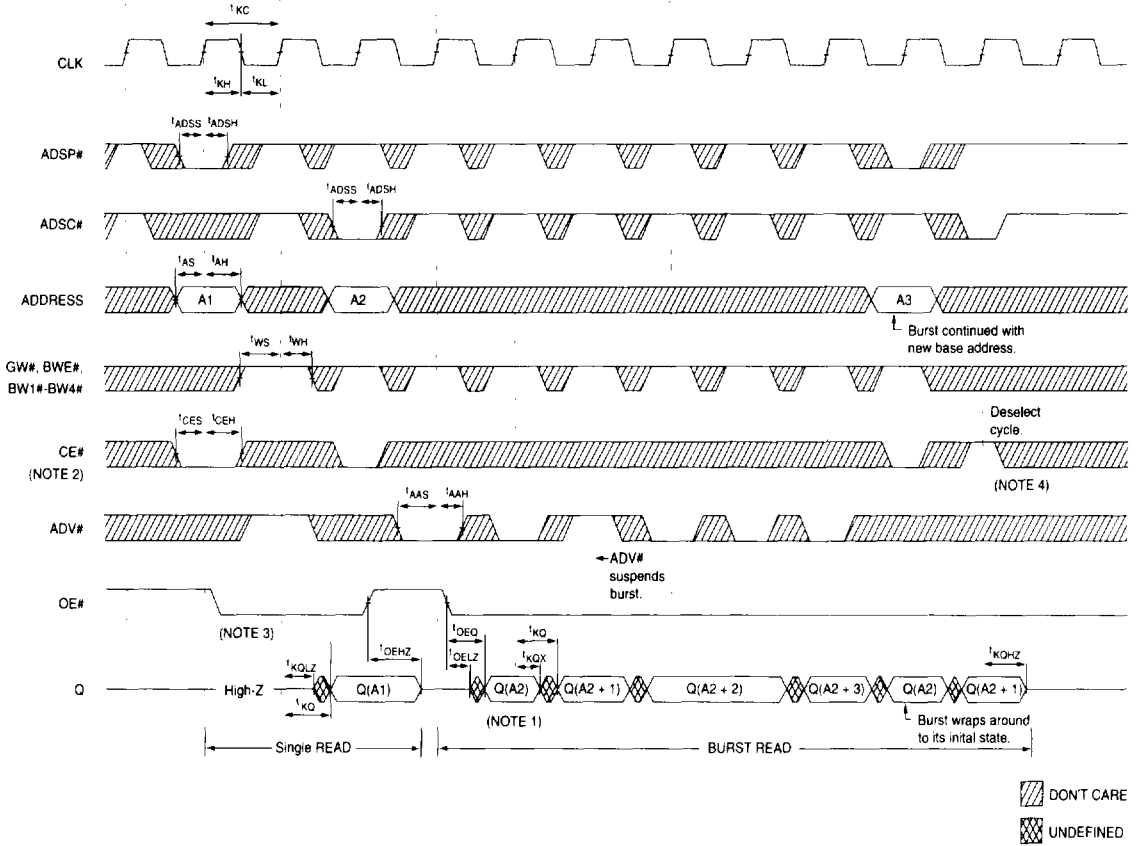


- NOTE:**
1. Q(A2) refers to output from address A2. Q(A2+1) refers to output from the next internal burst address following A2.
 2. CE2# and CE2 have timing identical to CE#. On this diagram, when CE# is LOW, CE2# is LOW and CE2 is HIGH. When CE# is HIGH, CE2# is HIGH and CE2 is LOW.
 3. Timing is shown assuming that the device was not enabled before entering into this sequence. OE# does not cause Q to be driven until after the following clock rising edge.
 4. Outputs are disabled within one clock cycle after deselect.

READ TIMING PARAMETERS

SYM	-4.5		-5		-6		UNITS
	MIN	MAX	MIN	MAX	MIN	MAX	
¹ KC	8		10		12		ns
¹ KH	3		4		4.5		ns
¹ KL	3		4		4.5		ns
¹ KQ		4.5		5		6	ns
¹ KQX	1.5		1.5		2		ns
¹ KQLZ	1.5		1.5		2		ns
¹ KQHZ		4.5		5		5	ns
¹ OEQ		4.5		5		5	ns
¹ OELZ	0		0		0		ns
¹ OEHZ		3		4		5	ns
¹ AS	2.5		2.5		2.5		ns
¹ ADSS	2.5		2.5		2.5		ns
¹ AAS	2.5		2.5		2.5		ns
¹ WS	2.5		2.5		2.5		ns
¹ CES	2.5		2.5		2.5		ns
¹ AH	0.5		0.5		0.5		ns
¹ ADSH	0.5		0.5		0.5		ns
¹ AAH	0.5		0.5		0.5		ns
¹ WH	0.5		0.5		0.5		ns
¹ CEH	0.5		0.5		0.5		ns

SYM	-7		-8		-9		UNITS
	MIN	MAX	MIN	MAX	MIN	MAX	
¹ KC	13		20		20		ns
¹ KH	5		6		6		ns
¹ KL	5		6		6		ns
¹ KQ		7		8		9	ns
¹ KQX	2		2		2		ns
¹ KQLZ	2		2		2		ns
¹ KQHZ		6		6		6	ns
¹ OEQ		5		6		6	ns
¹ OELZ	0		0		0		ns
¹ OEHZ		6		6		6	ns
¹ AS	2.5		3.0		3.5		ns
¹ ADSS	2.5		3.0		3.5		ns
¹ AAS	2.5		3.0		3.5		ns
¹ WS	2.5		3.0		3.5		ns
¹ CES	2.5		3.0		3.5		ns
¹ AH	0.5		0.5		0.8		ns
¹ ADSH	0.5		0.5		0.8		ns
¹ AAH	0.5		0.5		0.8		ns
¹ WH	0.5		0.5		0.8		ns
¹ CEH	0.5		0.5		0.8		ns

WRITE TIMING

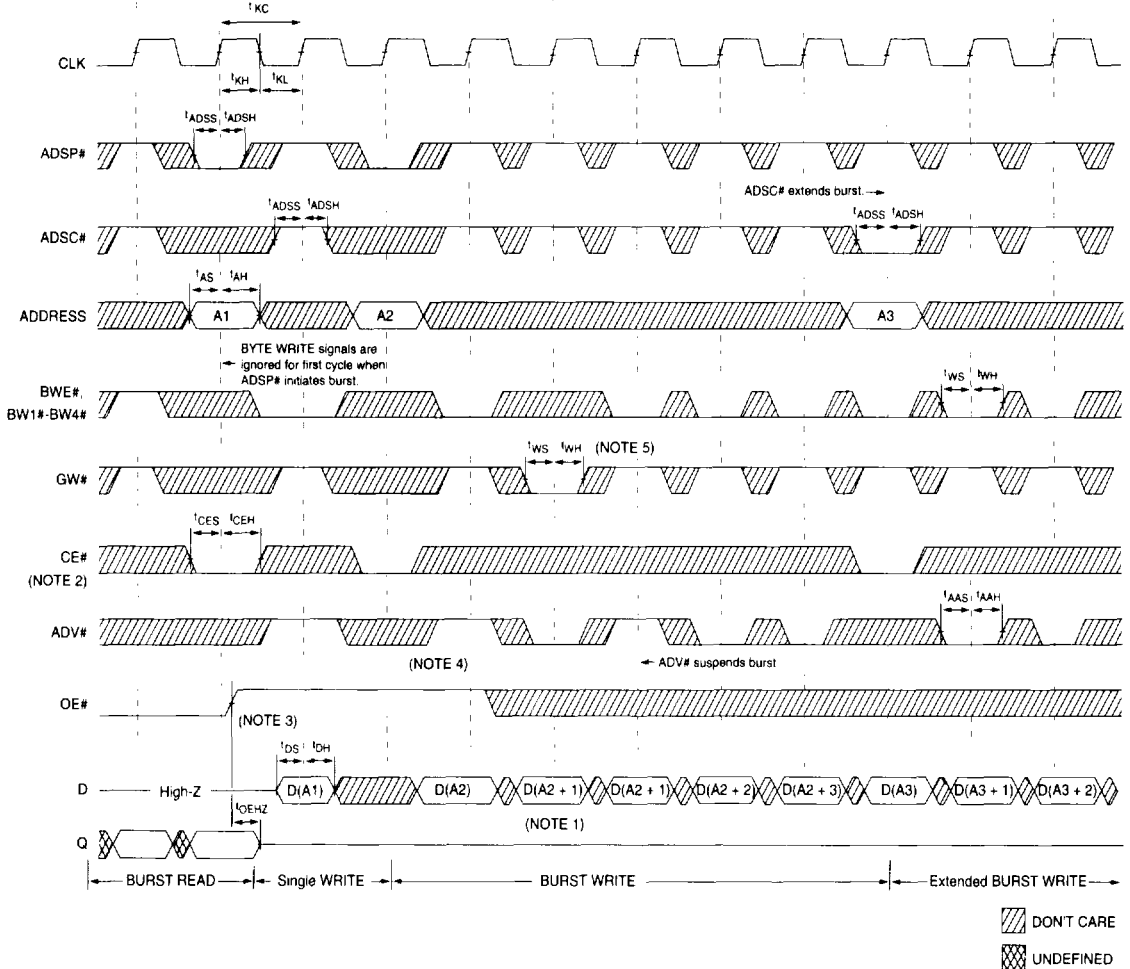


- NOTE:**
1. D(A2) refers to input for address A2. Q(A2+1) refers to input for the next internal burst address following A2.
 2. CE2# and CE2 have timing identical to CE#. On this diagram, when CE# is LOW, CE2# is LOW and CE2 is HIGH. When CE# is HIGH, CE2# is HIGH and CE2 is LOW.
 3. OE# must be HIGH before the input data setup and held HIGH throughout the data hold time. This prevents input/output data contention for the time period prior to the byte write enable inputs being sampled.
 4. ADV# must be HIGH to permit a WRITE to the loaded address.
 5. Full width WRITE can be initiated by GW# LOW or GW# HIGH and BWE#, WEL# and WEH# LOW.

WRITE TIMING PARAMETERS

SYM	-4.5		-5		-6		UNITS
	MIN	MAX	MIN	MAX	MIN	MAX	
¹ KC	8		10		12		ns
¹ KH	3		4		4.5		ns
¹ KL	3		4		4.5		ns
¹ OEHZ		3		4		5	ns
¹ AS	2.5		2.5		2.5		ns
¹ ADSS	2.5		2.5		2.5		ns
¹ AAS	2.5		2.5		2.5		ns
¹ WS	2.5		2.5		2.5		ns
¹ DS	2.5		2.5		2.5		ns
¹ CES	2.5		2.5		2.5		ns
¹ AH	0.5		0.5		0.5		ns
¹ ADSH	0.5		0.5		0.5		ns
¹ AAH	0.5		0.5		0.5		ns
¹ WH	0.5		0.5		0.5		ns
¹ DH	0.5		0.5		0.5		ns
¹ CEH	0.5		0.5		0.5		ns

SYM	-7		-8		-9		UNITS
	MIN	MAX	MIN	MAX	MIN	MAX	
¹ KC	13		20		20		ns
¹ KH	5		6		6		ns
¹ KL	5		6		6		ns
¹ OEHZ		6		6		6	ns
¹ AS	2.5		3.0		3.5		ns
¹ ADSS	2.5		3.0		3.5		ns
¹ AAS	2.5		3.0		3.5		ns
¹ WS	2.5		3.0		3.5		ns
¹ DS	2.5		3.0		3.5		ns
¹ CES	2.5		3.0		3.5		ns
¹ AH	0.5		0.5		0.8		ns
¹ ADSH	0.5		0.5		0.8		ns
¹ AAH	0.5		0.5		0.8		ns
¹ WH	0.5		0.5		0.8		ns
¹ DH	0.5		0.5		0.8		ns
¹ CEH	0.5		0.5		0.8		ns

READ/WRITE TIMING

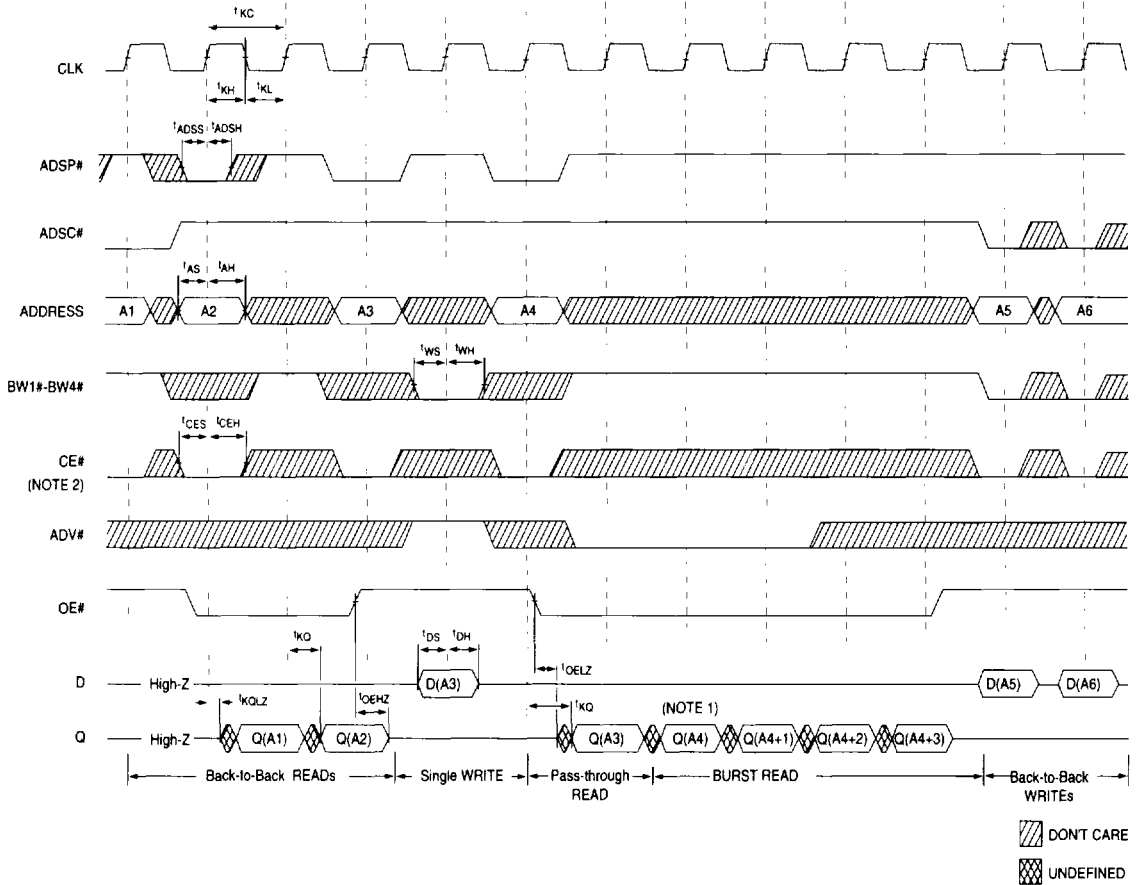

- NOTE:**
1. Q(A4) refers to output from address A4. Q(A4+1) refers to output from the next internal burst address following A4.
 2. CE2# and CE2 have timing identical to CE#. On this diagram, when CE# is LOW, CE2# is LOW and CE2 is HIGH. When CE# is HIGH, CE2# is HIGH and CE2 is LOW.
 3. The data bus (Q) remains in High-Z following a WRITE cycle unless an ADSP#, ADSC# or ADV# cycle is performed.
 4. GW# is HIGH.
 5. Back-to-back READs may be controlled by either ADSP# or ADSC#.

READ/WRITE TIMING PARAMETERS

SYM	-4.5		-5		-6		UNITS
	MIN	MAX	MIN	MAX	MIN	MAX	
¹ KC	8		10		12		ns
¹ KH	3		4		4.5		ns
¹ KL	3		4		4.5		ns
¹ KQ		4.5		5		6	ns
¹ KQLZ	1.5		1.5		2		ns
¹ OELZ	0		0		0		ns
¹ OEHZ		3		4		5	ns
¹ AS	2.5		2.5		2.5		ns
¹ ADSS	2.5		2.5		2.5		ns
¹ WS	2.5		2.5		2.5		ns
¹ DS	2.5		2.5		2.5		ns
¹ CES	2.5		2.5		2.5		ns
¹ AH	0.5		0.5		0.5		ns
¹ ADSH	0.5		0.5		0.5		ns
¹ WH	0.5		0.5		0.5		ns
¹ DH	0.5		0.5		0.5		ns
¹ CEH	0.5		0.5		0.5		ns

SYM	-7		-8		-9		UNITS
	MIN	MAX	MIN	MAX	MIN	MAX	
¹ KC	13		20		20		ns
¹ KH	5		6		6		ns
¹ KL	5		6		6		ns
¹ KQ		7		8		9	ns
¹ KQLZ	2		2		2		ns
¹ OELZ	0		0		0		ns
¹ OEHZ		6		6		6	ns
¹ AS	2.5		3.0		3.5		ns
¹ ADSS	2.5		3.0		3.5		ns
¹ WS	2.5		3.0		3.5		ns
¹ DS	2.5		3.0		3.5		ns
¹ CES	2.5		3.0		3.5		ns
¹ AH	0.5		0.5		0.8		ns
¹ ADSH	0.5		0.5		0.8		ns
¹ WH	0.5		0.5		0.8		ns
¹ DH	0.5		0.5		0.8		ns
¹ CEH	0.5		0.5		0.8		ns