

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:

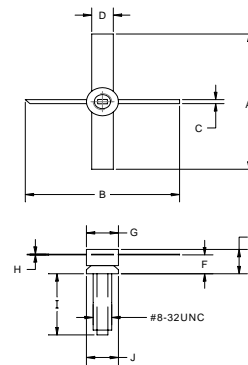
The **ASI CBSL2SS** is Designed for UHF Class A Amplifier Applications in Cellular Base Station Equipment.

FEATURES:

- $P_g = 9.0$ dB min. @ 960 MHz
- $P_{1dB} = 2.0$ Watts min. at 960 MHz
- **Omnigold™** Metalization System

MAXIMUM RATINGS

I_C	2.0 A
V_{CBO}	45 V
V_{CER}	30 V
V_{EBO}	3.5 V
P_{DISS}	7.0 W @ $T_C = 25^\circ C$
T_J	-65 °C to +200 °C
T_{STG}	-65 °C to +150 °C
θ_{JC}	25 °C/W

PACKAGE STYLE .205 4L STUD


DIM	MINIMUM inches / mm	MAXIMUM inches / mm
A	.976 / 24.800	1.000 / 25.4000
B	.976 / 24.800	1.000 / 25.4000
C	.028 / 0.700	.031 / 0.800
D	.138 / 3.500	
E	.161 / 4.100	.196 / 5.000
F	.098 / 2.500	.110 / 2.800
G	.200 / 5.100	.208 / 5.300
H	.004 / 0.100	.006 / 0.150
I	.425 / 10.800	.465 / 11.800
J	.200 / 5.100	2.05 / 5.200

ORDER CODE: ASI10868
CHARACTERISTICS $T_C = 25^\circ C$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CBO}	$I_C = 1.0$ mA	45			V
BV_{CER}	$I_C = 5.0$ mA $R_{BE} = 220 \Omega$	30			V
BV_{EBO}	$I_E = 1.0$ mA	3.5			V
I_{CBO}	$V_{CB} = 28$ V			500	μA
h_{FE}	$V_{CE} = 5.0$ V $I_C = 100$ mA	20		120	---
C_{OB}	$V_{CB} = 24$ V $f = 1.0$ MHz			3.5	pF
P_g η_C	$V_{CC} = 24$ V $P_{OUT} = 2.0$ V $f = 960$ MHz	9.0 50			dB %