


WORLDWIDE



CMD333UWC Series T-1 3/4 White LEDs

CMD333UWC Series T-1 3/4 White LEDs

DESCRIPTION AND FEATURES

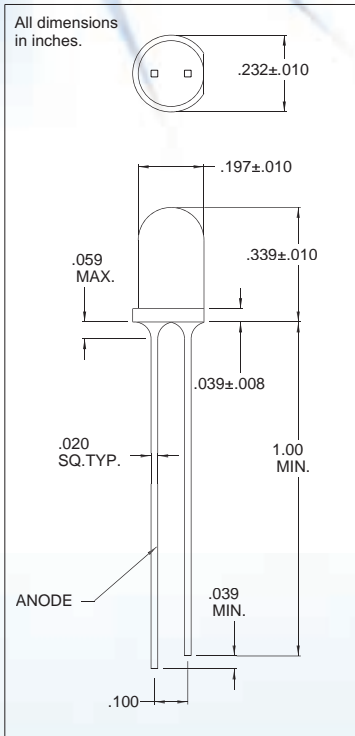

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

PART NUMBER	CMD333UWC
Output Color	White
Diffusion	Non-Diffused
Package Color	Clear
Test Current (mA)	20
Forward Voltage Typ. (V)	3.75
Forward Voltage Max. (V)	3.85
Luminous Intensity Min. (mcd)	1700
Luminous Intensity Typ. (mcd)	2300
Luminous Intensity Max. (mcd)	2600
Peak Wavelength (nm)	475
Viewing Angle (degrees)	20
Power Dissipation (mW)	-
Operating Temperature (°C)	-20 to +70
Storage Temperature (°C)	-30 to +100
Peak Forward Current Max. (Typ @ 10% duty cycle) (mA)	-
Reverse Voltage (IR=100µA) (V)	5.0
Lead Solder Time @ 260 °C	5



America:
 CML Innovative Technologies, Inc.
 147 Central Avenue
 Hackensack -NJ 07601 -USA
 Tel:1-201-489 -8989
 Fax:1-201-489 -6911
 e-mail:americas@cml-it.com

Europe:
 CML Technologies GmbH &Co.KG
 Robert-Bunsen-Str.1
 67098 Bad Dürkheim -GERMANY
 Tel:+49 (0)6322 9567-0
 Fax:+49 (0)6322 9567-88
 e-mail:europe@cml-it.com

Asia:
 CML Innovative Technologies, Inc.
 61 Aida Street
 Singapore 459975
 Tel:(65)9630 -5003
 e-mail:asia@cml-it.com