
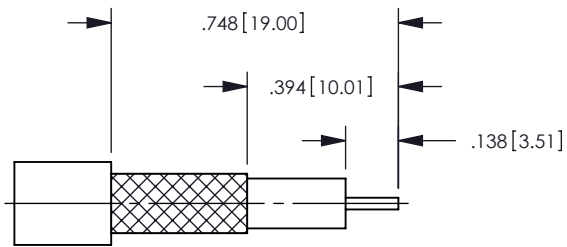


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SDPRF-206.
2. MATERIAL SPECIFICATIONS:
 BAYONET SLEEVE, BODY, CONTACT: BRASS PER ASTM B16
 INSULATOR: TEFLON PER ASTM D1710
 SPRING WASHER, OUTER CONTACT: BERYLLIUM COPPER, ASTM-B-194
 GASKET: SILICONE RUBBER
 FERRULE: COMMERCIAL BRONZE, ASTM-B-135 OR ASTM B-36
3. FINISH SPECIFICATIONS:
 BAYONET SLEEVE, BODY, FERRULE: .000100MIN NICKEL PER AMS-QQ-N-290
 OVER COPPER FLASH PER ASTM B734 (ROHS)
 CONTACT: .000050 MIN. GOLD PER ASTM B488, OVER NICKEL PER
 AMS-QQ-N-290 (ROHS)
 ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N290 OVER
 .000050 MIN COPPER PER ASTM B734
4. CONTACT AND FERRULE SHIPPED LOOSE.
5. FOR USE WITH TACHII TCX-3CHD OR EQUIVALENT.
6. FOR CRIMPING USE KINGS KTH-5000 & KTH-5005 (.232 HEX. AND .054 SQUARE).
7. ASSEMBLE TO CABLE SEE CAP-E01.
8. ELECTRIC SPECIFICATIONS:
 IMPEDANCE: 75 OHMS
 FREQUENCY RANGE: DC TO 3 GHz
 RETURN LOSS: 25 dB MIN (DC TO 3 GHz)

REV	DESCRIPTION	BY DATE	APPD
C	REVISED PER ECR-ER13719	HJN 02/12/09	CY

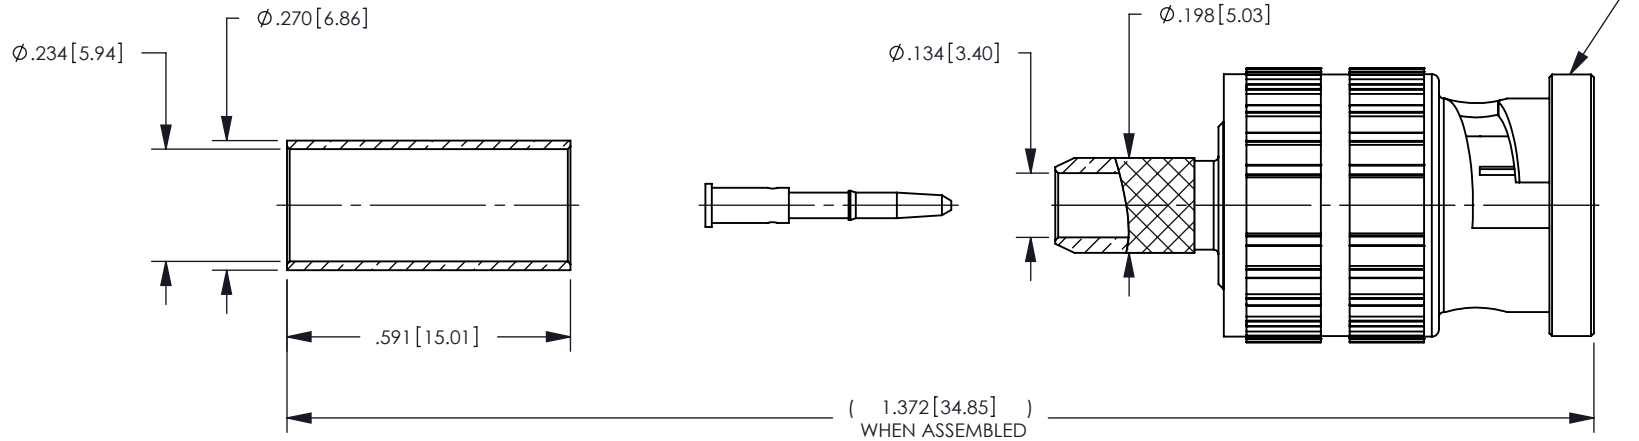

RECOMMENDED CABLE TRIM DIMENSIONS

CATALOG P/N: 2065-E00-3CH01N

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 2.5:1				 Winchester Electronics 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER DRAWING					
DRAWN	DATE	APPROVED	DATE	BNC 75 PLUG FOR TACHII TCX-3CHD (ROHS COMPLIANT)	
CY	07/31/08	CTC	09/01/08		
APPROVED	DATE	APPROVED	DATE		
XXX	XX/XX/XX	XXX	XX/XX/XX		
A SD2065-E00-3CH01N				SHT 1 OF 1	
				REV C	