

GFKE1

FM Wide Band (Emitter Grounding)

Inquire

Application

for Spurious reduction

Characteristics


GFKE1	
Zin	75 ohm Nominal
Zout	180 ohm // 5pF Nominal
Pass Band	76 up to 108MHz
Insertion Loss	3.5dB max (76 up to 108MHz)
Attenuation	15 dB min (0 up to 35MHz)
	20 dB min (170 up to 220MHz)

Number of ordered pieces

1000pcs/Reel

Dimensions

Dimension (Unit : mm)

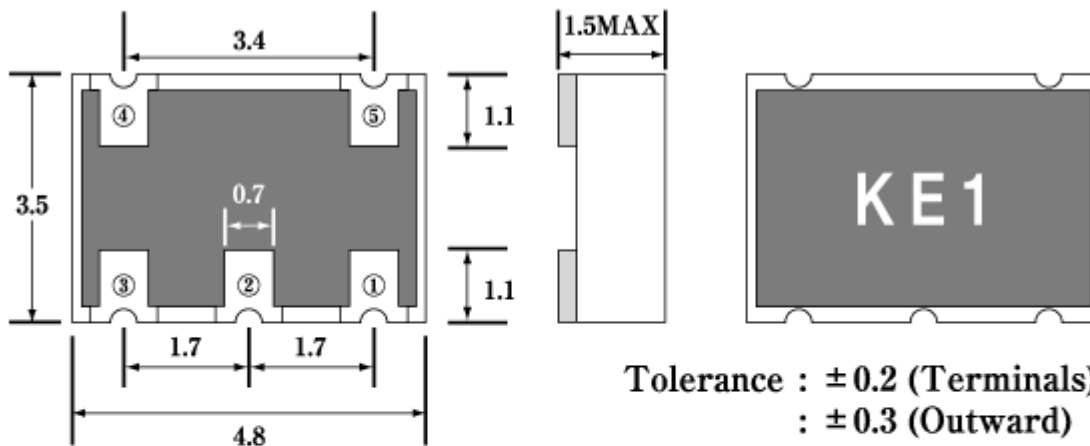

Tolerance : ±0.2 (Terminals)
: ±0.3 (Outward)


Terminal	
①	Input
②	GND
③	Output
④	Fixed
⑤	Fixed

Note

Do not connect any wiring (inclusive of grounding) to terminals No.4 and No.5.

They are provided solely for internal connections.

Frequency Data

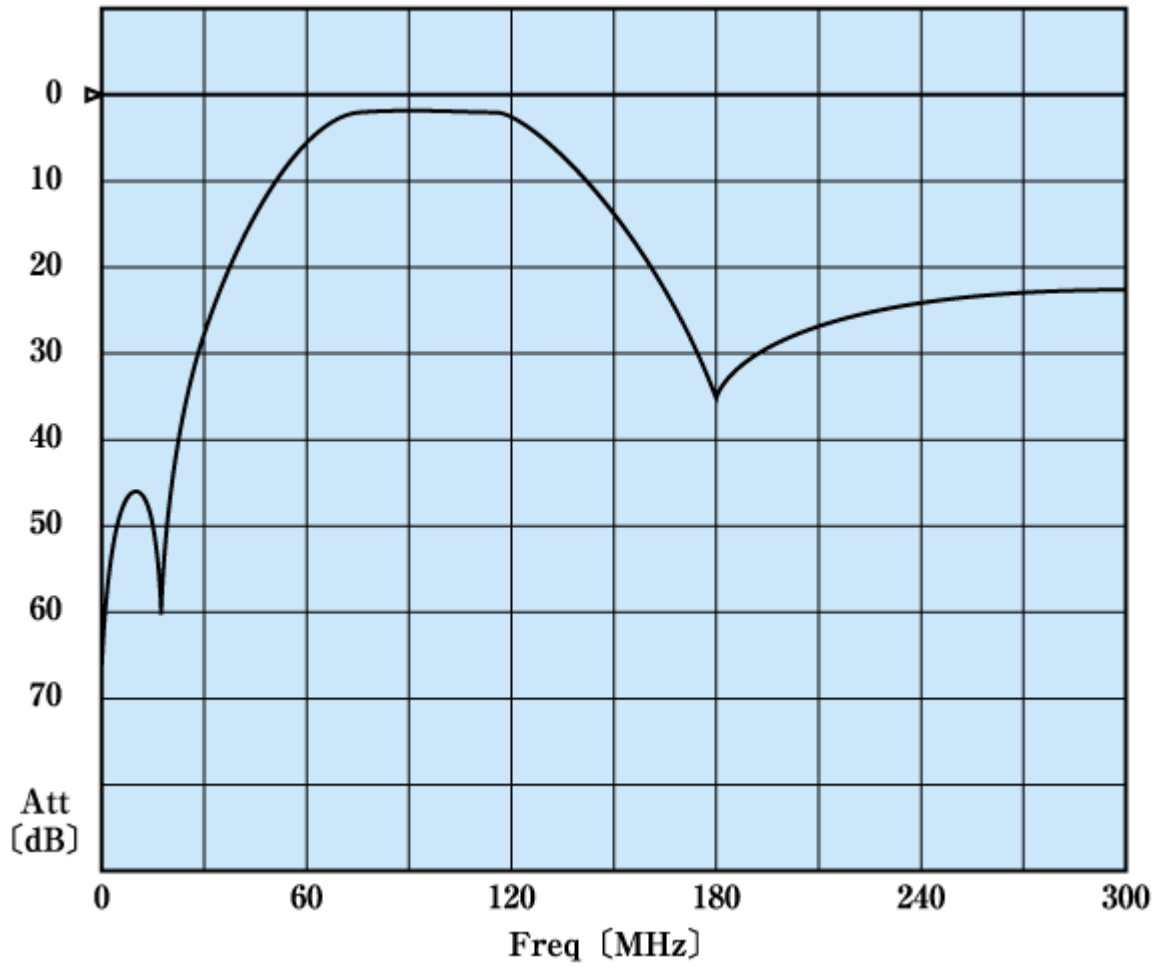

► Products II