


Part Number: NT03 10391

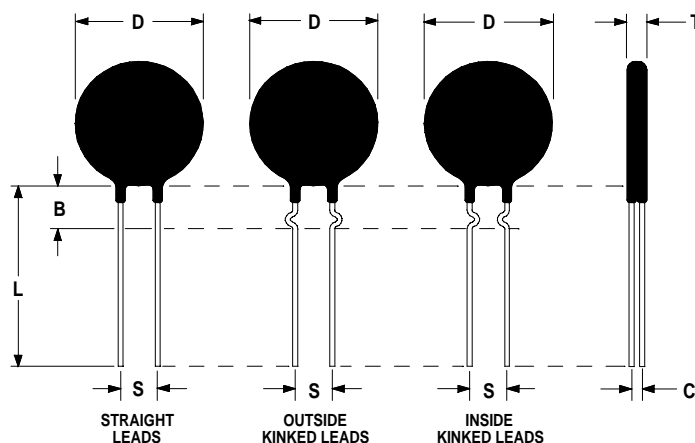

### Electrical Specifications:

Zero-Power Resistance @ 25°C	10.0K $\Omega \pm 10\%$
Resistance @ 0°C/ Resistance @ 50°C	9.2 $\pm 0.75\%$
Resistance @ 25°C/ Resistance @ 125°C	28.3 $\pm 1\%$
Beta	3965 $\pm 0.75\%$
Temp Coefficient of Resistance @ 25°C	-4.43%/°C
Operating Temperature Range	-50°C/180°C
Thermal Time Constant	$\leq 10$ seconds

### Mechanical Specifications:

D	3.0 $\pm 0.3$ mm
T	3.0 $\pm 0.3$ mm
Lead Diameter	0.5 mm Nom
S	2.80 mm Nom
L	38.0 mm Min
Straight Leads	Standard

Revision Date: March 19, 2003

**Ametherm, Inc.** 3111 N. Deer Run Road #4 Carson City, NV 89701  
 Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

[www.ametherm.com](http://www.ametherm.com)



## DATA SHEET

Part Number: NT03 10391

### Resistance Temperature Curve:

Temperature	R@T/R@25°C
-50	66.97
-45	47.25
-40	33.74
-35	24.37
-30	17.80
-25	13.13
-20	9.776
-15	7.348
-10	5.570
-5	4.257
0	3.279
5	2.550
10	1.998
15	1.576
20	1.252
25	1.000
30	0.8038
35	0.6499
40	0.5282
45	0.4316
50	0.3545
55	0.2949
60	0.2465
65	0.2070
70	0.1747
75	0.1481
80	0.1261
85	0.1077
90	0.09243
95	0.07961
100	0.06881
105	0.05977
110	0.05210
115	0.04560
120	0.04005
125	0.03529
130	0.03119
135	0.02766
140	0.02460
145	0.02194
150	0.01963

**Ametherm, Inc.** 3111 N. Deer Run Road #4 Carson City, NV 89701  
Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

[www.ametherm.com](http://www.ametherm.com)