

# DATA SHEET



## **TDA4841PS** I<sup>2</sup>C-bus autosync deflection controller for PC monitors

Product specification  
Supersedes data of 2002 Jun 24

2003 Sep 30

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

## FEATURES

### Concept features

- Full horizontal plus vertical autosync capability
- Extended horizontal frequency range from 15 to 130 kHz
- Comprehensive set of I<sup>2</sup>C-bus driven geometry adjustments and functions, including standby mode
- Very good vertical linearity
- Moire cancellation
- Start-up and switch-off sequence for safe operation of all power components
- X-ray protection
- Power dip recognition
- Flexible switched mode B+ supply function block for feedback and feed forward converter
- Internally stabilized voltage reference
- Drive signal for focus amplifiers with combined horizontal and vertical parabola waveforms
- DC controllable inputs for Extremely High Tension (EHT) compensation
- SDIP32 package.

### Synchronization

- Can handle all sync signals (horizontal, vertical, composite and sync-on-video)
- Output for video clamping (leading/trailing edge selectable by I<sup>2</sup>C-bus), vertical blanking and protection blanking
- Output for fast unlock status of horizontal synchronization and blanking on grid 1 of picture tube.

### Horizontal section

- I<sup>2</sup>C-bus controllable wide range linear picture position, pin unbalance and parallelogram correction via horizontal phase
- Frequency-locked loop for smooth catching of horizontal frequency
- Simple frequency preset of  $f_{\min}$  and  $f_{\max}$  by external resistors
- Low jitter
- Soft start for horizontal and B+ control drive signals.



### Vertical section

- I<sup>2</sup>C-bus controllable vertical picture size, picture position, linearity (S-correction) and linearity balance
- Output for I<sup>2</sup>C-bus controllable vertical sawtooth and parabola (for pin unbalance and parallelogram)
- Vertical picture size independent of frequency
- Differential current outputs for DC coupling to vertical booster
- 50 to 160 Hz vertical autosync range.

### East-West (EW) section

- I<sup>2</sup>C-bus controllable output for horizontal pincushion, horizontal size, corner and trapezium correction
- Optional tracking of EW drive waveform with line frequency selectable by I<sup>2</sup>C-bus.

### Focus section

- I<sup>2</sup>C-bus controllable output for horizontal and vertical parabolas
- Vertical parabola is independent of frequency and tracks with vertical adjustments
- Horizontal parabola independent of frequency
- Adjustable pre-correction of delay in focus output stage.

## I<sup>2</sup>C-bus autosync deflection controller for PC monitors

## TDA4841PS

### GENERAL DESCRIPTION

The TDA4841PS is a high performance and efficient solution for autosync monitors. All functions are controllable by the I<sup>2</sup>C-bus.

The TDA4841PS provides synchronization processing, horizontal and vertical synchronization with full autosync capability and very short settling times after mode changes. External power components are given a great deal of protection. The IC generates the drive waveforms for DC-coupled vertical boosters such as TDA486x and TDA835x.

The TDA4841PS provides extended functions e.g. as a flexible B+ control, an extensive set of geometry control facilities, and a combined output for horizontal and vertical focus signals.

Together with the I<sup>2</sup>C-bus driven Philips TDA488x video processor family, a very advanced system solution is offered.

### QUICK REFERENCE DATA

| SYMBOL                        | PARAMETER   | MIN.  | TYP.  | MAX. | UNIT |
|-------------------------------|---|-------|-------|------|------|
| V <sub>CC</sub>               | supply voltage                                    | 9.2   | –     | 13.2 | V    |
| I <sub>CC</sub>               | supply current                                    | –     | 68    | –    | mA   |
| I <sub>CC(stb)</sub>          | supply current during standby mode                | –     | 9     | –    | mA   |
| V <sub>SIZE</sub>             | vertical size                                     | 60    | –     | 100  | %    |
| V <sub>VGA</sub>              | VGA overscan for vertical size                    | –     | 16.8  | –    | %    |
| V <sub>POS</sub>              | vertical position                                 | –     | ±11.5 | –    | %    |
| V <sub>LIN</sub>              | vertical linearity (S-correction)                 | –2    | –     | –46  | %    |
| V <sub>LINBAL</sub>           | vertical linearity balance                        | –     | ±1.25 | –    | %    |
| V <sub>H<sub>SIZE</sub></sub> | horizontal size voltage                           | 0.13  | –     | 3.6  | V    |
| V <sub>H<sub>PIN</sub></sub>  | horizontal pincushion voltage (EW parabola)       | 0.04  | –     | 1.42 | V    |
| V <sub>H<sub>HEHT</sub></sub> | horizontal size modulation voltage                | 0.02  | –     | 0.69 | V    |
| V <sub>H<sub>TRAP</sub></sub> | horizontal trapezium correction                   | –     | ±0.5  | –    | V    |
| V <sub>H<sub>CORT</sub></sub> | horizontal corner correction at top of picture    | –0.64 | –     | +0.2 | V    |
| V <sub>H<sub>CORB</sub></sub> | horizontal corner correction at bottom of picture | –0.64 | –     | +0.2 | V    |
| H <sub>POS</sub>              | horizontal position                               | –     | ±13   | –    | %    |
| H <sub>PARAL</sub>            | horizontal parallelogram                          | –     | ±1.5  | –    | %    |
| H <sub>PINBAL</sub>           | EW pin unbalance                                  | –     | ±1.5  | –    | %    |
| T <sub>amb</sub>              | ambient temperature                               | –20   | –     | +70  | °C   |


### ORDERING INFORMATION

| TYPE NUMBER | PACKAGE |   |          |
|-------------|---------|---|----------|
|             | NAME    | DESCRIPTION   | VERSION  |
| TDA4841PS   | SDIP32  | plastic shrink dual in-line package; 32 leads (400 mil) | SOT232-1 |

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

## TDA4841PS

### BLOCK DIAGRAM

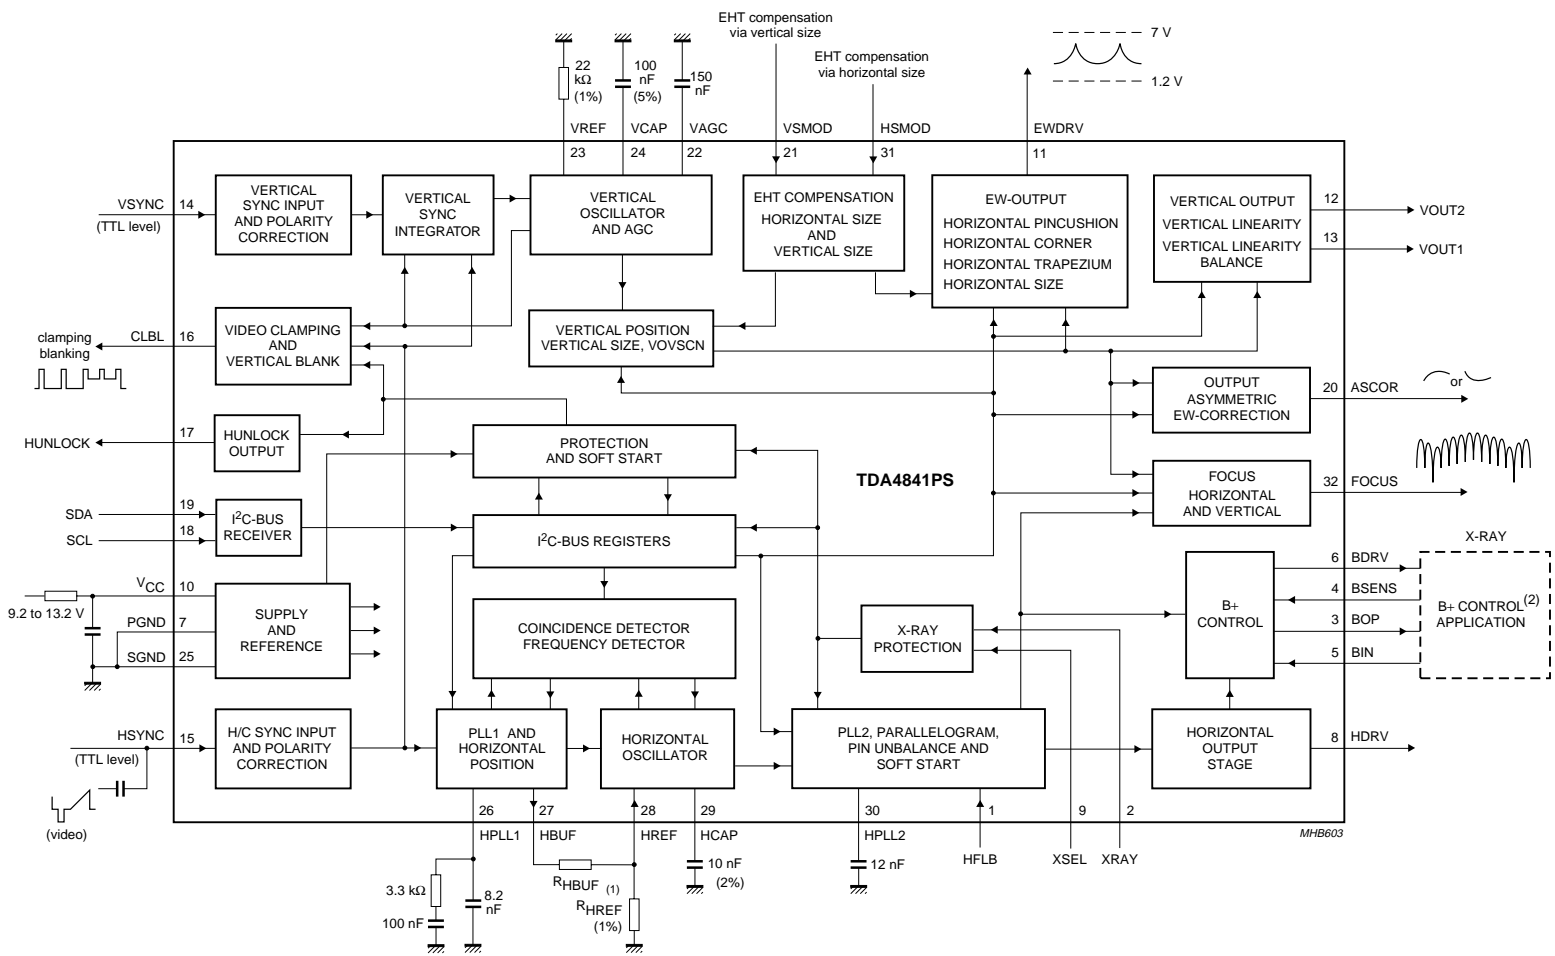

(1) For the calculation of  $f_H$  range see Section "Calculation of line frequency range".  
 (2) See Figs 25 and 26.

Fig.1 Block diagram and application circuit.

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

## PINNING

| SYMBOL          | PIN | DESCRIPTION   |
|-----------------|-----|---|
| HFLB            | 1   | horizontal flyback input  |
| XRAY            | 2   | X-ray protection input  |
| BOP             | 3   | B+ control OTA output   |
| BSENS           | 4   | B+ control comparator input   |
| BIN             | 5   | B+ control OTA input  |
| BDRV            | 6   | B+ control driver output  |
| PGND            | 7   | power ground  |
| HDRV            | 8   | horizontal driver output  |
| XSEL            | 9   | select input for X-ray reset  |
| V <sub>CC</sub> | 10  | supply voltage  |
| EWDRV           | 11  | EW waveform output  |
| VOUT2           | 12  | vertical output 2 (ascending sawtooth)                                |
| VOUT1           | 13  | vertical output 1 (descending sawtooth)                               |
| VSYNC           | 14  | vertical synchronization input  |
| HSYNC           | 15  | horizontal/composite synchronization input                            |
| CLBL            | 16  | video clamping pulse/vertical blanking output                         |
| HUNLOCK         | 17  | horizontal synchronization unlock/protection/vertical blanking output |
| SCL             | 18  | I <sup>2</sup> C-bus clock input                                      |
| SDA             | 19  | I <sup>2</sup> C-bus data input                                       |
| ASCOR           | 20  | output for asymmetric EW corrections                                  |
| VSMOD           | 21  | input for EHT compensation (via vertical size)                        |
| VAGC            | 22  | external capacitor for vertical amplitude control                     |
| VREF            | 23  | external resistor for vertical oscillator                             |
| VCAP            | 24  | external capacitor for vertical oscillator                            |
| SGND            | 25  | signal ground   |
| HPLL1           | 26  | external filter for PLL1  |
| HBUF            | 27  | buffered f/v voltage output   |
| HREF            | 28  | reference current input for horizontal oscillator                     |
| HCAP            | 29  | external capacitor for horizontal oscillator                          |
| HPLL2           | 30  | external filter for PLL2/soft start                                   |
| HSMOD           | 31  | input for EHT compensation (via horizontal size)                      |
| FOCUS           | 32  | output for horizontal and vertical focus                              |

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

## TDA4841PS

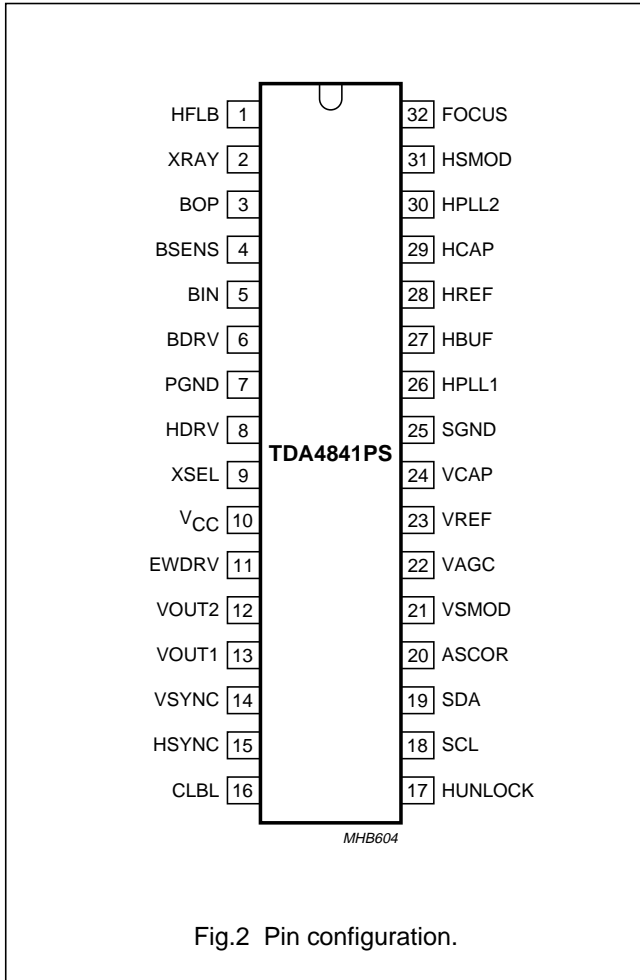


Fig.2 Pin configuration.

### FUNCTIONAL DESCRIPTION

#### Horizontal sync separator and polarity correction

HSYNC (pin 15) is the input for horizontal synchronization signals, which can be DC-coupled TTL signals (horizontal or composite sync) and AC-coupled negative-going video sync signals. Video syncs are clamped to 1.28 V and sliced at 1.4 V. This results in a fixed absolute slicing level of 120 mV related to sync top.

For DC-coupled TTL signals the input clamping current is limited. The slicing level for TTL signals is 1.4 V.

The separated sync signal (either video or TTL) is integrated on an internal capacitor to detect and normalize the sync polarity.

Normalized horizontal sync pulses are used as input signals for the vertical sync integrator, the PLL1 phase detector and the frequency-locked loop.

#### Vertical sync integrator

Normalized composite sync signals from HSYNC are integrated on an internal capacitor in order to extract vertical sync pulses. The integration time is dependent on the horizontal oscillator reference current at HREF (pin 28). The integrator output directly triggers the vertical oscillator.

#### Vertical sync slicer and polarity correction

Vertical sync signals (TTL) applied to VSYNC (pin 14) are sliced at 1.4 V. The output signal of the sync slicer is integrated on an internal capacitor to detect and normalize the sync polarity. The output signals of vertical sync integrator and sync normalizer are disjuncted before they are fed to the vertical oscillator.

#### Video clamping/vertical blanking generator

The video clamping/vertical blanking signal at CLBL (pin 16) is a two-level sandcastle pulse which is especially suitable for video ICs such as the TDA488x family, but also for direct applications in video output stages.

The upper level is the video clamping pulse, which is triggered by the horizontal sync pulse. Via I<sup>2</sup>C-bus control, either the leading or trailing edge can be selected by setting control bit CLAMP. The width of the video clamping pulse is determined by an internal single-shot multivibrator.

The lower level of the sandcastle pulse is the vertical blanking pulse, which is derived directly from the internal oscillator waveform. It is started by the vertical sync and stopped with the start of the vertical scan. This results in optimum vertical blanking. Via I<sup>2</sup>C-bus control, two different vertical blanking times are accessible by control bit VBLK.

Blanking will be activated continuously, if one of the following conditions is true:

- Soft start of horizontal and B+ drive (voltage at HPLL2 (pin 30) pulled down externally or by the I<sup>2</sup>C-bus)
- PLL1 is unlocked while frequency-locked loop is in search mode
- No horizontal flyback pulses at HFLB (pin 1)
- X-ray protection is activated
- Supply voltage at V<sub>CC</sub> (pin 10) is low (see Fig.22).

Via I<sup>2</sup>C-bus control, horizontal unlock blanking can be switched off by control bit BLKDIS while vertical blanking is maintained.

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

## TDA4841PS

### Frequency-locked loop

The frequency-locked loop can lock the horizontal oscillator over a wide frequency range. This is achieved by a combined search and PLL operation. The frequency range is preset by two external resistors and the

recommended maximum ratio is  $\frac{f_{max}}{f_{min}} = 6.5$

This can, for instance, be a range from 15.625 to 90 kHz with all tolerances included.

Without a horizontal sync signal the oscillator will be free-running at  $f_{min}$ . Any change of sync conditions is detected by the internal coincidence detector. A deviation of more than 4% between horizontal sync and oscillator frequency will switch the horizontal section into search mode. This means that PLL1 control currents are switched off immediately. The internal frequency detector then starts tuning the oscillator. Very small DC currents at HPLL1 (pin 26) are used to perform this tuning with a well defined change rate. When coincidence between horizontal sync and oscillator frequency is detected, the search mode is first replaced by a soft-lock mode which lasts for the first part of the next vertical period. The soft-lock mode is then replaced by a normal PLL operation. This operation ensures a smooth tuning and avoids fast changes of horizontal frequency during catching.

In this concept it is not allowed to load HPLL1. The frequency dependent voltage at this pin is fed internally to HBUF (pin 27) via a sample-and-hold and buffer stage. The sample-and-hold stage removes all disturbances caused by horizontal sync or composite vertical sync from the buffered voltage. An external resistor connected between pins HBUF and HREF defines the frequency range.

### Out-of-lock indication (pin HUNLOCK)

Pin HUNLOCK is floating during search mode or if a protection condition is true. All this can be detected by the microcontroller if a pull-up resistor is connected to its own supply voltage.

For an additional fast vertical blanking at grid 1 of the picture tube, a 1 V signal referenced to ground is available at this output. Also the continuous protection blanking (see Section "Video clamping/vertical blanking generator") is available at this pin. Via I<sup>2</sup>C-bus control, the control bit BLKDIS can switch off horizontal unlock blanking while vertical blanking is maintained.

### Horizontal oscillator

The horizontal oscillator is of the relaxation type and requires a capacitor of 10 nF at HCAP (pin 29). For optimum jitter performance the value of 10 nF must not be changed.

The minimum oscillator frequency is determined by a resistor connected between pin HREF and ground. A resistor connected between pins HREF and HBUF defines the frequency range.

The reference current at pin HREF also defines the integration time constant of the vertical sync integration.

### Calculation of line frequency range

First the oscillator frequencies  $f_{min}$  and  $f_{max}$  have to be calculated. This is achieved by adding the spread of the relevant components to the highest and lowest sync frequencies  $f_{sync(min)}$  and  $f_{sync(max)}$ . The oscillator is driven by the currents in  $R_{HREF}$  and  $R_{HBUF}$ .

Table 1 describes a 31.45 to 90 kHz application.

**Table 1** Calculation of total spread

| spread of            | for $f_{max}$ | for $f_{min}$ |
|----------------------|---------------|---------------|
| IC                   | ±3%           | ±5%           |
| $C_{HCAP}$           | ±2%           | ±2%           |
| $R_{HREF}, R_{HBUF}$ | ±2%           | ±2%           |
| Total                | ±7%           | ±9%           |

Thus the typical frequency range of the oscillator in this example is:

$$f_{max} = f_{sync(max)} \times 1.07 = 96.3 \text{ kHz}$$

$$f_{min} = \frac{f_{sync(min)}}{1.09} = 28.4 \text{ kHz}$$

The resistors  $R_{HREF}$  and  $R_{HBUFpar}$  can be calculated with the following formulae:

$$R_{HREF} = \frac{78 \times \text{kHz} \times \text{k}\Omega}{f_{min} + 0.0012 \times f_{min}^2 [\text{kHz}]} = 2.61 \text{ k}\Omega$$

$$R_{HBUFpar} = \frac{78 \times \text{kHz} \times \text{k}\Omega}{f_{max} + 0.0012 \times f_{max}^2 [\text{kHz}]} = 726 \text{ }\Omega$$

The resistor  $R_{HBUFpar}$  is calculated as the value of  $R_{HREF}$  and  $R_{HBUF}$  in parallel.

## I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

The formulae for  $R_{HBUF}$  additionally takes into account the voltage swing across this resistor:

$$R_{HBUF} = \frac{R_{HREF} \times R_{HBUFpar}}{R_{HREF} - R_{HBUFpar}} \times 0.8 = 805 \Omega$$

### PLL1 phase detector

The phase detector is a standard type using switched current sources, which are independent of the horizontal frequency. It compares the middle of horizontal sync with a fixed point on the oscillator sawtooth voltage. The PLL1 loop filter is connected to HPLL1 (pin 26).

See also Section "Horizontal position adjustment and corrections".

### Horizontal position adjustment and corrections

Via register HPOS the I<sup>2</sup>C-bus allows a linear adjustment of the relative phase between the horizontal sync and oscillator sawtooth (in PLL1 loop). Once adjusted, the relative phase remains constant over the whole frequency range.

Via registers HPARAL and HPINBAL correction of pin unbalance and parallelogram is achieved by modulating the phase between oscillator sawtooth and horizontal flyback (in loop PLL2). If those asymmetric EW corrections are performed in the deflection stage, both registers can be disconnected from horizontal phase via control bit ACD. This does not change the output at pin ASCOR.

### Horizontal moire cancellation

To achieve a cancellation of horizontal moire (also known as 'video moire'), the horizontal frequency is divided-by-two for a modulation of the horizontal phase via PLL2. The amplitude is controlled by register HMOIRE. To avoid a visible structure on screen the polarity changes with half the vertical frequency. Control bit MOD disables the moire cancellation function.

### PLL2 phase detector

The PLL2 phase detector is similar to the PLL1 detector and compares the line flyback pulse at HFLB (pin 1) with the oscillator sawtooth voltage. The control currents are independent of the horizontal frequency. The PLL2 detector thus compensates for the delay in the external horizontal deflection circuit by adjusting the phase of the HDRV (pin 8) output pulse.

An external modulation of the PLL2 phase is not allowed, because this would disturb the pre-correction of the H-focus parabola.

### Soft start and standby

If HPLL2 is pulled to ground, either by an external DC current or by resetting the register SOFTST, horizontal output pulses and B+ control driver pulses are inhibited. This means that HDRV (pin 8), BDRV (pin 6), VOUT1 (pin 13) and VOUT2 (pin 12) are floating in this state. PLL2 and the frequency-locked loop are disabled, CLBL (pin 16) provides a continuous blanking signal and HUNLOCK (pin 17) is floating.

This option can be used for soft start, protection and power-down modes. When the HPLL2 pin is released again, an automatic soft start sequence on the horizontal drive as well as on the B+ drive output will be performed (see Fig.22).

A soft start can only be performed if the supply voltage for the IC is 8.6 V at minimum.

The soft start timing is determined by the filter capacitor at HPLL2 (pin 30), which is charged with a constant current during soft start. If the voltage at pin 30 (HPLL2) reaches 1.1 V, the vertical output currents are enabled. At 1.8 V the horizontal driver stage generates very small output pulses. The width of these pulses increases with the voltage at HPLL2 until the final duty cycle is reached. The voltage at HPLL2 increases further and performs a soft start at BDRV (pin 6) as well. After BDRV has reached full duty cycle, the voltage at HPLL2 continues to rise until HPLL2 enters its normal operating range. The internal charge current is now disabled. Finally PLL2 and the frequency-locked loop are activated. If both functions reach normal operation, HUNLOCK (pin 17) switches from the floating status to normal vertical blanking, and continuous blanking at CLBL (pin 16) is removed.

### Output stage for line drive pulses [HDRV (pin 8)]

An open-collector output stage allows direct drive of an inverting driver transistor because of a low saturation voltage of 0.3 V at 20 mA. To protect the line deflection transistor, the output stage is disabled (floating) for low supply voltage at  $V_{CC}$  (see Fig.26).

The duty cycle of line drive pulses is slightly dependent on the actual horizontal frequency. This ensures optimum drive conditions over the whole frequency range.



## I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

### X-ray protection

The X-ray protection input XRAY (pin 2) provides a voltage detector with a precise threshold. If the input voltage at XRAY exceeds this threshold for a certain period of time, control bit SOFTST is reset, which switches the IC into protection mode. In this mode several pins are forced into defined states:

HUNLOCK (pin 17) is floating

The capacitor connected to HPLL2 (pin 30) is discharged

Horizontal output stage (HDRV) is floating

B+ control driver stage (BDRV) is floating

Vertical output stages (VOUT1 and VOUT2) are floating

CLBL provides a continuous blanking signal.

There are two different ways to restart the IC:

1. XSEL (pin 9) is open-circuit or connected to ground. The control bit SOFTST must be set to logic 1 via the I<sup>2</sup>C-bus. The IC then returns to normal operation via soft start.
2. XSEL is connected to V<sub>CC</sub> via an external resistor. The supply voltage of the IC must be switched off for a certain time before the IC can be restarted again using the standard power-on procedure.

### Vertical oscillator and amplitude control

This stage is designed for fast stabilization of vertical size after changes in sync frequency conditions. The free-running frequency  $f_{fr(V)}$  is determined by the resistor  $R_{VREF}$  connected to pin 23 and the capacitor  $C_{VCAP}$  connected to pin 24. The value of  $R_{VREF}$  is not only optimized for noise and linearity performance in the whole vertical and EW section, but also influences several internal references. Therefore the value of  $R_{VREF}$  must not be changed. Capacitor  $C_{VCAP}$  should be used to select the free-running frequency of the vertical oscillator in accordance with the following formula:

$$f_{fr(V)} = \frac{1}{10.8 \times R_{VREF} \times C_{VCAP}}$$

To achieve a stabilized amplitude the free-running frequency  $f_{fr(V)}$ , without adjustment, should be at least 10% lower than the minimum trigger frequency. The contributions shown in Table 2 can be assumed.

**Table 2** Calculation of  $f_{fr(V)}$  total spread

| Contributing elements   |     |
|---|-----|
| Minimum frequency offset between $f_{fr(V)}$ and lowest trigger frequency | 10% |
| Spread of IC  | ±3% |
| Spread of $R_{VREF}$  | ±1% |
| Spread of $C_{VCAP}$  | ±5% |
| Total   | 19% |

Result for 50 to 160 Hz application:

$$f_{fr(V)} = \frac{50 \text{ Hz}}{1.19} = 42 \text{ Hz}$$

The AGC of the vertical oscillator can be disabled by setting control bit AGCDIS via the I<sup>2</sup>C-bus. A precise external current has to be injected into VCAP (pin 24) to obtain the correct vertical size. This special application mode can be used when the vertical sync pulses are serrated (shifted); this condition is found in some display modes, e.g. when using a 100 Hz upconverter for video signals.

**Application hint:** VAGC (pin 22) has a high input impedance during scan. Therefore, the pin must not be loaded externally; otherwise non-linearities in the vertical output currents may occur due to the changing charge current during scan.

### Adjustment of vertical size, VGA overscan and EHT compensation

There are four different ways to adjust the amplitude of the differential output currents at VOUT1 and VOUT2:

1. Register VGAIN changes the vertical size without affecting any other output signal of the IC; this adjustment is meant for factory alignments.
2. Register VSIZE changes not only the vertical size, but also provides the correct tracking of all other related waveforms (see Section "Tracking of vertical adjustments"); this register should be used for user adjustments.
3. For the VGA350 mode the register VOVSCN can activate a +17% step in vertical size.
4. VSMOD (pin 21) can be used for a DC controlled EHT compensation of vertical size by correcting the differential output currents at VOUT1 and VOUT2; VSMOD does not affect the EW waveforms, vertical focus, pin unbalance and parallelogram corrections.

## I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

### Adjustment of vertical position, vertical linearity and vertical linearity balance

Register VOFFS provides a DC shift at the sawtooth output VOUT1 and VOUT2 (pins 13 and 12) without affecting any other output waveform. This adjustment is meant for factory alignments.

Register VPOS provides a DC shift at the sawtooth output VOUT1 and VOUT2 with correct tracking of all other related waveforms (see Section "Tracking of vertical adjustments"). This register should be used for user adjustments. Due to the tracking the whole picture moves vertically while maintaining the correct geometry.

Register VLIN is used to adjust the amount of vertical S-correction in the output signal. This function can be switched off by control bit VSC.

Register VLINBAL is used to correct the unbalance of vertical S-correction in the output signal.

### Tracking of vertical adjustments

The adjustments via registers VSIZE, VOVSCN and VPOS also affect the waveforms of horizontal pincushion, vertical linearity (S-correction), vertical linearity balance, focus parabola, pin unbalance and parallelogram correction. The result of this interaction is that no readjustment of these parameters is necessary after an user adjustment of vertical picture size and vertical picture position.

### Adjustment of vertical moire cancellation

To achieve a cancellation of vertical moire (also known as 'scan moire') the vertical picture position can be modulated by half the vertical frequency. The amplitude of the modulation is controlled by register VMOIRE and can be switched off via control bit MOD.

### Horizontal pincushion (including horizontal size, corner correction and trapezium correction)

EWDRV (pin 11) provides a complete EW drive waveform. The components horizontal pincushion, horizontal size, corner correction and trapezium correction are controlled by the registers HPIN, HSIZE, HCORT, HCORB and HTRAP.

The corner correction can be adjusted separately for the top (HCORT) and bottom (HCORB) part of the picture.

The pincushion (EW parabola) amplitude, corner and trapezium correction track with vertical picture size (VSIZE) and also with the adjustment for vertical picture

position (VPOS). The corner correction does not track with horizontal pincushion (HPIN).

Further the horizontal pincushion amplitude, corner and trapezium correction track with the horizontal picture size, which is adjusted via register HSIZE and the analog modulation input HSMOD. If the DC component in the EWDRV output signal is increased via HSIZE or I<sub>HSMOD</sub>, the pincushion, corner and trapezium component of the EWDRV output will be reduced by a factor of

$$1 - \frac{V_{\text{HSIZE}} + V_{\text{HEHT}} \left(1 - \frac{V_{\text{HSIZE}}}{14.4 \text{ V}}\right)}{14.4 \text{ V}}$$

The value 14.4 V is a virtual voltage for calculation only. The output pin can not reach this value, but the gain (and DC bias) of the external application should be such that the horizontal deflection is reduced to zero when EWDRV would reach 14.4 V.

HSMOD (pin 31) can be used for a DC controlled EHT compensation by correcting horizontal size, horizontal pincushion, corner and trapezium. The control range at this pin tracks with the actual value of HSIZE. For an increasing DC component V<sub>HSIZE</sub> in the EWDRV output signal, the DC component V<sub>HEHT</sub> caused by I<sub>HSMOD</sub> will be

reduced by a factor of  $1 - \frac{V_{\text{HSIZE}}}{14.4 \text{ V}}$  as shown in the equation above.

The whole EWDRV voltage is calculated as follows:

$$V_{\text{EWDRV}} = 1.2 \text{ V} + [V_{\text{HSIZE}} + V_{\text{HEHT}} \times f(\text{HSIZE}) + (V_{\text{HPIN}} + V_{\text{HCOR}} + V_{\text{HTRAP}}) \times g(\text{HSIZE}, \text{HSMOD})] \times h(I_{\text{HREF}})$$

where:

$$V_{\text{HEHT}} = \frac{I_{\text{HSMOD}}}{120 \mu\text{A}} \times 0.69$$

$$f(\text{HSIZE}) = 1 - \frac{V_{\text{HSIZE}}}{14.4 \text{ V}}$$

$$g(\text{HSIZE}, \text{HSMOD}) = 1 - \frac{V_{\text{HSIZE}} + V_{\text{HEHT}} \left(1 - \frac{V_{\text{HSIZE}}}{14.4 \text{ V}}\right)}{14.4 \text{ V}}$$

$$h(I_{\text{HREF}}) = \frac{I_{\text{HREF}}}{I_{\text{HREF at } f = 70 \text{ kHz}}}$$

## I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

Via control bit FHMULT two different modes of operation can be chosen for the EW output waveform:

### 1. Mode 1

Horizontal size is controlled via register HSIZE and causes a DC shift at the EWDRV output. The complete waveform is also multiplied internally by a signal proportional to the line frequency [which is detected via the current at HREF (pin 28)]. This mode is to be used for driving EW diode modulator stages which require a voltage proportional to the line frequency.

### 2. Mode 2

The EW drive waveform does not track with the line frequency. This mode is to be used for driving EW modulators which require a voltage which is independent of the line frequency.

### Output stage for asymmetric correction waveforms [ASCOR (pin 20)]

This output is designed as a voltage output for superimposed waveforms of vertical parabola and sawtooth. Via the I<sup>2</sup>C-bus the registers HPARAL and HPINBAL allow to change amplitude and polarity of both signals.

**Application hint:** The TDA4841PS offers two possibilities to control HPINBAL and HPARAL.

#### 1. Control bit ACD = 1.

The two registers now control the horizontal phase by means of internal modulation of the PLL2 horizontal phase control. The ASCOR output (pin 20) can be left unused, but it will always provide an output signal because the ASCOR output stage is not influenced by the control bit ACD.

#### 2. Control bit ACD = 0.

The internal modulation via PLL2 is disconnected. In order to obtain the required effect on the screen, pin ASCOR must now be fed to the DC amplifier which controls the DC shift of the horizontal deflection. This option is useful for applications which already use a DC shift transformer.

If the tube does not need HPINBAL and HPARAL, then pin ASCOR can be used for other purposes, i.e. for a simple dynamic convergence.

### Dynamic focus section [FOCUS (pin 32)]

This section generates a complete drive signal for dynamic focus applications. The amplitude of the horizontal parabola is internally stabilized, thus it is independent of the horizontal frequency. The amplitude can be adjusted via register HFOCUS. Changing horizontal size may require a correction of HFOCUS. To compensate for the delay in external focus amplifiers a 'pre-correction' for the phase of the horizontal parabola has been implemented (see Fig.28). The amount of this pre-correction can be adjusted via register HFOCAD. The amplitude of the vertical parabola is independent of frequency and tracks with all vertical adjustments. The amplitude can be adjusted via register VFOCUS. FOCUS (pin 32) is designed as a voltage output for the superimposed vertical and horizontal parabolas.

### B+ control function block

The B+ control function block of the TDA4841PS consists of an Operational Transconductance Amplifier (OTA), a voltage comparator, a flip-flop and a discharge circuit (see Fig.25). This configuration allows easy applications for different B+ control concepts. See also Application Note AN96052: "B+ converter Topologies for Horizontal Deflection and EHT with TDA4855/58".

#### GENERAL DESCRIPTION

The non-inverting input of the OTA is connected internally to a high precision reference voltage. The inverting input is connected to BIN (pin 5). An internal clamping circuit limits the maximum positive output voltage of the OTA.

The output itself is connected to BOP (pin 3) and to the inverting input of the voltage comparator.

The non-inverting input of the voltage comparator can be accessed via BSENS (pin 4).

B+ drive pulses are generated by an internal flip-flop and fed to BDRV (pin 6) via an open-collector output stage. This flip-flop will be set at the rising edge of the signal at HDRV (pin 8). The falling edge of the output signal at BDRV has a defined delay of  $t_{d(BDRV)}$  to the rising edge of the HDRV pulse. When the voltage at BSENS exceeds the voltage at BOP, the voltage comparator output resets the flip-flop and, therefore, the open-collector stage at BDRV is floating again.

## I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

An internal discharge circuit allows a well defined discharge of capacitors at BSENS. BDRV is active at a LOW-level output voltage (see Figs 25 and 26), thus it requires an external inverting driver stage.

The B+ function block can be used for B+ deflection modulators in many different ways. Two popular application combinations are:

- Boost converter in feedback mode (see Fig.25)

In this application the OTA is used as an error amplifier with a limited output voltage range. The flip-flop will be set at the rising edge of the signal at HDRV. A reset will be generated when the voltage at BSENS, taken from the current sense resistor, exceeds the voltage at BOP.

If no reset is generated within a line period, the rising edge of the next HDRV pulse forces the flip-flop to reset. The flip-flop is set immediately after the voltage at BSENS has dropped below the threshold voltage  $V_{RESTART(BSENS)}$ .

- Buck converter in feed forward mode (see Fig.26)

This application uses an external RC combination at BSENS to provide a pulse width which is independent from the horizontal frequency. The capacitor is charged via an external resistor and discharged by the internal discharge circuit. For normal operation the discharge circuit is activated when the flip-flop is reset by the internal voltage comparator. The capacitor will now be discharged with a constant current until the internally controlled stop level  $V_{STOP(BSENS)}$  is reached. This level will be maintained until the rising edge of the next HDRV pulse sets the flip-flop again and disables the discharge circuit.

If no reset is generated within a line period, the rising edge of the next HDRV pulse automatically starts the discharge sequence and resets the flip-flop. When the voltage at BSENS reaches the threshold voltage  $V_{RESTART(BSENS)}$ , the discharge circuit will be disabled automatically and the flip-flop will be set immediately. This behaviour allows a definition of the maximum duty cycle of the B+ control drive pulse by the relationship of charge current to discharge current.

### Supply voltage stabilizer, references, start-up procedures and protection functions

The TDA4841PS provides an internal supply voltage stabilizer for excellent stabilization of all internal references. An internal gap reference, especially designed for low-noise, is the reference for the internal horizontal and vertical supply voltages. All internal reference currents and drive current for the vertical output stage are derived from this voltage via external resistors.

If either the supply voltage is below 8.3 V or no data from the I<sup>2</sup>C-bus has been received after power-up, the internal soft start and protection functions do not allow any of those outputs [HDRV, BDRV, VOUT1, VOUT2 and HUNLOCK (see Fig.22)] to be active.

For supply voltages below 8.3 V the internal I<sup>2</sup>C-bus will not generate an acknowledge and the IC is in standby mode. This is because the internal protection circuit has generated a reset signal for the soft start register SOFTST. Above 8.3 V data is accepted and all registers can be loaded. If the SOFTST register has received a set from the I<sup>2</sup>C-bus, the internal soft start procedure is released, which activates all outputs which are mentioned above.

If during normal operation the supply voltage has dropped below 8.1 V, the protection mode is activated and HUNLOCK (pin 17) changes to the protection status and is floating. This can be detected by the microprocessor.

This protection mode has been implemented in order to protect the deflection stages and the picture tube during start-up, shut-down and fault conditions. This protection mode can be activated as shown in Table 3.

## I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

**Table 3** Activation of protection mode

| ACTIVATION                                 | RESET  |
|--|--|
| Low supply voltage at pin 10               | increase supply voltage, reload registers, soft start via I <sup>2</sup> C-bus |
| Power dip, below 8.1 V                     | reload registers, soft start via I <sup>2</sup> C-bus or via supply voltage    |
| X-ray protection XRAY (pin 2) triggered    | reload registers, soft start via I <sup>2</sup> C-bus                          |
| HPLL2 (pin 30) externally pulled to ground | release pin 30   |

When the protection mode is active, several pins of the TDA4841PS are forced into a defined state:

- HDRV (horizontal driver output) is floating
- BDRV (B+ control driver output) is floating
- HUNLOCK (indicates, that the frequency-to-voltage converter is out of lock) is floating (HIGH via external pull-up resistor)
- CLBL provides a continuous blanking signal
- VOUT1 and VOUT2 (vertical outputs) are floating
- The capacitor at HPLL2 is discharged.

If the soft start procedure is activated via the I<sup>2</sup>C-bus, all of these actions will be performed in a well defined sequence (see Figs 22 and 23).

**Power dip recognition**

In standby mode the I<sup>2</sup>C-bus will only answer with an acknowledge when data is sent to the control register 1AH. This register contains the standby and soft start control bit.

If the I<sup>2</sup>C-bus master transmits data to another register, an acknowledge is given after the chip address and the subaddress; an acknowledge is not given after the data. This indicates that data can be stored into normal registers only in soft start mode.

If the supply voltage drops below 8.1 V the deflection controller leaves normal operation and changes to standby mode. The microcontroller can check this state by sending data into a register with the subaddress 0XH.

The acknowledge will only be given on the data if the IC is active.

Due to this behaviour the start-up of the TDA4841PS is defined as follows: the first data that is transferred to the deflection controller must be sent to the control register with subaddress 1AH. Any other subaddress will not lead to an acknowledge. This is a limitation in checking the I<sup>2</sup>C-busses of the monitor during start-up.

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

## LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134); all voltages measured with respect to ground.

| SYMBOL                | PARAMETER   | CONDITIONS | MIN.  | MAX.            | UNIT |
|-----------------------|---|------------|-------|-----------------|------|
| V <sub>CC</sub>       | supply voltage  |            | -0.5  | +13.2           | V    |
| V <sub>i(n)</sub>     | input voltage   |            |       |                 |      |
|                       | pin BIN   |            | -0.5  | +6.0            | V    |
|                       | pins HSYNC, VSYNC, VREF, HREF, VSMOD and HSMOD        |            | -0.5  | +6.5            | V    |
|                       | pins SDA, SCL and XRAY                                |            | -0.5  | +8.0            | V    |
| V <sub>o(n)</sub>     | output voltage  |            |       |                 |      |
|                       | pins VOUT2, VOUT1 and HUNLOCK                         |            | -0.5  | +6.5            | V    |
|                       | pins BDRV and HDRV                                    |            | -0.5  | +13.2           | V    |
| V <sub>I/O(n)</sub>   | input/output voltages at pins BOP and BSENS           |            | -0.5  | +6.0            | V    |
| I <sub>o(HDRV)</sub>  | horizontal driver output current                      |            | -     | 100             | mA   |
| I <sub>i(HFLB)</sub>  | horizontal flyback input current                      |            | -10   | +10             | mA   |
| I <sub>o(CLBL)</sub>  | video clamping pulse/vertical blanking output current |            | -     | -10             | mA   |
| I <sub>o(BOP)</sub>   | B+ control OTA output current                         |            | -     | 1               | mA   |
| I <sub>o(BDRV)</sub>  | B+ control driver output current                      |            | -     | 50              | mA   |
| I <sub>o(EWDRV)</sub> | EW driver output current                              |            | -     | -5              | mA   |
| V <sub>o(EWDRV)</sub> | maximum EW driver output voltage                      |            | -0.5  | V <sub>CC</sub> | V    |
| I <sub>o(FOCUS)</sub> | focus driver output current                           |            | -     | -5              | mA   |
| T <sub>amb</sub>      | ambient temperature                                   |            | -20   | +70             | °C   |
| T <sub>j</sub>        | junction temperature                                  |            | -     | 150             | °C   |
| T <sub>stg</sub>      | storage temperature                                   |            | -55   | +150            | °C   |
| V <sub>esd</sub>      | electrostatic discharge voltage for all pins          | note 1     | -150  | +150            | V    |
|                       |   | note 2     | -2000 | +2000           | V    |

## Notes

- Machine model: 200 pF; 0.75 μH; 10 Ω.
- Human body model: 100 pF; 7.5 μH; 1500 Ω.

## THERMAL CHARACTERISTICS

| SYMBOL               | PARAMETER                                   | CONDITIONS  | VALUE | UNIT |
|----------------------|---|-------------|-------|------|
| R <sub>th(j-a)</sub> | thermal resistance from junction to ambient | in free air | 55    | K/W  |

## QUALITY SPECIFICATION

In accordance with "URF-4-2-59/601"; EMC emission/immunity test in accordance with "DIS 1000 4.6" (IEC 801.6).

| SYMBOL           | PARAMETER     | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|------------------|---------------|------------|------|------|------|------|
| V <sub>EMC</sub> | emission test | note 1     | -    | 1.5  | -    | mV   |
|                  | immunity test | note 1     | -    | 2.0  | -    | V    |

## Note

- Tests are performed with application reference board. Tests with other boards will have different results.

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

## CHARACTERISTICS

$V_{CC} = 12\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; peripheral components in accordance with Fig.1; unless otherwise specified.

| SYMBOL   | PARAMETER   | CONDITIONS   | MIN. | TYP. | MAX.     | UNIT          |
|--|---|--|------|------|----------|---------------|
| <b>Horizontal sync separator</b>   |   |  |      |      |          |               |
| INPUT CHARACTERISTICS FOR DC-COUPLED TTL SIGNALS: PIN HSYNC                                |   |  |      |      |          |               |
| $V_{i(\text{HSYNC})}$  | sync input signal voltage                                   |  | 1.7  | –    | –        | V             |
| $V_{\text{HSYNC}(\text{sl})}$  | slicing voltage level                                       |  | 1.2  | 1.4  | 1.6      | V             |
| $t_{r(\text{HSYNC})}$  | rise time of sync pulse                                     |  | 10   | –    | 500      | ns            |
| $t_{f(\text{HSYNC})}$  | fall time of sync pulse                                     |  | 10   | –    | 500      | ns            |
| $t_{W(\text{HSYNC})(\text{min})}$  | minimum width of sync pulse                                 |  | 0.7  | –    | –        | $\mu\text{s}$ |
| $I_{i(\text{HSYNC})}$  | input current   | $V_{i(\text{HSYNC})} = 0.8\text{ V}$                                       | –    | –    | –200     | $\mu\text{A}$ |
|  |   | $V_{i(\text{HSYNC})} = 5.5\text{ V}$                                       | –    | –    | 10       | $\mu\text{A}$ |
| INPUT CHARACTERISTICS FOR AC-COUPLED VIDEO SIGNALS (SYNC-ON-VIDEO, NEGATIVE SYNC POLARITY) |   |  |      |      |          |               |
| $V_{\text{HSYNC}}$   | sync amplitude of video input signal voltage                | $R_{\text{source}} = 50\ \Omega$   | –    | 300  | –        | mV            |
| $V_{\text{HSYNC}(\text{AC},\text{sl})}$  | slicing voltage level (measured from top sync)              | $R_{\text{source}} = 50\ \Omega$   | 90   | 120  | 150      | mV            |
| $V_{\text{clamp}(\text{HSYNC})}$   | top sync clamping voltage level                             | $R_{\text{source}} = 50\ \Omega$   | 1.1  | 1.28 | 1.5      | V             |
| $I_{\text{ch}(\text{HSYNC})}$  | charge current for coupling capacitor                       | $V_{i(\text{HSYNC})} > V_{\text{clamp}(\text{HSYNC})}$                     | 1.7  | 2.4  | 3.4      | $\mu\text{A}$ |
| $t_{W(\text{HSYNC})(\text{min})}$  | minimum width of sync pulse                                 |  | 0.7  | –    | –        | $\mu\text{s}$ |
| $R_{\text{source}(\text{max})}$  | maximum source resistance                                   | duty cycle = 7%  | –    | –    | 1500     | $\Omega$      |
| $R_{i(\text{diff})(\text{HSYNC})}$   | differential input resistance                               | during sync  | –    | 80   | –        | $\Omega$      |
| <b>Automatic polarity correction for horizontal sync</b>                                   |   |  |      |      |          |               |
| $\frac{t_{P(\text{H})}}{t_{\text{H}}}$   | horizontal sync pulse width related to $t_{\text{H}}$       |  | –    | –    | 25       | %             |
| $t_{d(\text{HPOL})}$   | delay time for changing polarity                            |  | 0.3  | –    | 1.8      | ms            |
| <b>Vertical sync integrator</b>  |   |  |      |      |          |               |
| $t_{\text{int}(\text{V})}$   | integration time for generation of a vertical trigger pulse | $f_{\text{H}} = 15.625\text{ kHz}$ ;<br>$I_{\text{HREF}} = 0.52\text{ mA}$ | 14   | 20   | 26       | $\mu\text{s}$ |
|  |   | $f_{\text{H}} = 31.45\text{ kHz}$ ;<br>$I_{\text{HREF}} = 1.052\text{ mA}$ | 7    | 10   | 13       | $\mu\text{s}$ |
|  |   | $f_{\text{H}} = 64\text{ kHz}$ ;<br>$I_{\text{HREF}} = 2.141\text{ mA}$    | 3.9  | 5.7  | 6.5      | $\mu\text{s}$ |
|  |   | $f_{\text{H}} = 100\text{ kHz}$ ;<br>$I_{\text{HREF}} = 3.345\text{ mA}$   | 2.5  | 3.8  | 4.5      | $\mu\text{s}$ |
| <b>Vertical sync slicer (DC-coupled, TTL compatible): pin VSYNC</b>                        |   |  |      |      |          |               |
| $V_{i(\text{VSYNC})}$  | sync input signal voltage                                   |  | 1.7  | –    | –        | V             |
| $V_{\text{VSYNC}(\text{sl})}$  | slicing voltage level                                       |  | 1.2  | 1.4  | 1.6      | V             |
| $I_{i(\text{VSYNC})}$  | input current   | $0\text{ V} < V_{i(\text{VSYNC})} < 5.5\text{ V}$                          | –    | –    | $\pm 10$ | $\mu\text{A}$ |

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

| SYMBOL   | PARAMETER  | CONDITIONS  | MIN. | TYP. | MAX. | UNIT    |
|--|--|---|------|------|------|---------|
| <b>Automatic polarity correction for vertical sync</b>   |  |   |      |      |      |         |
| $t_{VSYNC(max)}$   | maximum width of vertical sync pulse   |   | –    | –    | 400  | $\mu$ s |
| $t_d(VPOL)$  | delay time for changing polarity   |   | 0.45 | –    | 1.8  | ms      |
| <b>Video clamping/vertical blanking output: pin CLBL</b> |  |   |      |      |      |         |
| $t_{clamp(CLBL)}$  | width of video clamping pulse  | measured at $V_{CLBL} = 3$ V                                  | 0.6  | 0.7  | 0.8  | $\mu$ s |
| $V_{clamp(CLBL)}$  | top voltage level of video clamping pulse  |   | 4.32 | 4.75 | 5.23 | V       |
| $TC_{clamp}$   | temperature coefficient of $V_{clamp(CLBL)}$                                     |   | –    | 4    | –    | mV/K    |
| $STPS_{clamp}$   | steepness of slopes for clamping pulse   | $R_L = 1$ M $\Omega$ ; $C_L = 20$ pF                          | –    | 50   | –    | ns/V    |
| $t_d(HSYNCt-CLBL)$                                       | delay between trailing edge of horizontal sync and start of video clamping pulse | clamping pulse triggered on trailing edge of horizontal sync; | –    | 130  | –    | ns      |
| $t_{clamp(max)}$   | maximum duration of video clamping pulse referenced to end of horizontal sync    | control bit CLAMP = 0; measured at $V_{CLBL} = 3$ V           | –    | –    | 1.0  | $\mu$ s |
| $t_d(HSYNCi-CLBL)$                                       | delay between leading edge of horizontal sync and start of video clamping pulse  | clamping pulse triggered on leading edge of horizontal sync;  | –    | 300  | –    | ns      |
| $t_{clamp(max)}$   | maximum duration of video clamping pulse referenced to end of horizontal sync    | control bit CLAMP = 1; measured at $V_{CLBL} = 3$ V           | –    | –    | 0.15 | $\mu$ s |
| $V_{blank(CLBL)}$  | top voltage level of vertical blanking pulse                                     | notes 1 and 2   | 1.7  | 1.9  | 2.1  | V       |
| $t_{blank(CLBL)}$  | width of vertical blanking pulse at pins CLBL and HUNLOCK                        | control bit VBLK = 0  | 220  | 260  | 300  | $\mu$ s |
|  |  | control bit VBLK = 1  | 305  | 350  | 395  | $\mu$ s |
| $TC_{blank}$   | temperature coefficient of $V_{blank(CLBL)}$                                     |   | –    | 2    | –    | mV/K    |
| $V_{scan(CLBL)}$   | output voltage during vertical scan  | $I_{CLBL} = 0$  | 0.59 | 0.63 | 0.67 | V       |
| $TC_{scan}$  | temperature coefficient of $V_{scan(CLBL)}$                                      |   | –    | –2   | –    | mV/K    |
| $I_{sink(CLBL)}$   | internal sink current  |   | 2.4  | –    | –    | mA      |
| $I_L(CLBL)$  | external load current  |   | –    | –    | –3.0 | mA      |



I<sup>2</sup>C-bus autosync deflection controller for  
PC monitors

TDA4841PS

| SYMBOL  | PARAMETER  | CONDITIONS   | MIN.   | TYP.      | MAX.      | UNIT                           |
|---|--|--|--------|-----------|-----------|--------------------------------|
| <b>Horizontal oscillator: pins HCAP and HREF</b>                            |  |  |        |           |           |                                |
| $f_{fr(H)}$   | free-running frequency without PLL1 action (for testing only)              | $R_{HBUF} = \infty$ ;<br>$R_{HREF} = 2.4 \text{ k}\Omega$ ;<br>$C_{HCAP} = 10 \text{ nF}$ ; note 3 | 30.53  | 31.45     | 32.39     | kHz                            |
| $\Delta f_{fr(H)}$  | spread of free-running frequency (excluding spread of external components) |  | –      | –         | $\pm 3.0$ | %                              |
| $TC_{fr}$   | temperature coefficient of free-running frequency                          |  | –100   | 0         | +100      | $10^{-6}/K$                    |
| $f_{H(max)}$  | maximum oscillator frequency   |  | –      | –         | 130       | kHz                            |
| $V_{HREF}$  | voltage at input for reference current                                     |  | 2.43   | 2.55      | 2.68      | V                              |
| <b>Unlock blanking detection: pin HUNLOCK</b>                               |  |  |        |           |           |                                |
| $V_{scan(HUNLOCK)}$   | low-level voltage of HUNLOCK   | saturation voltage in case of locked PLL1; internal sink current = 1 mA                            | –      | –         | 250       | mV                             |
| $V_{blank(HUNLOCK)}$  | blanking level of HUNLOCK  | $I_L = 0$  | 0.9    | 1         | 1.1       | V                              |
| $TC_{blank}$  | temperature coefficient of $V_{blank(HUNLOCK)}$                            |  | –      | –0.9      | –         | mV/K                           |
| $TC_{sink}$   | temperature coefficient of $I_{sink(HUNLOCK)}$                             |  | –      | 0.15      | –         | %/K                            |
| $I_{sink(int)}$   | internal sink current  | for blanking pulses; PLL1 locked   | 1.4    | 2.0       | 2.6       | mA                             |
| $I_{L(max)}$  | maximum external load current  | $V_{HUNLOCK} = 1 \text{ V}$  | –      | –         | –2        | mA                             |
| $I_{LI}$  | leakage current  | $V_{HUNLOCK} = 5 \text{ V}$ in case of unlocked PLL1 and/or protection active                      | –      | –         | $\pm 5$   | $\mu\text{A}$                  |
| <b>PLL1 phase comparator and frequency-locked loop: pins HPLL1 and HBUF</b> |  |  |        |           |           |                                |
| $t_{W(HSYNC)(max)}$   | maximum width of horizontal sync pulse (referenced to line period)         |  | –      | –         | 25        | %                              |
| $t_{lock(HPLL1)}$   | total lock-in time of PLL1   |  | –      | 40        | 80        | ms                             |
| $I_{ctrl(HPLL1)}$   | control currents   | notes 4 and 5<br>locked mode; level 1<br>locked mode; level 2                                      | –<br>– | 15<br>145 | –<br>–    | $\mu\text{A}$<br>$\mu\text{A}$ |
| $V_{HBUF}$  | buffered f/v voltage at HBUF (pin 27)                                      | minimum horizontal frequency   | –      | 2.55      | –         | V                              |
|   |  | maximum horizontal frequency   | –      | 0.5       | –         | V                              |

I<sup>2</sup>C-bus autosync deflection controller for  
PC monitors

TDA4841PS

| SYMBOL   | PARAMETER  | CONDITIONS   | MIN. | TYP. | MAX. | UNIT    |
|--|--|--|------|------|------|---------|
| <b>Phase adjustments and corrections via PLL1 and PLL2</b> |  |  |      |      |      |         |
| HPOS   | horizontal position (referenced to horizontal period)  | register HPOS = 0  | –    | –13  | –    | %       |
|  |  | register HPOS = 127  | –    | 0    | –    | %       |
|  |  | register HPOS = 255  | –    | 13   | –    | %       |
| HPINBAL  | horizontal pin unbalance correction via HPLL2 (referenced to horizontal period)                                      | register HPINBAL = 0; note 6                                 | –    | –1.2 | –    | %       |
|  |  | register HPINBAL = 63; note 6                                | –    | 1.2  | –    | %       |
|  |  | register HPINBAL = 32; note 6                                | –    | 0.02 | –    | %       |
| HPARAL   | horizontal parallelogram correction (referenced to horizontal period)  | register HPARAL = 0; note 6                                  | –    | –1.2 | –    | %       |
|  |  | register HPARAL = 63; note 6                                 | –    | 1.2  | –    | %       |
|  |  | register HPARAL = 32; note 6                                 | –    | 0.02 | –    | %       |
| HMOIRE   | relative modulation of horizontal position by 1/2 horizontal frequency; phase alternates with 1/2 vertical frequency | register HMOIRE = 0; control bit MOD = 0                     | –    | 0    | –    | %       |
|  |  | register HMOIRE = 63; control bit MOD = 0                    | –    | 0.02 | –    | %       |
|  | moire cancellation off   | control bit MOD = 1  | –    | 0    | –    | %       |
| <b>PLL2 phase detector: pins HFLB and HPLL2</b>            |  |  |      |      |      |         |
| $\Phi_{PLL2}$  | PLL2 control (advance of horizontal drive with respect to middle of horizontal flyback)                              | maximum advance; register HPINBAL = 32; register HPARAL = 32 | 36   | –    | –    | %       |
|  |  | minimum advance; register HPINBAL = 32; register HPARAL = 32 | –    | 7    | –    | %       |
| $I_{ctrl(PLL2)}$   | PLL2 control current   |  | –    | 75   | –    | $\mu A$ |
| $\Phi_{PLL2}$  | relative sensitivity of PLL2 phase shift related to horizontal period  |  | –    | 28   | –    | mV/%    |
| $V_{PROT(HPLL2)(max)}$                                     | maximum voltage for PLL2 protection mode/soft start  |  | –    | 4.6  | –    | V       |
| $I_{ch(PLL2)}$   | charge current for external capacitor during soft start  | $V_{HPLL2} < 3.7 V$  | –    | 1    | –    | $\mu A$ |
| $I_{dch(PLL2)}$  | discharge current for external capacitor during soft down  | $V_{HPLL2} < 3.7 V$  | –    | –1   | –    | $\mu A$ |

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

| SYMBOL   | PARAMETER   | CONDITIONS  | MIN.   | TYP.  | MAX. | UNIT             |
|--|---|---|--|-------|------|------------------|
| <b>HORIZONTAL FLYBACK INPUT: PIN HFLB</b>            |   |   |  |       |      |                  |
| $V_{\text{pos(HFLB)}}$                               | positive clamping level   | $I_{\text{i(HFLB)}} = 5 \text{ mA}$   | –  | 5.5   | –    | V                |
| $V_{\text{neg(HFLB)}}$                               | negative clamping level   | $I_{\text{i(HFLB)}} = -1 \text{ mA}$  | –  | -0.75 | –    | V                |
| $I_{\text{pos(HFLB)}}$                               | positive clamping current   |   | –  | –     | 6    | mA               |
| $I_{\text{neg(HFLB)}}$                               | negative clamping current   |   | –  | –     | -2   | mA               |
| $V_{\text{sl(HFLB)}}$                                | slicing level   |   | –  | 2.8   | –    | V                |
| <b>Output stage for line driver pulses: pin HDRV</b> |   |   |  |       |      |                  |
| OPEN-COLLECTOR OUTPUT STAGE                          |   |   |  |       |      |                  |
| $V_{\text{sat(HDRV)}}$                               | saturation voltage  | $I_{\text{o(HDRV)}} = 20 \text{ mA}$  | –  | –     | 0.3  | V                |
|  |   | $I_{\text{o(HDRV)}} = 60 \text{ mA}$  | –  | –     | 0.8  | V                |
| $I_{\text{LO(HDRV)}}$                                | output leakage current  | $V_{\text{HDRV}} = 16 \text{ V}$  | –  | –     | 10   | $\mu\text{A}$    |
| AUTOMATIC VARIATION OF DUTY CYCLE                    |   |   |  |       |      |                  |
| $t_{\text{HDRV(OFF)}/t_{\text{H}}}$                  | relative $t_{\text{OFF}}$ time of HDRV output; measured at $V_{\text{HDRV}} = 3 \text{ V}$ ; HDRV duty cycle is modulated by the relation $I_{\text{HREF}}/I_{\text{VREF}}$ | $I_{\text{o(HDRV)}} = 20 \text{ mA}$ ;<br>$f_{\text{H}} = 31.45 \text{ kHz}$ ; see Fig.16 | 42   | 45    | 48   | %                |
|  |   | $I_{\text{o(HDRV)}} = 20 \text{ mA}$ ;<br>$f_{\text{H}} = 58 \text{ kHz}$ ; see Fig.16    | 45.5   | 48.5  | 51.5 | %                |
|  |   | $I_{\text{o(HDRV)}} = 20 \text{ mA}$ ;<br>$f_{\text{H}} = 110 \text{ kHz}$ ; see Fig.16   | 49   | 52    | 55   | %                |
| <b>X-ray protection: pin XRAY</b>                    |   |   |  |       |      |                  |
| $V_{\text{XRAY(sl)}}$                                | slicing voltage level for latch   |   | 6.22   | 6.39  | 6.56 | V                |
| $t_{\text{W(XRAY)(min)}}$                            | minimum width of trigger pulse  |   | –  | –     | 30   | $\mu\text{s}$    |
| $R_{\text{i(XRAY)}}$                                 | input resistance at XRAY (pin 2)  | $V_{\text{XRAY}} < 6.38 \text{ V} + V_{\text{BE}}$  | 500  | –     | –    | $\text{k}\Omega$ |
|  |   | $V_{\text{XRAY}} > 6.38 \text{ V} + V_{\text{BE}}$  | –  | 5     | –    | $\text{k}\Omega$ |
|  |   | standby mode  | –  | 5     | –    | $\text{k}\Omega$ |
| $\text{XRAY}_{\text{rst}}$                           | reset of X-ray latch  | pin 9 open-circuit or connected to GND  | set control bit SOFTST via I <sup>2</sup> C-bus            |       |      |                  |
|  |   | pin 9 connected to $V_{\text{CC}}$ via $R_{\text{XSEL}}$                                  | switch off $V_{\text{CC}}$ , then re-apply $V_{\text{CC}}$ |       |      |                  |
| $V_{\text{CC(XRAY)(min)}}$                           | minimum supply voltage for correct function of the X-ray latch  | pin 9 connected to $V_{\text{CC}}$ via $R_{\text{XSEL}}$                                  | –  | –     | 4    | V                |
| $V_{\text{CC(XRAY)(max)}}$                           | maximum supply voltage for reset of the X-ray latch   | pin 9 connected to $V_{\text{CC}}$ via $R_{\text{XSEL}}$                                  | 2  | –     | –    | V                |
| $R_{\text{XSEL}}$                                    | external resistor at pin 9  | no reset via I <sup>2</sup> C-bus   | 56   | –     | 130  | $\text{k}\Omega$ |

I<sup>2</sup>C-bus autosync deflection controller for  
PC monitors

TDA4841PS

| SYMBOL   | PARAMETER   | CONDITIONS  | MIN.      | TYP.      | MAX.      | UNIT          |
|--|---|---|-----------|-----------|-----------|---------------|
| <b>Vertical oscillator (oscillator frequency in application without adjustment of free-running frequency <math>f_{fr(V)}</math>)</b> |   |   |           |           |           |               |
| $f_{fr(V)}$  | free-running frequency  | $R_{VREF} = 22\text{ k}\Omega$ ;<br>$C_{VCAP} = 100\text{ nF}$          | 40        | 42        | 43.3      | Hz            |
| $f_{cr(V)}$  | vertical frequency catching range   | constant amplitude; note 7  | 50        | –         | 160       | Hz            |
| $V_{VREF}$   | voltage at reference input for vertical oscillator  |   | –         | 3.0       | –         | V             |
| $t_{d(scan)}$  | delay between trigger pulse and start of ramp at VCAP (pin 24) (width of vertical blanking pulse) | control bit VBLK = 0  | 220       | 260       | 300       | $\mu\text{s}$ |
|  |   | control bit VBLK = 1  | 305       | 350       | 395       | $\mu\text{s}$ |
| $I_{VAGC}$   | amplitude control current   | control bit AGCDIS = 0  | $\pm 120$ | $\pm 200$ | $\pm 300$ | $\mu\text{A}$ |
|  |   | control bit AGCDIS = 1  | –         | 0         | –         | $\mu\text{A}$ |
| $C_{VAGC}$   | external capacitor at VAGC (pin 22)   |   | 150       | –         | 220       | nF            |
| <b>Differential vertical current outputs</b>   |   |   |           |           |           |               |
| ADJUSTMENT OF VERTICAL SIZE INCLUDING VGA AND EHT COMPENSATION; see Figs 3 to 7  |   |   |           |           |           |               |
| VGAIN  | vertical size without VGA overscan (referenced to nominal vertical size)                          | register VGAIN = 0;<br>register VSIZE = 127;<br>bit VOVSCN = 0; note 8  | –         | 70        | –         | %             |
|  |   | register VGAIN = 63;<br>register VSIZE = 127;<br>bit VOVSCN = 0; note 8 | –         | 100       | –         | %             |
| VSIZE  | vertical size without VGA overscan (referenced to nominal vertical size)                          | register VSIZE = 0;<br>register VGAIN = 63;<br>bit VOVSCN = 0; note 8   | –         | 60        | –         | %             |
|  |   | register VSIZE = 127;<br>register VGAIN = 63;<br>bit VOVSCN = 0; note 8 | –         | 100       | –         | %             |
| $VSIZE_{VGA}$  | vertical size with VGA overscan (referenced to nominal vertical size)                             | register VSIZE = 0;<br>register VGAIN = 63;<br>bit VOVSCN = 1; note 8   | –         | 70        | –         | %             |
|  |   | register VSIZE = 127;<br>register VGAIN = 63;<br>bit VOVSCN = 1; note 8 | 115.9     | 116.8     | 117.7     | %             |
| VSMOD  | EHT compensation on vertical size via VSMOD (pin 21) (referenced to 100% vertical size)           | $I_{i(VSMOD)} = 0$  | –         | 0         | –         | %             |
|  |   | $I_{i(VSMOD)} = -120\text{ }\mu\text{A}$                                | –         | -7        | –         | %             |
| $I_{i(VSMOD)}$   | input current (pin 21)  | VSMOD = 0   | –         | 0         | –         | $\mu\text{A}$ |
|  |   | VSMOD = -7%   | –         | -120      | –         | $\mu\text{A}$ |
| $R_{i(VSMOD)}$   | input resistance  |   | 300       | –         | 500       | $\Omega$      |
| $V_{ref(VSMOD)}$   | reference voltage at input  |   | –         | 5.0       | –         | V             |

I<sup>2</sup>C-bus autosync deflection controller for  
PC monitors

TDA4841PS

| SYMBOL   | PARAMETER   | CONDITIONS   | MIN.  | TYP.  | MAX.      | UNIT |
|--|---|--|-------|-------|-----------|------|
| $f_{ro(VSMOD)}$  | roll-off frequency (-3 dB)  | $I_{i(VSMOD)} = -60 \mu A + 15 \mu A$<br>(RMS)                       | 1     | –     | –         | MHz  |
| ADJUSTMENT OF VERTICAL POSITION; see Figs 3 to 7               |   |  |       |       |           |      |
| VOFFS  | vertical position (referenced to 100% vertical size)  | register VOFFS = 0   | –     | –4    | –         | %    |
|  |   | register VOFFS = 15  | –     | 4     | –         | %    |
|  |   | register VOFFS = 8   | –     | 0.25  | –         | %    |
| VPOS   | vertical position (referenced to 100% vertical size)  | register VPOS = 0  | –     | –11.5 | –         | %    |
|  |   | register VPOS = 127  | –     | 11.5  | –         | %    |
|  |   | register VPOS = 64   | –     | 0.09  | –         | %    |
| ADJUSTMENT OF VERTICAL LINEARITY; see Figs 6 and 27            |   |  |       |       |           |      |
| VLIN   | vertical linearity (S-correction)   | register VLIN = 0; control bit VSC = 0; note 8                       | –     | 2     | –         | %    |
|  |   | register VLIN = 15; control bit VSC = 0; note 8                      | –     | 46    | –         | %    |
|  |   | register VLIN = X; control bit VSC = 1; note 8                       | –     | 0     | –         | %    |
| $\delta VLIN$  | symmetry error of S-correction  | maximum VLIN   | –     | –     | $\pm 0.7$ | %    |
| ADJUSTMENT OF VERTICAL LINEARITY BALANCE; see Fig.7            |   |  |       |       |           |      |
| VLINBAL  | vertical linearity balance (referenced to 100% vertical size)   | register VLINBAL = 0; note 8   | –1.85 | –1.40 | –0.95     | %    |
|  |   | register VLINBAL = 15; note 8  | 0.95  | 1.40  | 1.85      | %    |
|  |   | register VLINBAL = 8; note 8   | –     | 0.08  | –         | %    |
| VMOIRE   | modulation of vertical picture position by $\frac{1}{2}$ vertical frequency (related to 100% vertical size) | register VMOIRE = 0; control bit MOD = 0                             | –     | 0     | –         | %    |
|  |   | register VMOIRE = 63; control bit MOD = 0                            | –     | 0.03  | –         | %    |
|  | moire cancellation off  | control bit MOD = 1  | –     | 0     | –         | %    |
| <b>Vertical output stage: pins VOUT1 and VOUT2; see Fig.27</b> |   |  |       |       |           |      |
| $\Delta I_{VOUT(nom)(p-p)}$                                    | nominal differential output current (peak-to-peak value)  | $\Delta I_{VOUT} = I_{VOUT1} - I_{VOUT2}$ ; nominal settings; note 8 | 0.76  | 0.85  | 0.94      | mA   |
| $I_{o(VOUT)(max)}$   | maximum output current at pins VOUT1 and VOUT2  | control bit VOVSCN = 1   | 0.54  | 0.6   | 0.66      | mA   |
| $V_{VOUT}$   | allowed voltage at outputs  |  | 0     | –     | 4.2       | V    |
| $E_{(offset)(max)(V)}$   | maximum offset error of vertical output currents  | nominal settings; note 8   | –     | –     | $\pm 2.5$ | %    |
| $LE_{V(max)}$  | maximum linearity error of vertical output currents   | nominal settings; note 8   | –     | –     | $\pm 1.5$ | %    |

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

| SYMBOL   | PARAMETER  | CONDITIONS   | MIN. | TYP.  | MAX. | UNIT                |
|--|--|--|------|-------|------|---------------------|
| <b>EW drive output</b>                             |  |  |      |       |      |                     |
| EW DRIVE OUTPUT STAGE: PIN EWDRV; see Figs 8 to 11 |  |  |      |       |      |                     |
| $V_{o(const)(EWDRV)}$                              | bottom output voltage at pin EWDRV (internally stabilized) | register HPIN = 0;<br>register HTRAP = 32;<br>register HSIZE = 255;<br>control bit VSC = 1 | 1.05 | 1.2   | 1.35 | V                   |
| $V_{o(EWDRV)(max)}$                                | maximum output voltage                                     | note 9   | 7.0  | –     | –    | V                   |
| $I_{L(EWDRV)}$                                     | load current   |  | –    | –     | ±2   | mA                  |
| $TC_{EWDRV}$                                       | temperature coefficient of output signal                   |  | –    | –     | 600  | 10 <sup>-6</sup> /K |
| $V_{HPIN(EWDRV)}$                                  | horizontal pincushion voltage                              | register HPIN = 0;<br>control bit VSC = 1; note 8  | –    | 0.04  | –    | V                   |
|  |  | register HPIN = 63;<br>control bit VSC = 1; note 8   | –    | 1.42  | –    | V                   |
| $V_{HCORT(EWDRV)}$                                 | horizontal corner correction voltage at top of picture     | register HCORT = 0;<br>control bit VSC = 0; note 8   | –    | 0.2   | –    | V                   |
|  |  | register HCORT = 63;<br>control bit VSC = 0; note 8  | –    | –0.64 | –    | V                   |
|  |  | register HCORT = X;<br>control bit VSC = 1; note 8   | –    | 0     | –    | V                   |
| $V_{HCORB(EWDRV)}$                                 | horizontal corner correction voltage at bottom of picture  | register HCORB = 0;<br>control bit VSC = 0; note 8   | –    | 0.2   | –    | V                   |
|  |  | register HCORB = 63;<br>control bit VSC = 0; note 8  | –    | –0.64 | –    | V                   |
|  |  | register HCORB = X;<br>control bit VSC = 1; note 8   | –    | 0     | –    | V                   |
| $V_{HTRAP(EWDRV)}$                                 | horizontal trapezium correction voltage                    | register HTRAP = 63;<br>note 8   | –    | –0.5  | –    | V                   |
|  |  | register HTRAP = 0; note 8   | –    | 0.5   | –    | V                   |
|  |  | register HTRAP = 32;<br>note 8   | –    | –0.01 | –    | V                   |
| $V_{HSIZE(EWDRV)}$                                 | horizontal size voltage                                    | register HSIZE = 255;<br>note 8  | –    | 0.13  | –    | V                   |
|  |  | register HSIZE = 0; note 8   | –    | 3.6   | –    | V                   |
| $V_{HEHT(EWDRV)}$                                  | EHT compensation on horizontal size via HSMOD (pin 31)     | $I_{i(HSMOD)} = 0$ ; note 8  | –    | 0.02  | –    | V                   |
|  |  | $I_{i(HSMOD)} = -120 \mu\text{A}$ ; note 8   | –    | 0.69  | –    | V                   |
| $I_{i(HSMOD)}$                                     | input current (pin 31)                                     | $V_{HEHT(EWDRV)} = 0.02 \text{ V}$   | –    | 0     | –    | $\mu\text{A}$       |
|  |  | $V_{HEHT(EWDRV)} = 0.69 \text{ V}$   | –    | –120  | –    | $\mu\text{A}$       |
| $R_{i(HSMOD)}$                                     | input resistance   |  | 300  | –     | 500  | $\Omega$            |
| $V_{ref(HSMOD)}$                                   | reference voltage at input                                 | $I_{i(HSMOD)} = 0$   | –    | 5.0   | –    | V                   |
| $f_{ro(HSMOD)}$                                    | roll-off frequency (–3 dB)                                 | $I_{i(HSMOD)} = -60 \mu\text{A}$<br>+ 15 $\mu\text{A}$ (RMS)                               | 1    | –     | –    | MHz                 |

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

| SYMBOL  | PARAMETER   | CONDITIONS  | MIN. | TYP.   | MAX. | UNIT          |
|---|---|---|------|--------|------|---------------|
| <b>TRACKING OF EWDRV OUTPUT SIGNAL WITH HORIZONTAL FREQUENCY PROPORTIONAL VOLTAGE</b> |   |   |      |        |      |               |
| $f_{H(MULTI)}$  | horizontal frequency range for tracking                   |   | 15   | –      | 80   | kHz           |
| $V_{PAR(EWDRV)}$  | parabola amplitude at EWDRV (pin 11)                      | $I_{HREF} = 1.052 \text{ mA};$<br>$f_H = 31.45 \text{ kHz};$ control bit<br>FHMULT = 1; note 10 | –    | 0.72   | –    | V             |
|   |   | $I_{HREF} = 2.341 \text{ mA};$<br>$f_H = 70 \text{ kHz};$ control bit<br>FHMULT = 1; note 10    | –    | 1.42   | –    | V             |
|   |   | function disabled; control<br>bit FHMULT = 0; note 10   | –    | 1.42   | –    | V             |
| $LE_{EWDRV}$  | linearity error of horizontal frequency tracking          |   | –    | –      | 8    | %             |
| <b>Output for asymmetric EW corrections: pin ASCOR; see Figs 12 and 13</b>            |   |   |      |        |      |               |
| $V_{HPARAL(ASCOR)}$   | vertical sawtooth voltage for EW parallelogram correction | register HPARAL = 0;<br>note 8  | –    | –0.825 | –    | V             |
|   |   | register HPARAL = 63;<br>note 8   | –    | 0.825  | –    | V             |
|   |   | register HPARAL = 32;<br>note 8   | –    | 0.05   | –    | V             |
| $V_{HPINBAL(ASCOR)}$  | vertical parabola for pin unbalance correction            | register HPINBAL = 0;<br>note 8   | –    | –1.0   | –    | V             |
|   |   | register HPINBAL = 63;<br>note 8  | –    | 1.0    | –    | V             |
|   |   | register HPINBAL = 32;<br>note 8  | –    | 0.05   | –    | V             |
| $V_{O(ASCOR)(max)(p-p)}$  | maximum output voltage swing (peak-to-peak value)         |   | –    | 4      | –    | V             |
| $V_{O(ASCOR)(max)}$   | maximum output voltage                                    |   | –    | 6.5    | –    | V             |
| $V_{C(ASCOR)}$  | centre voltage  |   | –    | 4.0    | –    | V             |
| $V_{O(ASCOR)(min)}$   | minimum output voltage                                    |   | –    | 1.9    | –    | V             |
| $I_{O(ASCOR)(max)}$   | maximum output current                                    | $V_{O(ASCOR)} \geq 1.9 \text{ V}$   | –    | –1.5   | –    | mA            |
| $I_{sink(ASCOR)(max)}$  | maximum output sink current                               | $V_{O(ASCOR)} \geq 1.9 \text{ V}$   | –    | 50     | –    | $\mu\text{A}$ |

I<sup>2</sup>C-bus autosync deflection controller for  
PC monitors

TDA4841PS

| SYMBOL  | PARAMETER   | CONDITIONS                         | MIN.      | TYP.      | MAX.    | UNIT          |
|---|---|------------------------------------|-----------|-----------|---------|---------------|
| <b>Focus section: pin FOCUS; see Figs 15 and 28</b> |   |                                    |           |           |         |               |
| $t_{\text{precor}}$                                 | pre-correction of phase for horizontal focus parabola       | register HFOCAD = 0                | –         | 300       | –       | ns            |
|   |   | register HFOCAD = 1                | –         | 350       | –       | ns            |
|   |   | register HFOCAD = 2                | –         | 400       | –       | ns            |
|   |   | register HFOCAD = 3                | –         | 450       | –       | ns            |
| $t_{W(\text{hfb})(\text{min})}$                     | minimum width of horizontal flyback pulse                   |                                    | 1.9       | –         | –       | $\mu\text{s}$ |
|   |   | operation without pre-correction   | –         | 7.5       | –       | $\mu\text{s}$ |
| $t_{W(\text{hfb})(\text{max})}$                     | maximum width of horizontal flyback pulse                   |                                    | –         | –         | 5.5     | $\mu\text{s}$ |
| $V_{\text{HFOCUS}(p-p)}$                            | amplitude of horizontal focus parabola (peak-to-peak value) | register HFOCUS = 0                | –         | 0.06      | –       | V             |
|   |   | register HFOCUS = 31               | –         | 3.3       | –       | V             |
| $V_{\text{VFOCUS}(p-p)}$                            | amplitude of vertical parabola (peak-to-peak value)         | register VFOCUS = 0; note 8        | –         | 0.02      | –       | V             |
|   |   | register VFOCUS = 15; note 8       | –         | 1.1       | –       | V             |
| $V_{o(\text{FOCUS})(\text{max})}$                   | maximum output voltage                                      | $I_{o(\text{FOCUS})} = 0$          | 6.15      | 6.4       | 6.65    | V             |
| $V_{o(\text{FOCUS})(\text{min})}$                   | minimum output voltage                                      | $I_{o(\text{FOCUS})} = 0$          | 1.0       | 1.3       | 1.6     | V             |
| $I_{o(\text{FOCUS})(\text{max})}$                   | maximum output current                                      |                                    | $\pm 1.5$ | –         | –       | mA            |
| $C_{L(\text{FOCUS})(\text{max})}$                   | maximum capacitive load                                     |                                    | –         | –         | 20      | pF            |
| <b>B+ control section; see Figs 25 and 26</b>       |   |                                    |           |           |         |               |
| TRANSCONDUCTANCE AMPLIFIER: PINS BIN AND BOP        |   |                                    |           |           |         |               |
| $V_{i(\text{BIN})}$                                 | input voltage   |                                    | 0         | –         | 5.25    | V             |
| $I_{i(\text{BIN})(\text{max})}$                     | maximum input current                                       |                                    | –         | –         | $\pm 1$ | $\mu\text{A}$ |
| $V_{\text{ref}(\text{int})}$                        | reference voltage at internal non-inverting input of OTA    |                                    | 2.37      | 2.5       | 2.58    | V             |
| $V_{o(\text{BOP})(\text{min})}$                     | minimum output voltage                                      |                                    | –         | –         | 0.5     | V             |
| $V_{o(\text{BOP})(\text{max})}$                     | maximum output voltage                                      | $I_{o(\text{BOP})} < 1 \text{ mA}$ | 5.0       | 5.3       | 5.6     | V             |
| $I_{o(\text{BOP})(\text{max})}$                     | maximum output current                                      |                                    | –         | $\pm 500$ | –       | $\mu\text{A}$ |
| $g_{m(\text{OTA})}$                                 | transconductance of OTA                                     | note 11                            | 30        | 50        | 70      | mS            |
| $G_{V(\text{ol})}$                                  | open-loop voltage gain                                      | note 12                            | –         | 86        | –       | dB            |
| $C_{\text{BOP}(\text{min})}$                        | minimum value of capacitor at BOP (pin 3)                   |                                    | 10        | –         | –       | nF            |



# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

| SYMBOL   | PARAMETER  | CONDITIONS   | MIN. | TYP. | MAX. | UNIT          |
|--|--|--|------|------|------|---------------|
| <b>VOLTAGE COMPARATOR: PIN BSENS</b>                                 |  |  |      |      |      |               |
| $V_{i(\text{BSENS})}$  | voltage range of positive comparator input   |  | 0    | –    | 5    | V             |
| $V_{i(\text{BOP})}$  | voltage range of negative comparator input   |  | 0    | –    | 5    | V             |
| $I_{\text{LI}(\text{BSENS})(\text{max})}$                            | maximum leakage current  | discharge disabled   | –    | –    | –2   | $\mu\text{A}$ |
| <b>OPEN-COLLECTOR OUTPUT STAGE: PIN BDRV</b>                         |  |  |      |      |      |               |
| $I_{\text{o}(\text{BDRV})(\text{max})}$                              | maximum output current   | note 13  | 20   | –    | –    | mA            |
| $I_{\text{LO}(\text{BDRV})}$   | output leakage current   | $V_{\text{BDRV}} = 16 \text{ V}$   | –    | –    | 3    | $\mu\text{A}$ |
| $V_{\text{sat}(\text{BDRV})}$  | saturation voltage   | $I_{\text{o}(\text{BDRV})} < 20 \text{ mA}$  | –    | –    | 300  | mV            |
| $t_{\text{off}(\text{BDRV})(\text{min})}$                            | minimum off-time   |  | –    | 250  | –    | ns            |
| $t_{\text{d}(\text{BDRV-HDRV})}$                                     | delay between BDRV pulse and HDRV pulse  | measured at $V_{\text{HDRV}} = V_{\text{BDRV}} = 3 \text{ V}$                                    | –    | 500  | –    | ns            |
| <b>BSENS DISCHARGE CIRCUIT: PIN BSENS</b>                            |  |  |      |      |      |               |
| $V_{\text{STOP}(\text{BSENS})}$                                      | discharge stop level   | capacitive load;<br>$I_{\text{BSENS}} = 0.5 \text{ mA}$  | 0.85 | 1.0  | 1.15 | V             |
| $I_{\text{dch}(\text{BSENS})}$                                       | discharge current  | $V_{\text{BSENS}} > 2.5 \text{ V}$   | 4.5  | 6.0  | 7.5  | mA            |
| $V_{\text{th}(\text{BSENS})(\text{restart})}$                        | threshold voltage for restart  | fault condition  | 1.2  | 1.3  | 1.4  | V             |
| $C_{\text{BSENS}(\text{min})}$                                       | minimum value of capacitor at BSENS (pin 4)  |  | 2    | –    | –    | nF            |
| <b>Internal reference, supply voltage, soft start and protection</b> |  |  |      |      |      |               |
| $V_{\text{CC}(\text{stab})}$   | external supply voltage for complete stabilization of all internal references                      |  | 9.2  | –    | 13.2 | V             |
| $I_{\text{CC}}$  | supply current   |  | –    | 68   | –    | mA            |
| $I_{\text{CC}(\text{stb})}$  | standby supply current   | STDBY = 1; $V_{\text{PLL2}} < 1 \text{ V}$ ;<br>$3.5 \text{ V} < V_{\text{CC}} < 13.2 \text{ V}$ | –    | 9    | –    | mA            |
| PSRR   | power supply rejection ratio of internal supply voltage  | $f = 1 \text{ kHz}$  | 50   | –    | –    | dB            |
| $V_{\text{CC}(\text{blank})}$  | supply voltage level for activation of continuous blanking   | $V_{\text{CC}}$ decreasing from 12 V   | 8.2  | 8.6  | 9.0  | V             |
| $V_{\text{CC}(\text{blank})(\text{min})}$                            | minimum supply voltage level for function of continuous blanking                                   | $V_{\text{CC}}$ decreasing from 12 V   | 2.5  | 3.5  | 4.0  | V             |
| $V_{\text{on}(V_{\text{CC}})}$                                       | supply voltage level for activation of HDRV, BDRV, VOUT1, VOUT2 and HUNLOCK                        | $V_{\text{CC}}$ increasing from below typical 8.1 V  | 7.9  | 8.3  | 8.7  | V             |
| $V_{\text{off}(V_{\text{CC}})}$                                      | supply voltage level for deactivation of BDRV, VOUT1, VOUT2 and HUNLOCK; also sets register SOFTST | $V_{\text{CC}}$ decreasing from above typical 8.3 V  | 7.7  | 8.1  | 8.5  | V             |

I<sup>2</sup>C-bus autosync deflection controller for  
PC monitors

TDA4841PS

| SYMBOL                                | PARAMETER  | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|---------------------------------------|--|------------|------|------|------|------|
| THRESHOLDS DERIVED FROM HPLL2 VOLTAGE |  |            |      |      |      |      |
| V <sub>HPLL2(blank)(ul)</sub>         | upper limit for continuous blanking  |            | –    | 4.6  | –    | V    |
| V <sub>HPLL2(bduty)(ul)</sub>         | upper limit for variation of BDRV duty cycle                                     |            | –    | 4.0  | –    | V    |
| V <sub>HPLL2(bduty)(ll)</sub>         | lower limit for variation of BDRV duty cycle                                     |            | –    | 3.2  | –    | V    |
| V <sub>HPLL2(hduty)(ul)</sub>         | upper limit for variation of HDRV duty cycle                                     |            | –    | 3.2  | –    | V    |
| V <sub>HPLL2(hduty)(ll)</sub>         | lower limit for variation of HDRV duty cycle                                     |            | –    | 1.8  | –    | V    |
| V <sub>HPLL2(stby)(ll)</sub>          | lower limit for VOUT1 and VOUT2 to be active via I <sup>2</sup> C-bus soft start |            | –    | 1.1  | –    | V    |
| V <sub>HPLL2(stby)(ul)</sub>          | upper limit for standby voltage  |            | –    | 1    | –    | V    |
| V <sub>HPLL2(stby)(ll)</sub>          | lower limit for VOUT1 and VOUT2 to be active via external DC current             |            | –    | 0    | –    | V    |

**Notes**

- For duration of vertical blanking pulse see "Vertical oscillator (oscillator frequency in application without adjustment of free-running frequency  $f_{fr(V)}$ )".
- Continuous blanking at CLBL (pin 16) will be activated, if one of the following conditions is true:
  - No horizontal flyback pulses at HFLB (pin 1) within a line
  - X-ray protection is triggered
  - Voltage at HPLL2 (pin 30) is low during soft start
  - Supply voltage at V<sub>CC</sub> (pin 10) is low
  - PLL1 unlocked while frequency-locked loop is in search mode.
- Oscillator frequency is  $f_{min}$  when no sync input signal is present (no continuous blanking at pins CLBL and HUNLOCK).
- Loading of HPLL1 (pin 26) is not allowed.
- Voltage at HPLL1 (pin 26) is fed to HBUF (pin 27) via a buffer. Disturbances caused by horizontal sync are removed by an internal sample-and-hold circuit.
- All vertical and EW adjustments according note 8, but VSIZE = 80% (register VSIZE = 63, VGAIN = 63 and control bit VOVSCN = 0).
- Value of resistor at VREF (pin 23) may not be changed.

---

**I<sup>2</sup>C-bus autosync deflection controller for  
PC monitors**

---





**TDA4841PS**

8. All vertical and EW adjustments are specified at nominal vertical settings; unless otherwise specified, which means:
  - a) VSIZE = 100% (register VSIZE = 127, VGAIN = 63 and control bit VOVSCN = 0)
  - b) VSMOD = 0 (no EHT compensation)
  - c) VPOS centred (register VPOS = 64)
  - d) VLIN = 0 (register VLIN = X and control bit VSC = 1)
  - e) VLINBAL = 0 (register VLINBAL = 8)
  - f) FHMULT = 0
  - g) HPARAL = 0 (register HPARAL = 32)
  - h) HPINBAL = 0 (register HPINBAL = 32)
  - i) Vertical oscillator synchronized.
9. The output signal at EWDRV (pin 11) may consist of horizontal pincushion + corner correction + DC shift + trapezium correction. If the VOVSCN control bit is set, and the VPOS adjustment is set to an extreme value, the tip of the parabola may be clipped at the upper limit of the EWDRV output voltage range. The waveform of corner correction will clip if the vertical sawtooth adjustment exceeds 110% of the nominal setting.
10. If  $f_H$  tracking is enabled, the amplitude of the complete EWDRV output signal (horizontal pincushion + corner correction + DC shift + trapezium) will be changed proportional to  $I_{HREF}$ . The EWDRV low level of 1.2 V remains fixed.
11. First pole of transconductance amplifier is 5 MHz without external capacitor (will become the second pole, if the OTA operates as an integrator).
12. Open-loop gain is  $\frac{V_{BOP}}{V_{BIN}}$  at  $f = 0$  with no resistive load and  $C_{BOP} = 10$  nF [from BOP (pin 3) to GND].
13. The recommended value for the pull-up resistor at BDRV (pin 6) is 1 k $\Omega$ .

I<sup>2</sup>C-bus autosync deflection controller for PC monitors





TDA4841PS

Vertical and EW adjustments

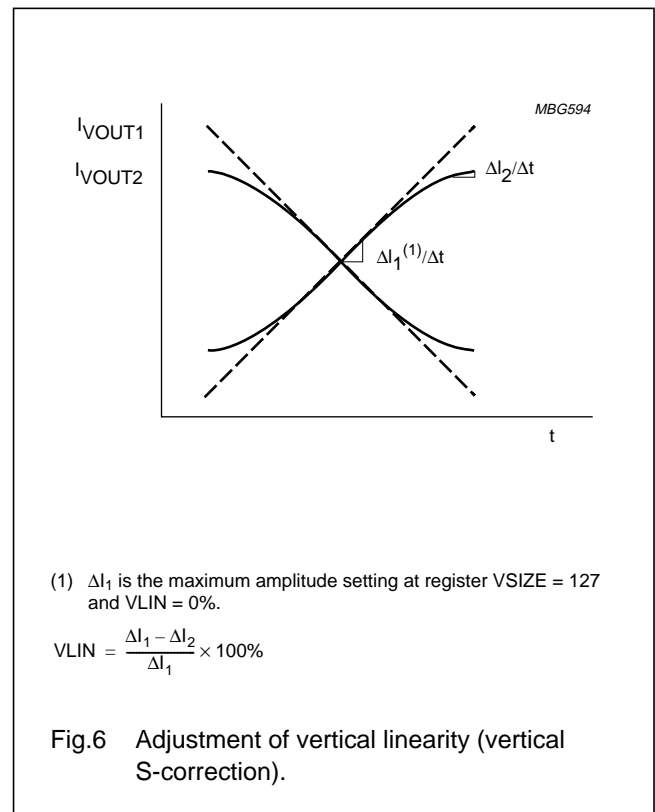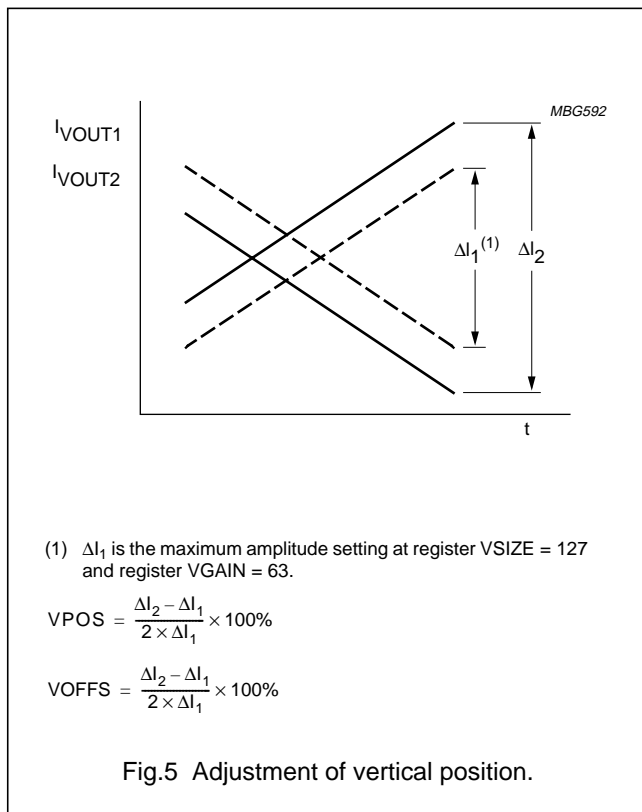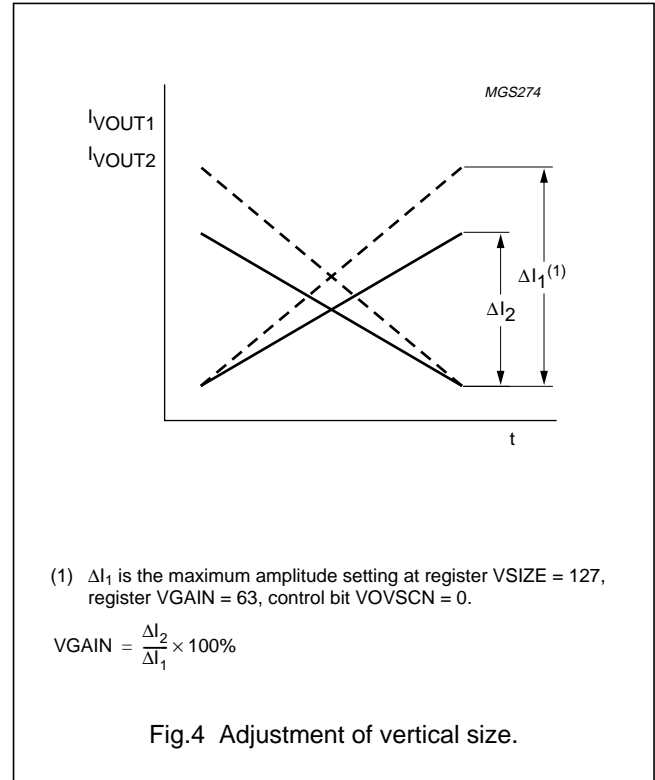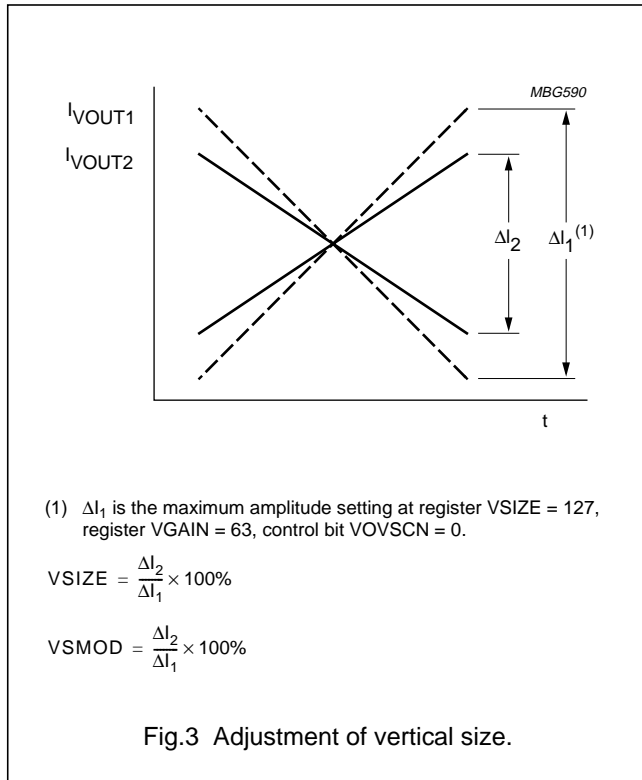




I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

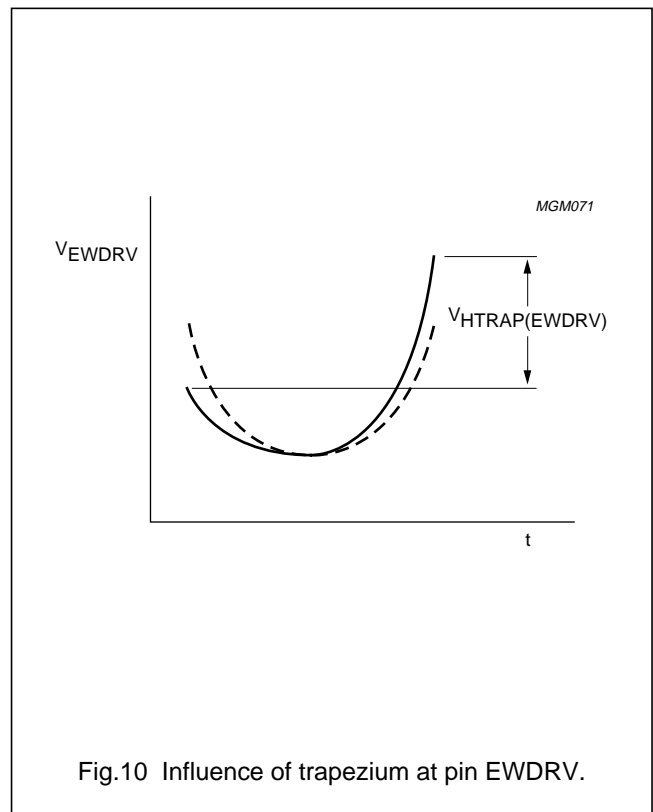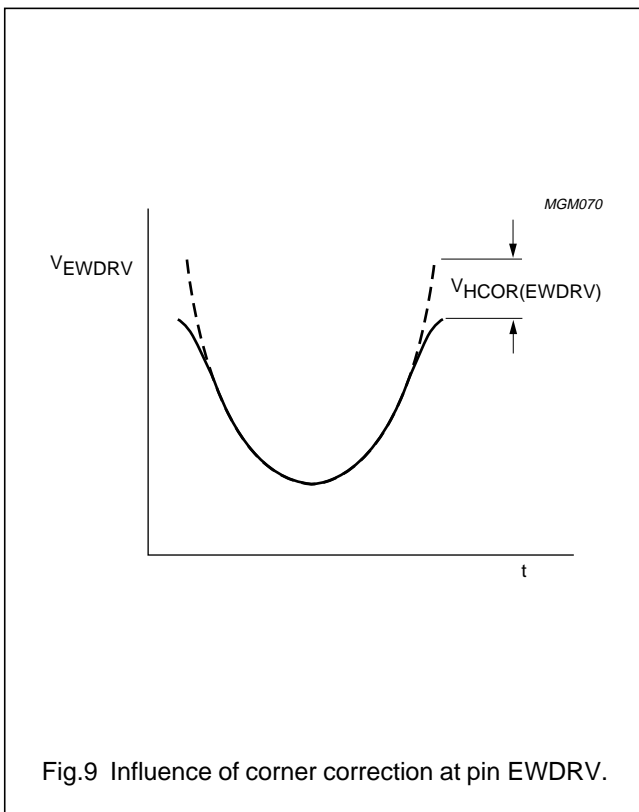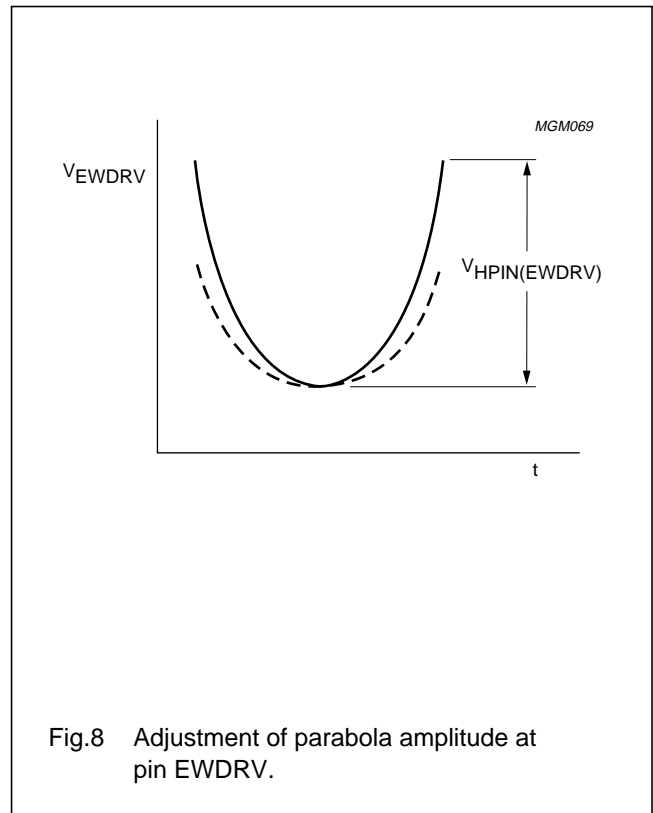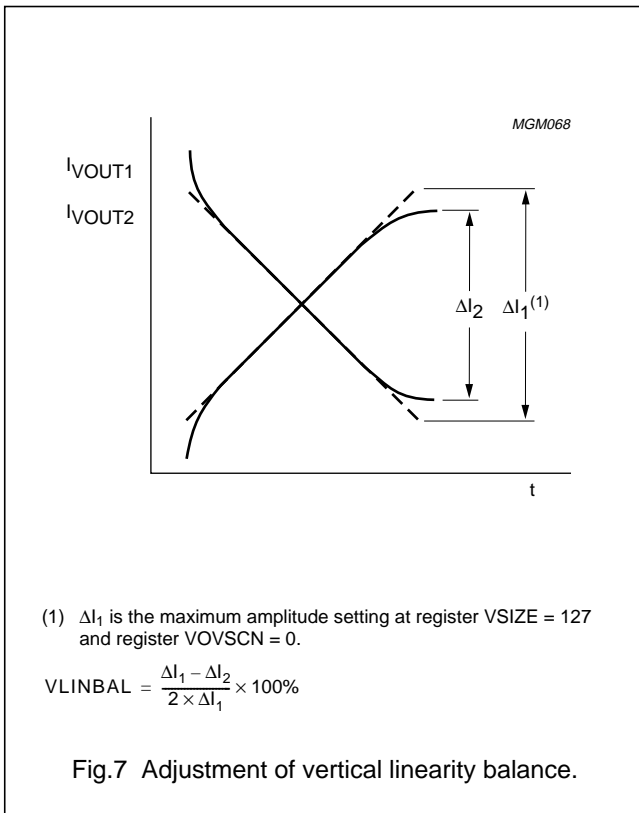

I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

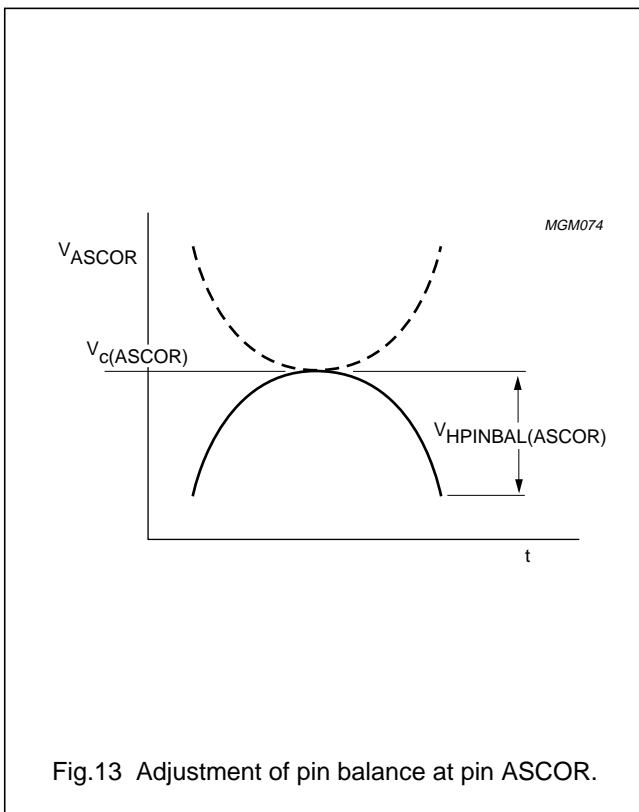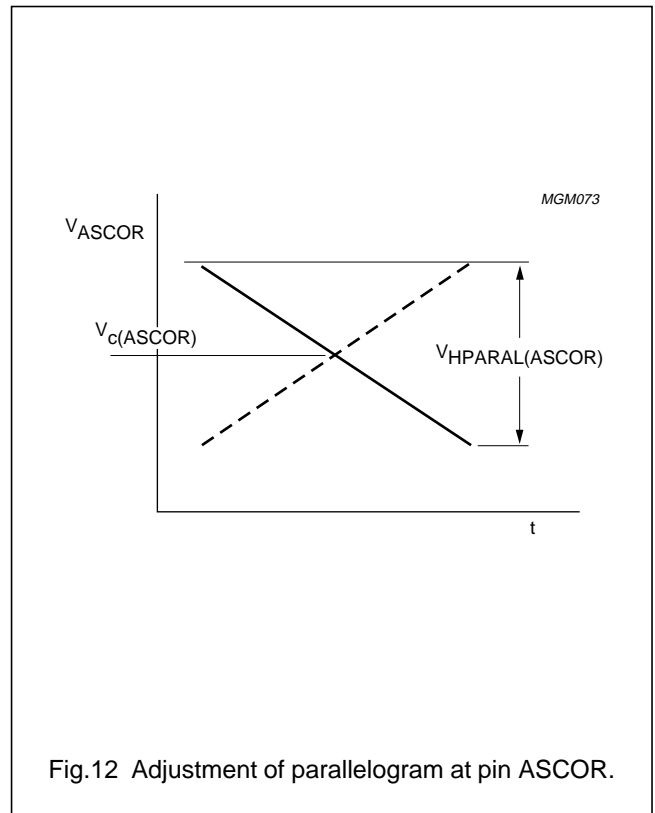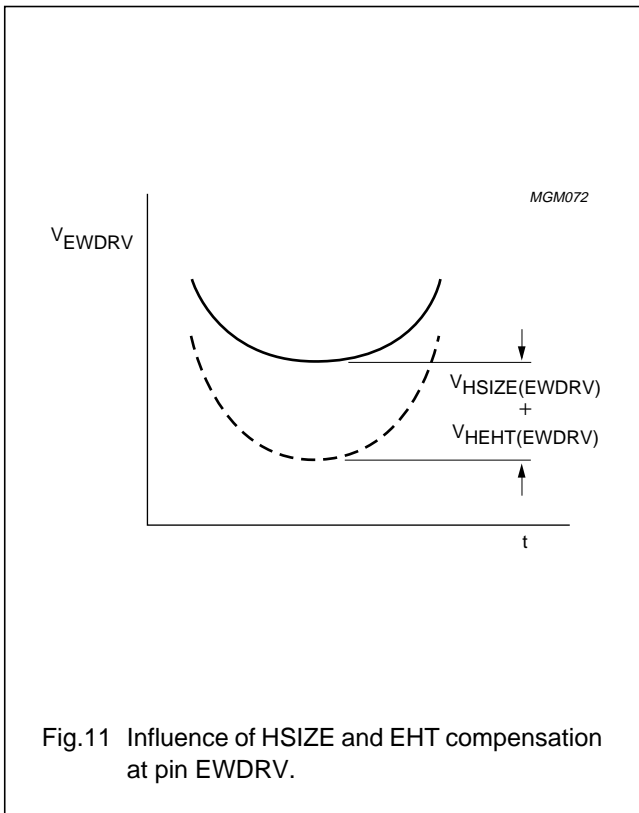

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

## Pulse diagrams

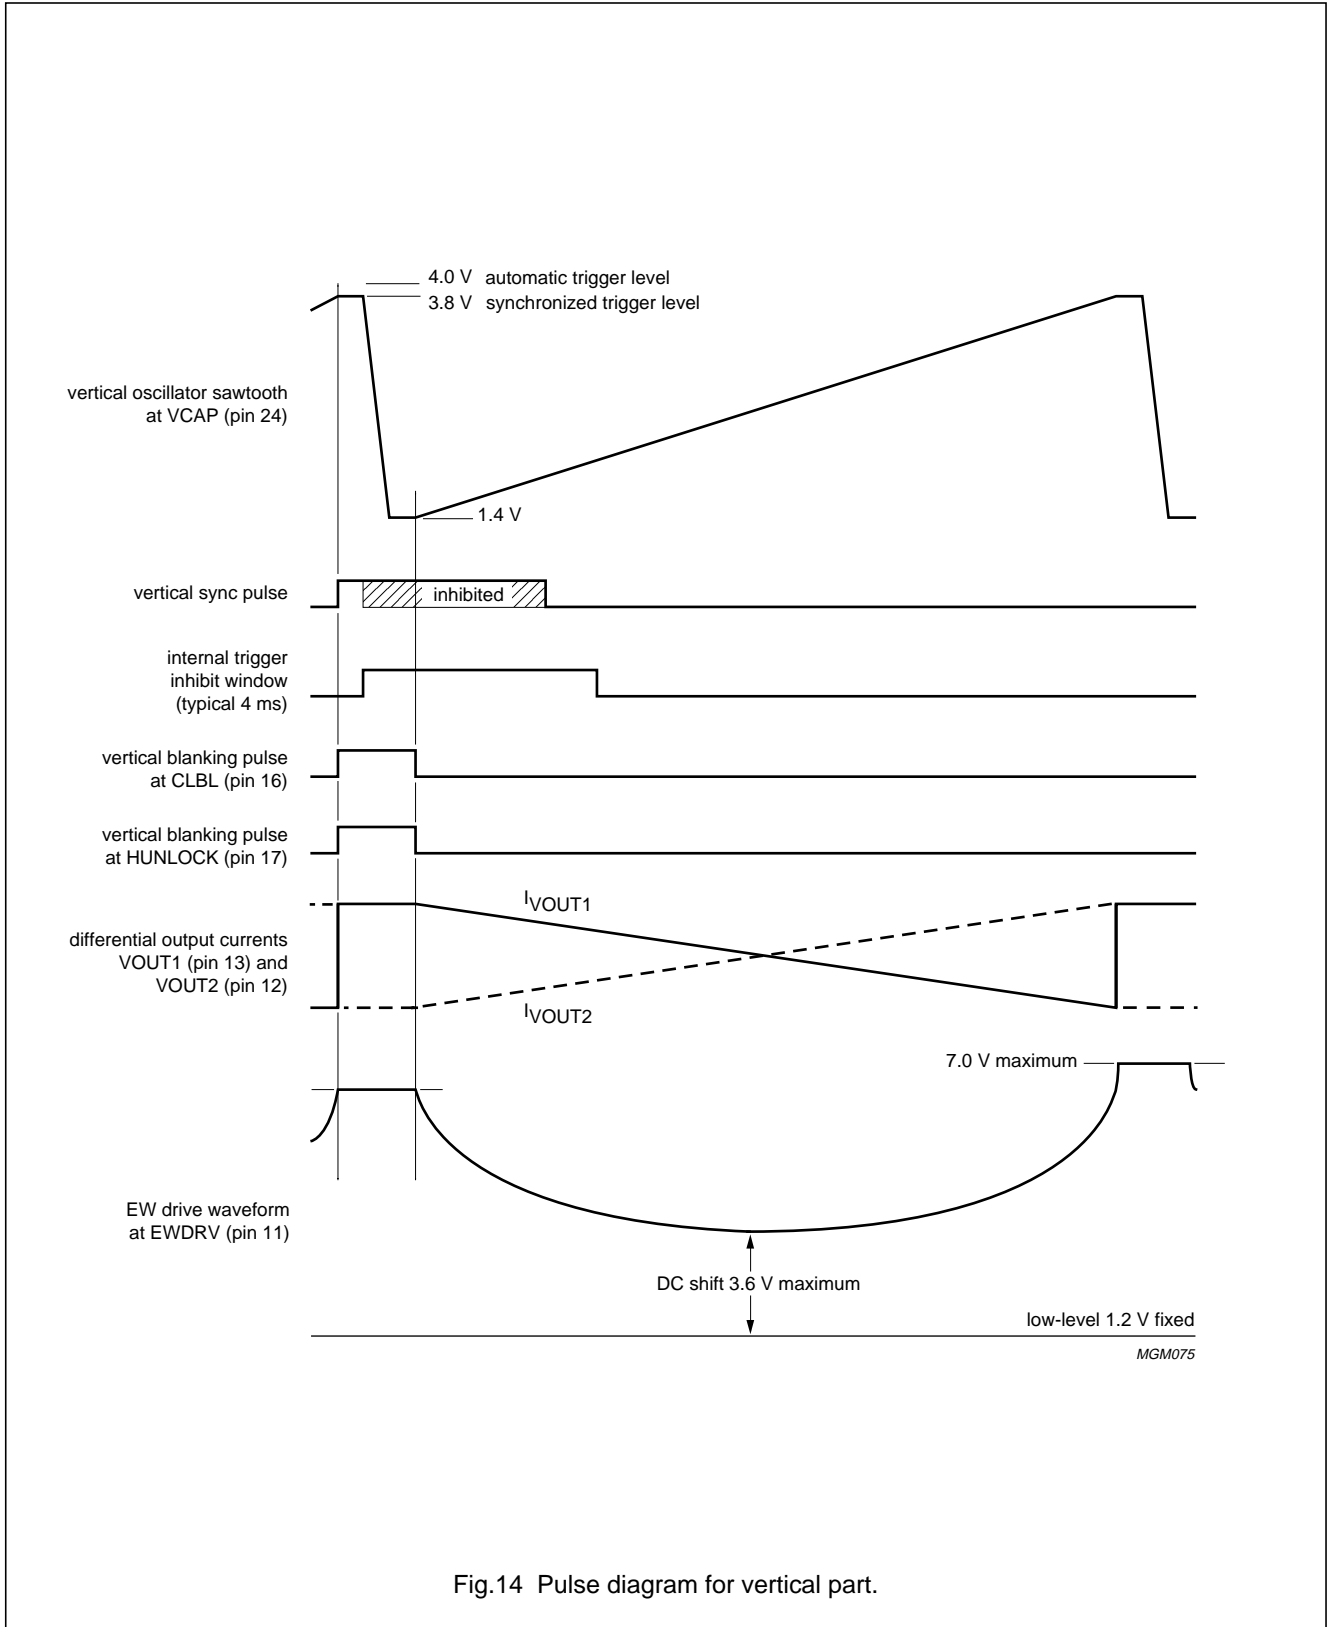


Fig.14 Pulse diagram for vertical part.

I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

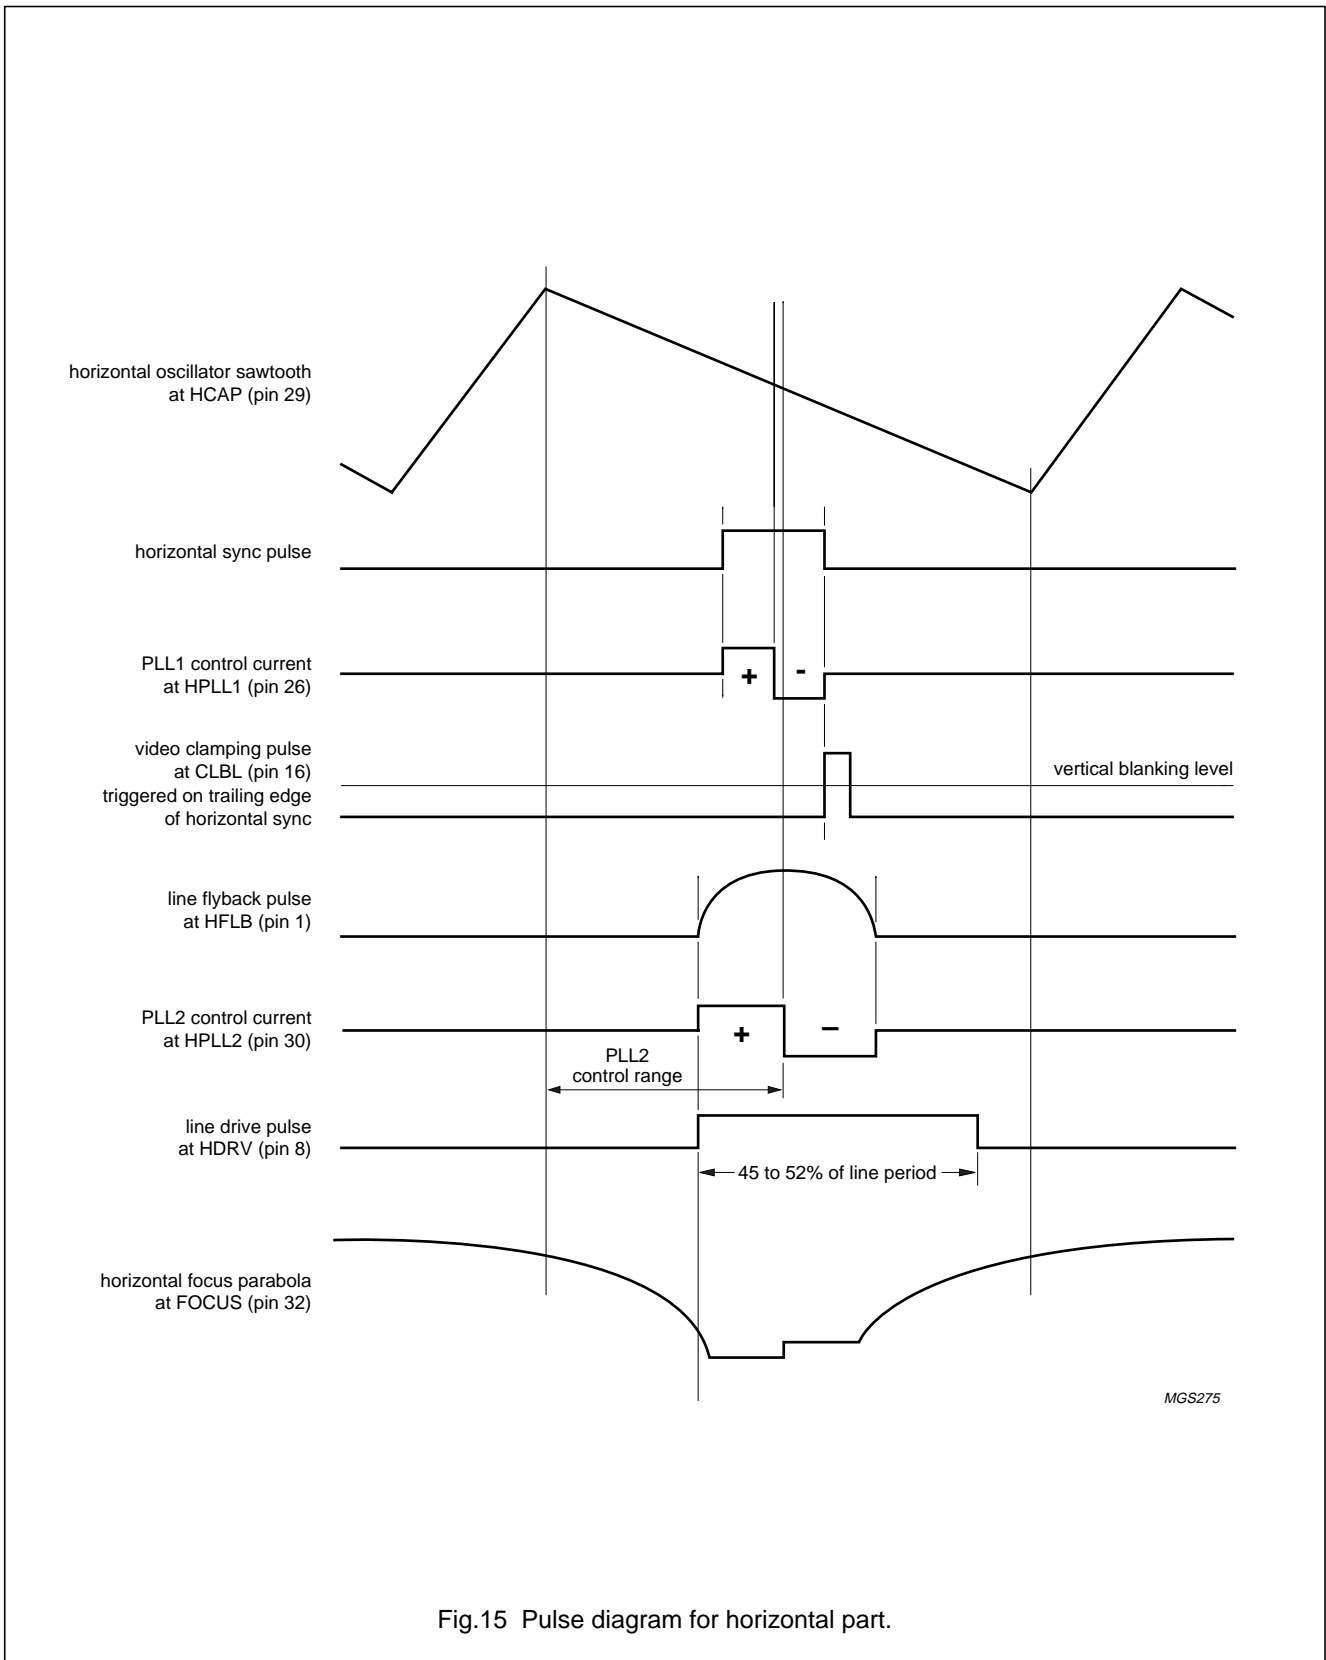


Fig.15 Pulse diagram for horizontal part.



I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS



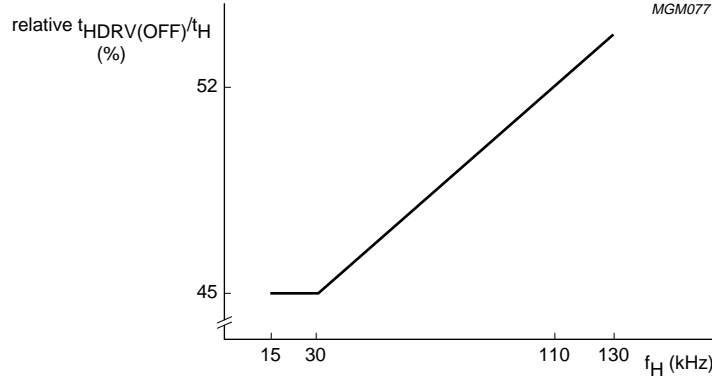


Fig.16 Relative t<sub>OFF</sub> time of HDRV as a function of horizontal frequency.

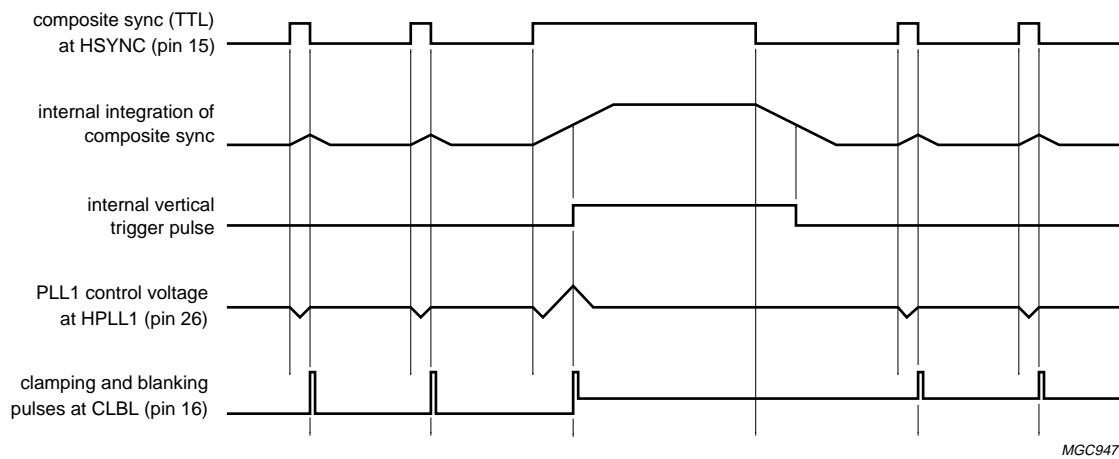

a. Reduced influence of vertical sync on horizontal phase.

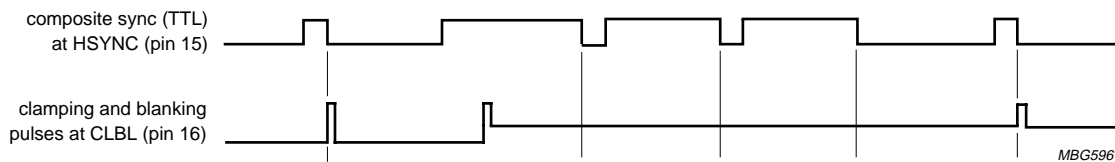

b. Generation of video clamping pulses during vertical sync with serration pulses.

Fig.17 Pulse diagrams for composite sync applications.

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

## I<sup>2</sup>C-BUS PROTOCOL

### Data format

The format of data for the I<sup>2</sup>C-bus is given in Table 4.

**Table 4** Data format

| S <sup>(1)</sup> | SLAVE ADDRESS <sup>(2)</sup> | A <sup>(3)</sup> | SUBADDRESS <sup>(4)</sup> | A <sup>(3)</sup> | DATA <sup>(5)</sup> | A <sup>(3)</sup> | P <sup>(6)</sup> |
|------------------|------------------------------|------------------|---------------------------|------------------|---------------------|------------------|------------------|
|------------------|------------------------------|------------------|---------------------------|------------------|---------------------|------------------|------------------|

### Notes

1. S = START condition.
2. SLAVE ADDRESS (MAD) = 1000 1100.
3. A = acknowledge, generated by the slave. No acknowledge is given, if the supply voltage is below 8.2 V for start-up and 8.0 V for shut-down procedure.
4. SUBADDRESS (SAD).
5. DATA byte. If more than 1 byte of DATA is transmitted, then **no** auto-increment of the significant subaddress is performed.
6. P = STOP condition.

It should be noted that clock pulses according to the 400 kHz specification are accepted for 3.3 V and 5 V applications (reference level = 1.8 V).

Default register values after power-up are random. All registers have to be preset via software before the soft start is enabled.

It should be noted that if register contents are changed during the vertical scan, this might result in a visible interference on the screen. The cause for this interference is the abrupt change of picture geometry which takes effect at random locations within the visible picture. To avoid this kind of interference, at least the adjustment of some critical geometry parameters should be synchronized with the vertical flyback. The TDA4841PS offers a feature to synchronize any I<sup>2</sup>C-bus adjustment with the internal vertical flyback pulse. For this purpose the IC offers two different modes for the handling of I<sup>2</sup>C-bus data:

- Direct mode
- Buffered mode.

### Direct mode

The direct mode is selected by setting the MSB of the I<sup>2</sup>C-bus register subaddress to logic 0.

Any I<sup>2</sup>C-bus command is executed immediately after it was received, so the adjustment takes effect immediately after the end of I<sup>2</sup>C-bus transmission.

This mode should be used if many register values have to be changed subsequently, i.e. during start-up, mode change, etc., and while there is no picture visible on the screen (blanked). The number of transmissions per V-period is not limited.

### Buffered mode

The buffered mode is selected by setting the MSB of the I<sup>2</sup>C-bus register subaddress to logic 1.

This mode is designed to avoid visible interferences on the screen during the I<sup>2</sup>C-bus adjustments. This mode should be used, if a single register has to be changed while the picture is visible, so i.e. for user adjustments.

One received I<sup>2</sup>C-bus data byte is stored in an internal 8-bit buffer before it is passed to the DAC section. The first internal vertical blanking pulse (VBL) after end of transmission is used to synchronize the adjustment change with the vertical flyback. So the actual change of the picture size, position, geometry, etc. will take place during the vertical flyback period, and will thus be invisible.

The IC gives acknowledge for chip address, subaddress and data of a buffered transmission. Only one I<sup>2</sup>C-bus transmission is accepted after each vertical blank. After one buffered transmission, the IC gives no acknowledge for further transmissions until next VBL pulse has occurred. The buffered mode is disabled while the IC is in standby mode.

## I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

### List of I<sup>2</sup>C-bus controlled switches

I<sup>2</sup>C-bus data can be transmitted in direct or buffered mode and is defined by the MSB of the register subaddress:

- SAD1 is the register subaddress to be used for transmissions in direct mode
- SAD2 is the register subaddress to be used for transmissions in buffered mode.

**Table 5** Controlled switches; notes 1 and 2

| CONTROL BIT           | FUNCTION  | SAD1 (HEX) | SAD2 (HEX) | REGISTER ASSIGNMENT |    |    |    |    |    |    |    |
|-----------------------|---|------------|------------|---------------------|----|----|----|----|----|----|----|
|                       |   |            |            | D7                  | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| BLKDIS                | 0: vertical, protection and horizontal unlock blanking available on pins CLBL and HUNLOCK | 0A         | 8A         | X                   | D6 | #  | #  | #  | #  | #  | #  |
|                       | 1: only vertical and protection blanking available on pins CLBL and HUNLOCK               |            |            |                     |    |    |    |    |    |    |    |
| AGCDIS                | 0: AGC in vertical oscillator active  | 0B         | 8B         | #                   | D6 | #  | #  | #  | #  | #  | #  |
|                       | 1: AGC in vertical oscillator inhibited   |            |            |                     |    |    |    |    |    |    |    |
| FHMULT                | 0: EW output independent of horizontal frequency  | 0B         | 8B         | D7                  | #  | #  | #  | #  | #  | #  | #  |
|                       | 1: EW output tracks with horizontal frequency   |            |            |                     |    |    |    |    |    |    |    |
| VSC                   | 0: VLIN, HCORT and HCORB adjustments enabled  | 02         | 82         | X                   | D6 | #  | #  | #  | #  | #  | #  |
|                       | 1: VLIN, HCORT and HCORB adjustments forced to centre value                               |            |            |                     |    |    |    |    |    |    |    |
| MOD                   | 0: horizontal and vertical moire cancellation enabled                                     | 08         | 88         | D7                  | #  | #  | #  | #  | #  | #  | #  |
|                       | 1: horizontal and vertical moire cancellation disabled                                    |            |            |                     |    |    |    |    |    |    |    |
| VOVSCN                | 0: vertical size 100%   | 0F         | 8F         | X                   | D6 | #  | #  | #  | #  | #  | #  |
|                       | 1: vertical size 116.8% for VGA350  |            |            |                     |    |    |    |    |    |    |    |
| CLAMP                 | 0: trailing edge for horizontal clamp   | 09         | 89         | #                   | D6 | #  | #  | #  | #  | #  | #  |
|                       | 1: leading edge for horizontal clamp  |            |            |                     |    |    |    |    |    |    |    |
| VBLK                  | 0: vertical blanking = 260 $\mu$ s  | 09         | 89         | D7                  | #  | #  | #  | #  | #  | #  | #  |
|                       | 1: vertical blanking = 340 $\mu$ s  |            |            |                     |    |    |    |    |    |    |    |
| ACD                   | 0: ASCOR disconnected from PLL2   | 04         | 84         | X                   | D6 | #  | #  | #  | #  | #  | #  |
|                       | 1: ASCOR internally connected with PLL2   |            |            |                     |    |    |    |    |    |    |    |
| STDBY <sup>(3)</sup>  | 0: internal power supply enabled  | 1A         | 9A         | #                   | X  | X  | X  | X  | X  | #  | D0 |
|                       | 1: internal power supply disabled   |            |            |                     |    |    |    |    |    |    |    |
| SOFTST <sup>(3)</sup> | 0: soft start not released (pin HPLL2 pulled to ground)                                   | 1A         | 9A         | #                   | X  | X  | X  | X  | X  | D1 | #  |
|                       | 1: soft start is released (power-up via pin HPLL2)  |            |            |                     |    |    |    |    |    |    |    |

### Notes

1. X = don't care.
2. # = this bit is occupied by another function. If the register is addressed, the bit values for both functions must be transferred.
3. Bits STDBY and SOFTST can be reset by the internal protection circuit.

I<sup>2</sup>C-bus autotsync deflection controller for  
PC monitors

TDA4841PS

List of I<sup>2</sup>C-bus controlled functions

I<sup>2</sup>C-bus data can be transmitted in direct or buffered mode and is defined by the MSB of the register subaddress:

- SAD1 is the register subaddress to be used for transmissions in direct mode
- SAD2 is the register subaddress to be used for transmissions in buffered mode.

Table 6 Controlled functions; notes 1 and 2

| FUNCTION  | NAME    | BITS | SAD1<br>(HEX) | SAD2<br>(HEX) | REGISTER ASSIGNMENT |    |    |    |    |    |    |    | CTRL<br>BIT | RANGE                                | FUNCTION<br>TRACKS WITH                    |
|---|---------|------|---------------|---------------|---------------------|----|----|----|----|----|----|----|-------------|--------------------------------------|--|
|   |         |      |               |               | D7                  | D6 | D5 | D4 | D3 | D2 | D1 | D0 |             |                                      |  |
| Horizontal size   | HSIZE   | 8    | 01            | 81            | D7                  | D6 | D5 | D4 | D3 | D2 | D1 | D0 | –           | 0.1 to 3.6 V                         | –  |
| Horizontal position                                     | HPOS    | 8    | 07            | 87            | D7                  | D6 | D5 | D4 | D3 | D2 | D1 | D0 | –           | ±13% of horizontal<br>period         | –  |
| Horizontal pincushion                                   | HPIN    | 6    | 0F            | 8F            | X                   | #  | D5 | D4 | D3 | D2 | D1 | D0 | –           | 0 to 1.42 V                          | VSIZE, VOVSCN,<br>VPOS, HSIZE and<br>HSMOD |
| Horizontal trapezium<br>correction                      | HTRAP   | 6    | 03            | 83            | X                   | X  | D5 | D4 | D3 | D2 | D1 | D0 | –           | ±500 mV (p-p)                        | VSIZE, VOVSCN,<br>VPOS, HSIZE and<br>HSMOD |
| Horizontal corner<br>correction at top of<br>picture    | HCORT   | 6    | 04            | 84            | X                   | #  | D5 | D4 | D3 | D2 | D1 | D0 | VSC         | +15 to –46% of<br>parabola amplitude | VSIZE, VOVSCN,<br>VPOS, HSIZE and<br>HSMOD |
| Horizontal corner<br>correction at bottom<br>of picture | HCORB   | 6    | 02            | 82            | X                   | #  | D5 | D4 | D3 | D2 | D1 | D0 | VSC         | +15 to –46% of<br>parabola amplitude | VSIZE, VOVSCN,<br>VPOS, HSIZE and<br>HSMOD |
| Horizontal<br>parallelogram                             | HPARAL  | 6    | 09            | 89            | #                   | #  | D5 | D4 | D3 | D2 | D1 | D0 | ACD         | ±1.2% of horizontal<br>period        | VSIZE, VOVSCN<br>and VPOS                  |
| EW pin balance  | HPINBAL | 6    | 0B            | 8B            | #                   | #  | D5 | D4 | D3 | D2 | D1 | D0 | ACD         | ±1.2% of horizontal<br>period        | VSIZE, VOVSCN<br>and VPOS                  |
| Vertical size   | VSIZE   | 7    | 08            | 88            | #                   | D6 | D5 | D4 | D3 | D2 | D1 | D0 | –           | 60 to 100%                           | VSMOD                                      |
| Vertical position                                       | VPOS    | 7    | 0D            | 8D            | X                   | D6 | D5 | D4 | D3 | D2 | D1 | D0 | –           | ±11.5%                               | VSMOD                                      |
| Vertical gain   | VGAIN   | 6    | 0A            | 8A            | X                   | #  | D5 | D4 | D3 | D2 | D1 | D0 | –           | 70 to 100%                           | –  |
| Vertical offset   | VOFFS   | 4    | 0E            | 8E            | #                   | #  | #  | #  | D3 | D2 | D1 | D0 | –           | ±4%                                  | –  |
| Vertical linearity                                      | VLIN    | 4    | 05            | 85            | D7                  | D6 | D5 | D4 | #  | #  | #  | #  | VSC         | –2 to –46%                           | VSIZE, VOVSCN,<br>VPOS and VSMOD           |
| Vertical linearity<br>balance                           | VLINBAL | 4    | 05            | 85            | #                   | #  | #  | #  | D3 | D2 | D1 | D0 | –           | ±1.4% of 100%<br>vertical size       | VSIZE, VOVSCN,<br>VPOS and VSMOD           |

## I<sup>2</sup>C-bus autotsync deflection controller for PC monitors

TDA4841PS


| FUNCTION                                   | NAME   | BITS | SAD1<br>(HEX) | SAD2<br>(HEX) | REGISTER ASSIGNMENT |    |    |    |    |    |    |    | CTRL<br>BIT | RANGE                            | FUNCTION<br>TRACKS WITH |
|--|--------|------|---------------|---------------|---------------------|----|----|----|----|----|----|----|-------------|----------------------------------|-------------------------|
|  |        |      |               |               | D7                  | D6 | D5 | D4 | D3 | D2 | D1 | D0 |             |                                  |                         |
| Moire cancellation via vertical position   | VMOIRE | 6    | 00            | 80            | X                   | X  | D5 | D4 | D3 | D2 | D1 | D0 | MOD         | 0 to 0.08% of vertical amplitude | –                       |
| Moire cancellation via horizontal position | HMOIRE | 6    | 06            | 86            | X                   | X  | D5 | D4 | D3 | D2 | D1 | D0 | MOD         | 0.07% of horizontal period       | –                       |
| Vertical focus                             | VFOCUS | 4    | 0E            | 8E            | D7                  | D6 | D5 | D4 | #  | #  | #  | #  | –           | 0 to 1.1 V                       | VSIZE, VOVSCN and VPOS  |
| Horizontal focus                           | HFOCUS | 5    | 0C            | 8C            | #                   | #  | X  | D4 | D3 | D2 | D1 | D0 | –           | 0 to 3.3 V                       | –                       |
| Horizontal focus pre-correction            | HFOCAD | 2    | 0C            | 8C            | D7                  | D6 | X  | #  | #  | #  | #  | #  | –           | 300 to 450 ns                    | –                       |

### Notes

1. X = don't care.
2. # = this bit is occupied by another function. If the register is addressed, the bit values for both functions must be transferred.

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

## TDA4841PS

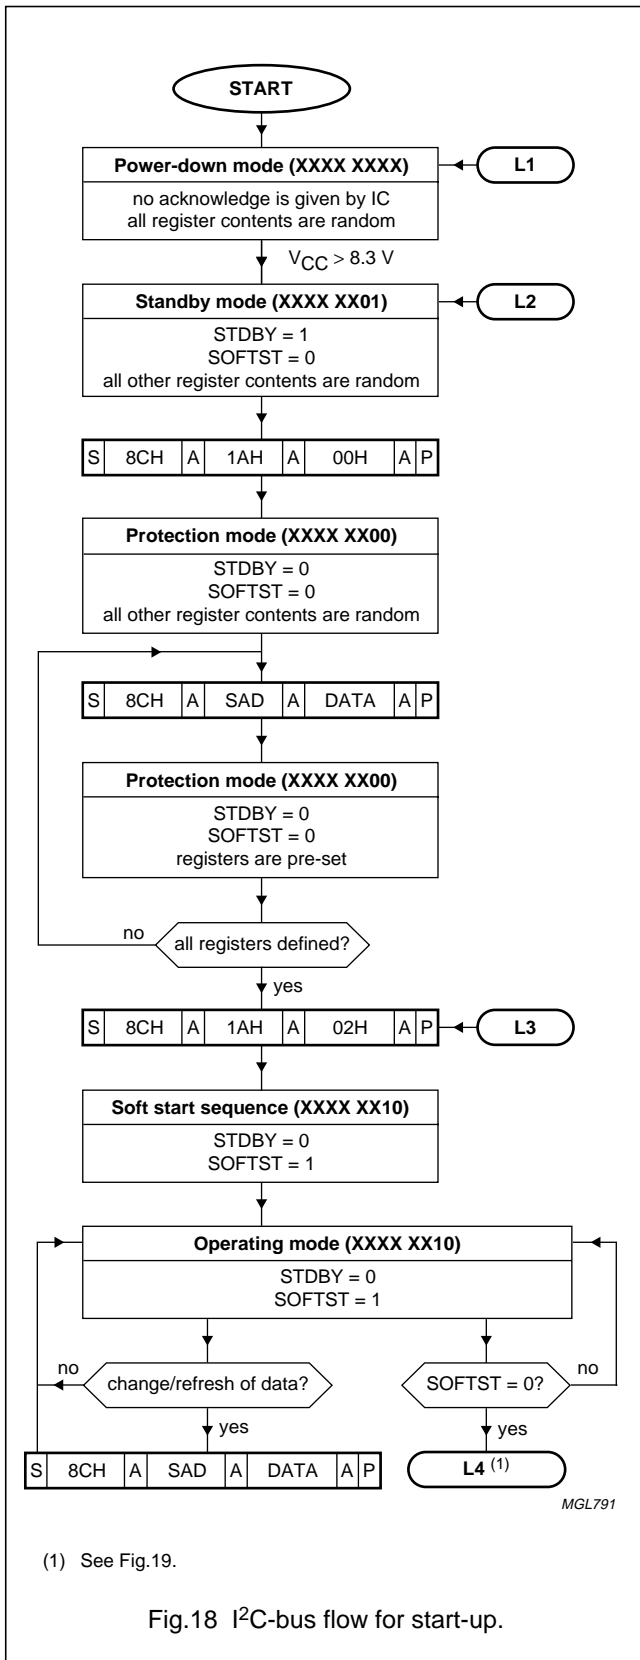

### Start-up procedure

V<sub>CC</sub> < 8.3 V:

- As long as the supply voltage is too low for correct operation, the IC will give no acknowledge due to internal Power-On Reset (POR)
- Supply current is 9 mA or less.

V<sub>CC</sub> > 8.3 V:

- Internal POR has ended and the IC is in standby mode
- Control bits STDBY and SOFTST are reset to their start values
- All other register contents are random
- Pin HUNLOCK is at HIGH-level.

Setting control bit STDBY = 0:

- Enables internal power supply
- Supply current increases from 9 to 68 mA
- When V<sub>CC</sub> < 8.6 V register SOFTST cannot be set by the I<sup>2</sup>C-bus
- Output stages are disabled
- Pin HUNLOCK is at HIGH-level.

Setting all registers to defined values:

- Due to the hardware configuration of the IC (no auto-increment) any register setting needs a complete 3-byte I<sup>2</sup>C-bus data transfer as follows: START - IC address - subaddress - data - STOP.

Setting control bit SOFTST = 1:

- Before enabling the soft start sequence a delay of minimum 80 ms is necessary to obtain correct function of the horizontal drive
- HDRV duty cycle increases
- BDRV duty cycle increases
- VOUT1 and VOUT2 are enabled
- PLL1 and PLL2 are enabled.

IC in full operation:


- Pin HUNLOCK is at LOW-level when PLL1 is locked
- Any change of the register content will result in an immediate change of the output behaviour
- Setting control bit SOFTST = 0 is the only way (except power-down via pin V<sub>CC</sub>) to leave the operating mode.

Soft down sequence:

- See L4 of Fig.19 for starting the soft down sequence.

I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

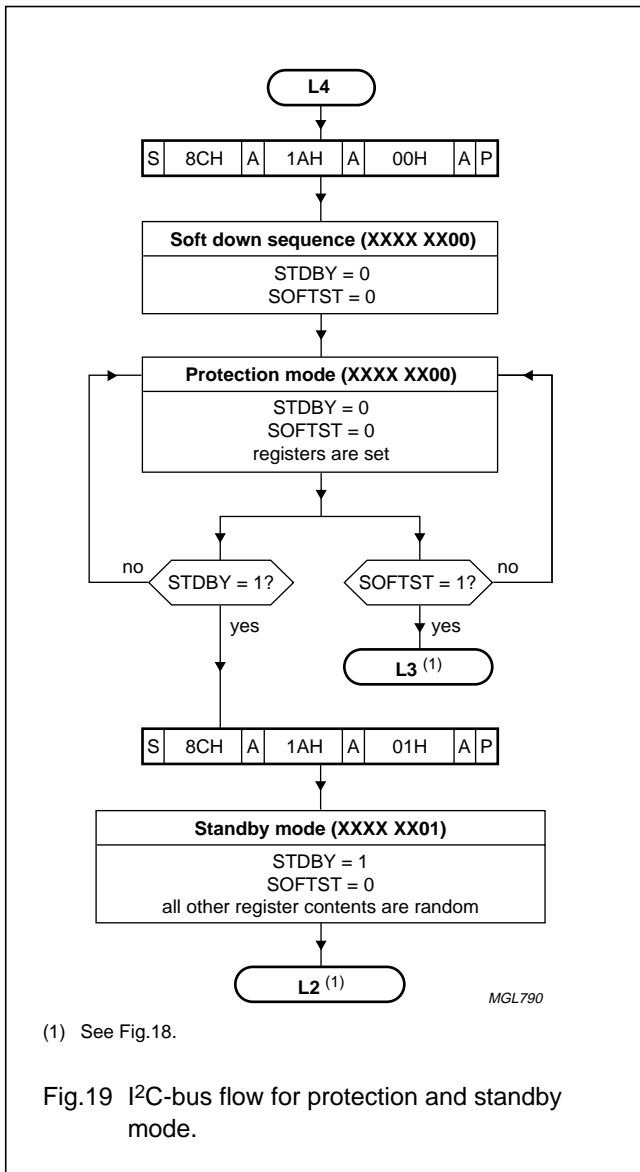

**Protection and standby mode**

Soft down sequence:

- Start the sequence by setting control bit SOFTST = 0
- BDRV duty cycle decreases
- HDRV duty cycle decreases.

Protection mode:

- Pins HDRV and BDRV are floating
- Pins VOUT1 and VOUT2 are floating
- Continuous blanking on pin CLBL is active
- Pin HUNLOCK is floating
- PLL1 and PLL2 are disabled
- Register contents are kept in internal memory.

Protection mode can be left by 3 ways:


1. Entering standby mode by setting control bit SOFTST = 0 and bit STDBY = 1
2. Starting the soft start sequence by setting control bit SOFTST = 1 (bit STDBY = don't care); see L3 of Fig.18 for continuation
3. Decreasing the supply voltage below 8.1 V.

Standby mode:

- Set control bit STDBY = 1
- Driver outputs are floating (same as protection mode)
- Supply current is 9 mA
- Only the I<sup>2</sup>C-bus section and protection circuits are operative
- Contents of all registers are lost, except the value of bit STDBY and bit SOFTST
- See L2 of Fig.18 for continuation.

I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

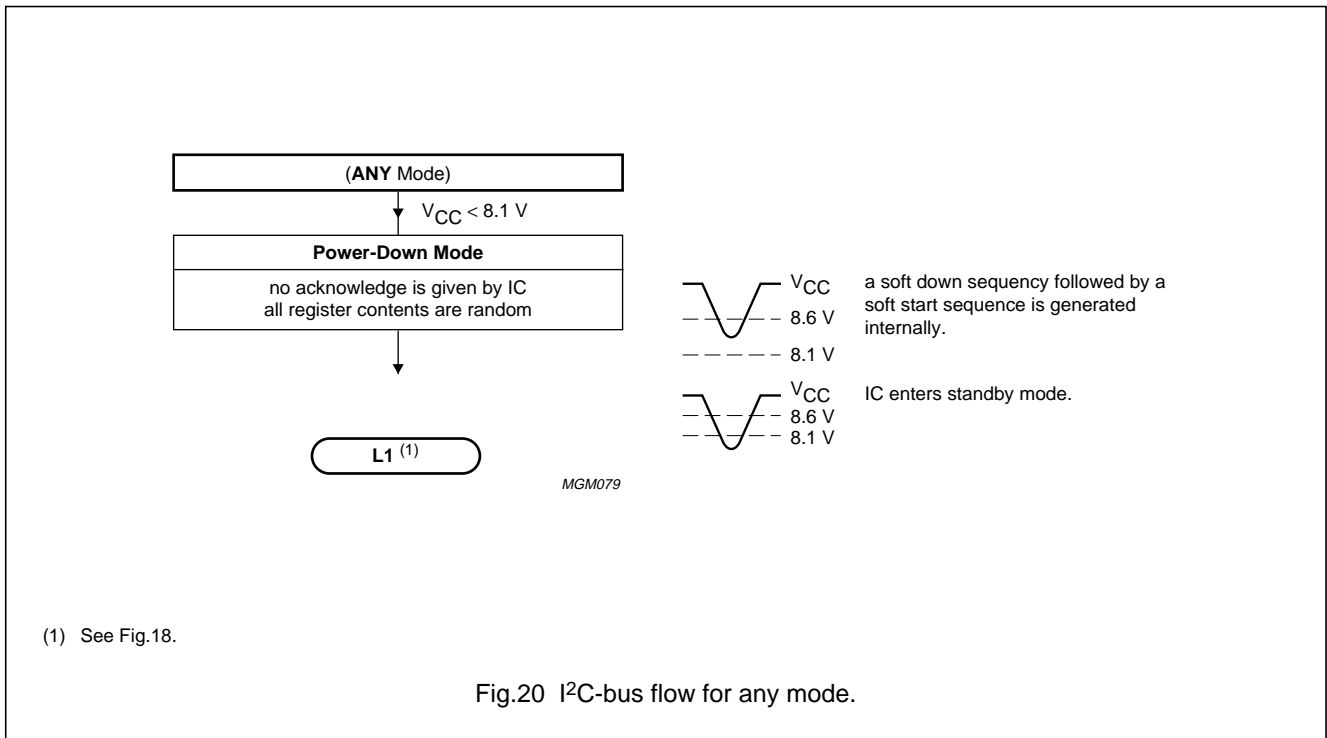

**Power-down mode**

Power dip of  $V_{CC} < 8.6\text{ V}$ :


- The soft down sequence is started first
- Then the soft start sequence is generated internally.

Power dip of  $V_{CC} < 8.1\text{ V}$  or  $V_{CC}$  shut-down:

- This function is independent from the operating mode, therefore it works under any condition
- All driver outputs are immediately disabled
- IC enters standby mode.

**Standby mode detection**

Execute data transmission twice to assure that there was no data transfer error.

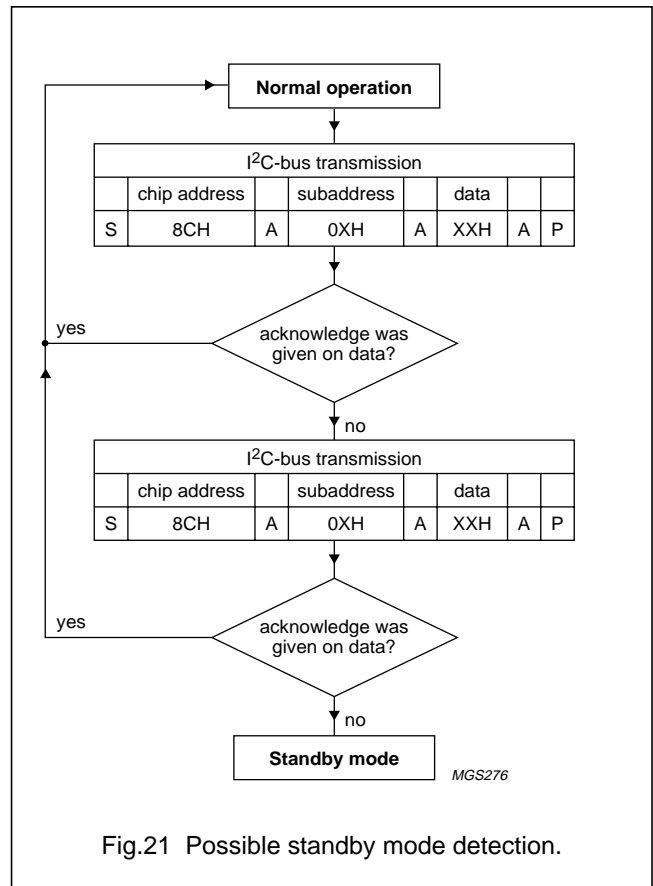




I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS


Start-up and shut-down sequences

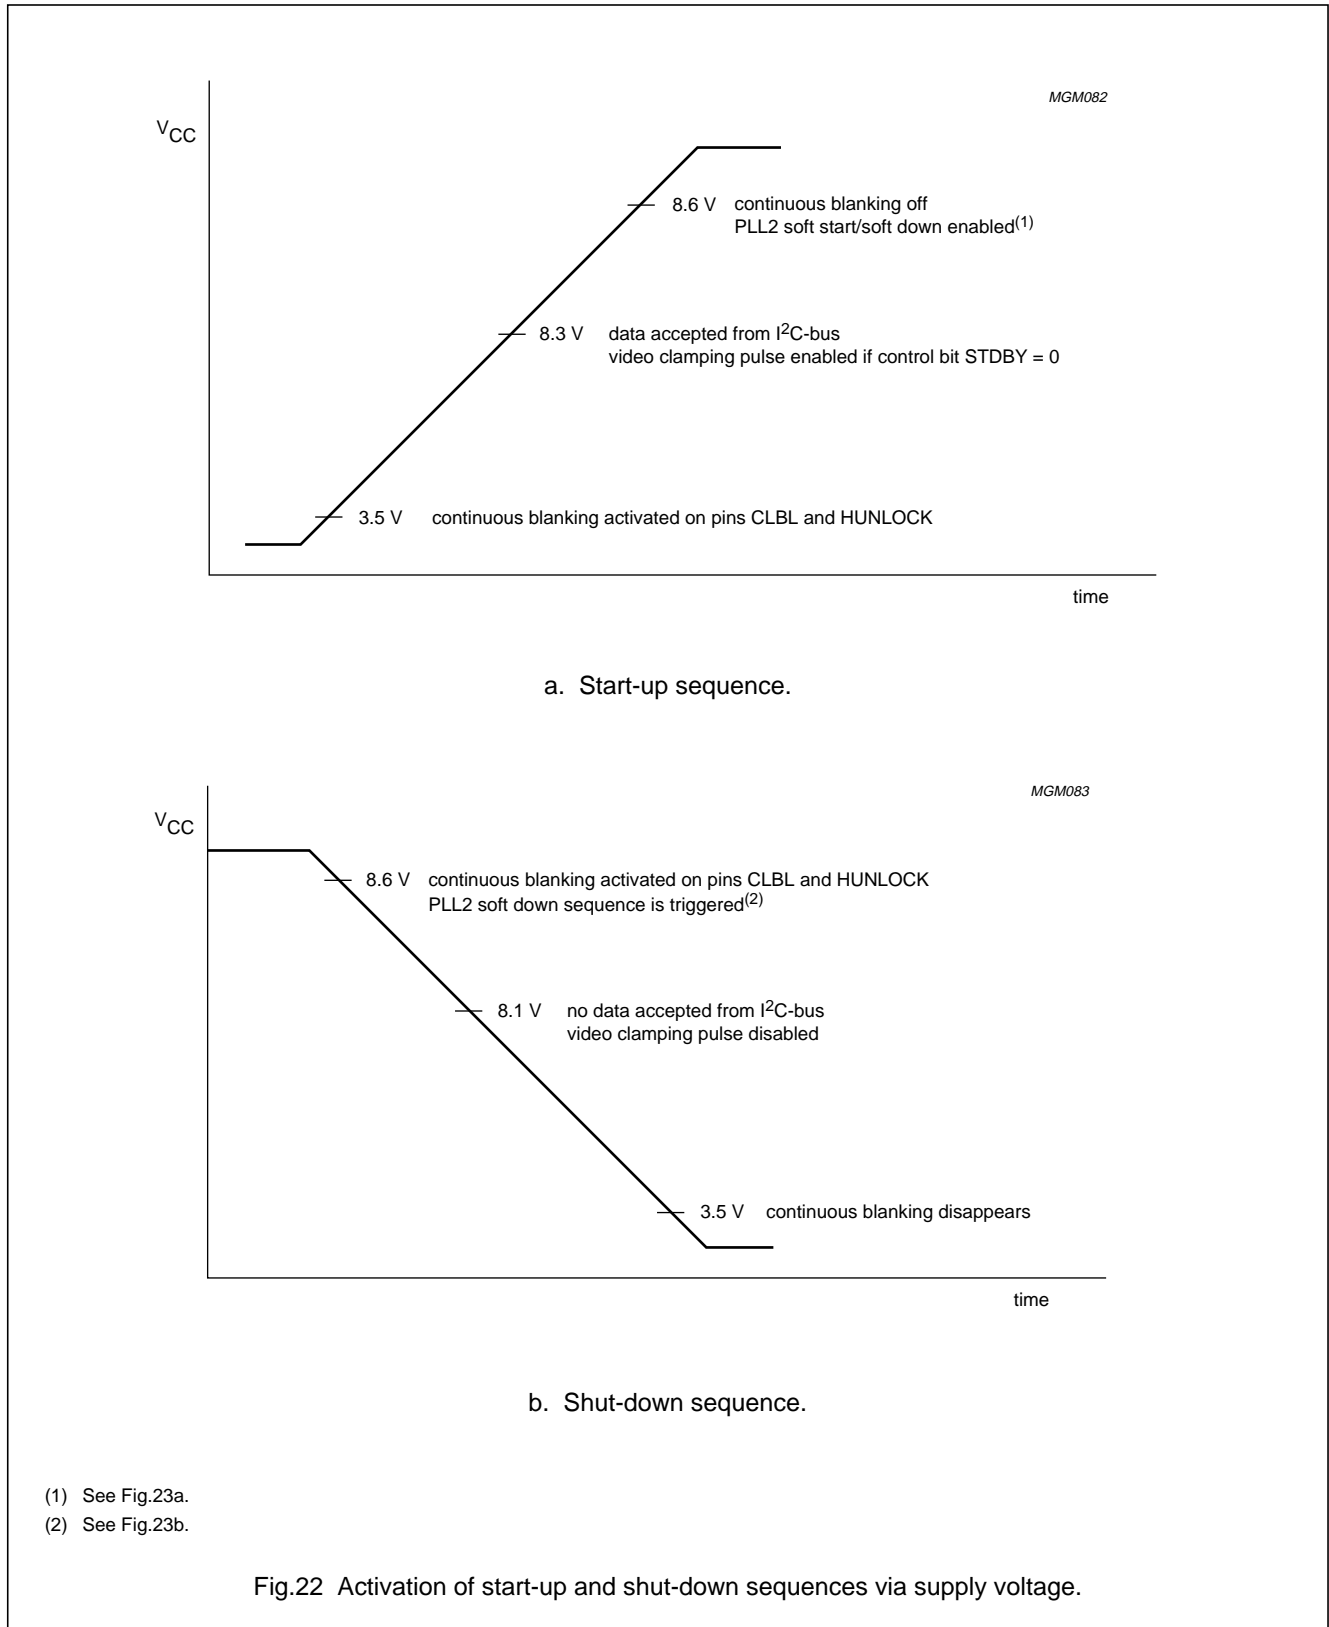


I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

PLL2 soft start and soft down sequences

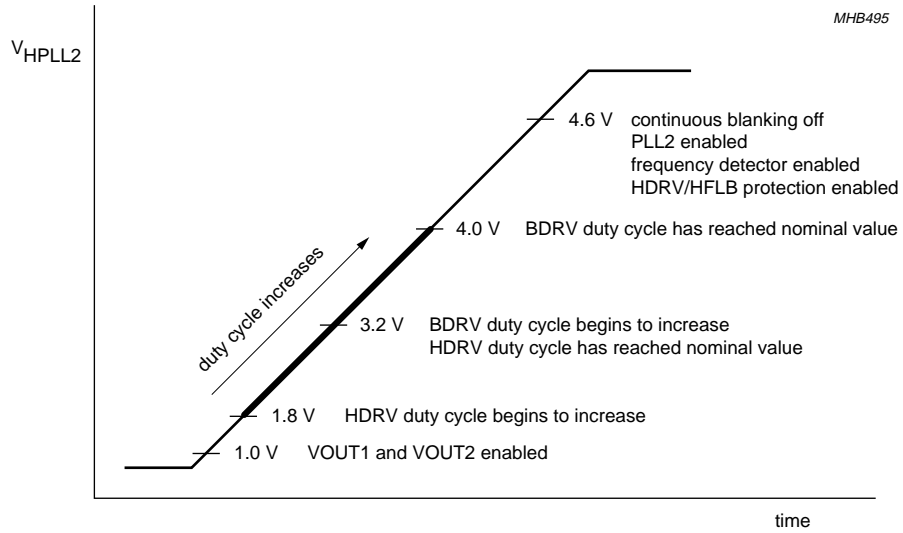

a. PLL2 soft start sequence for  $V_{CC} > 8.6$  V.

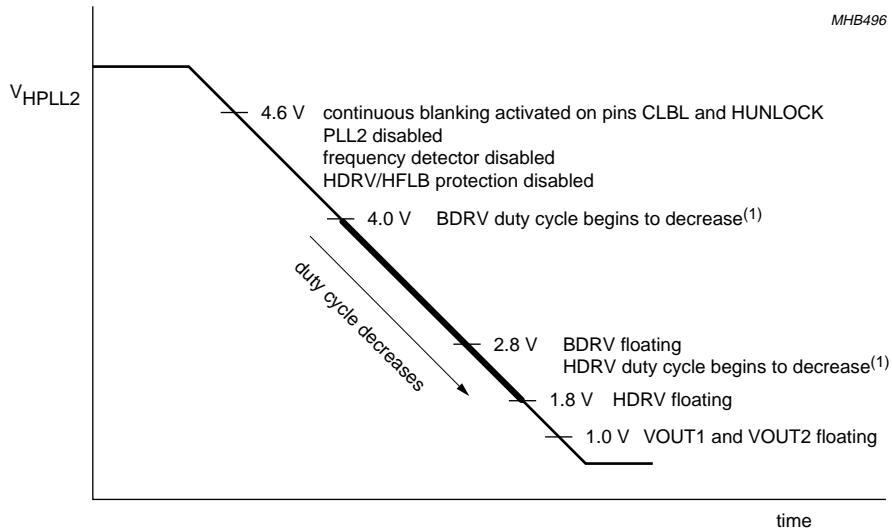

b. PLL2 soft down sequence for  $V_{CC} > 8.6$  V.

(1) Pins HDRV and BDRV are floating for  $V_{CC} < 8.6$  V.

Fig.23 Activation of PLL2 soft start and soft down sequences via the I<sup>2</sup>C-bus.

I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS


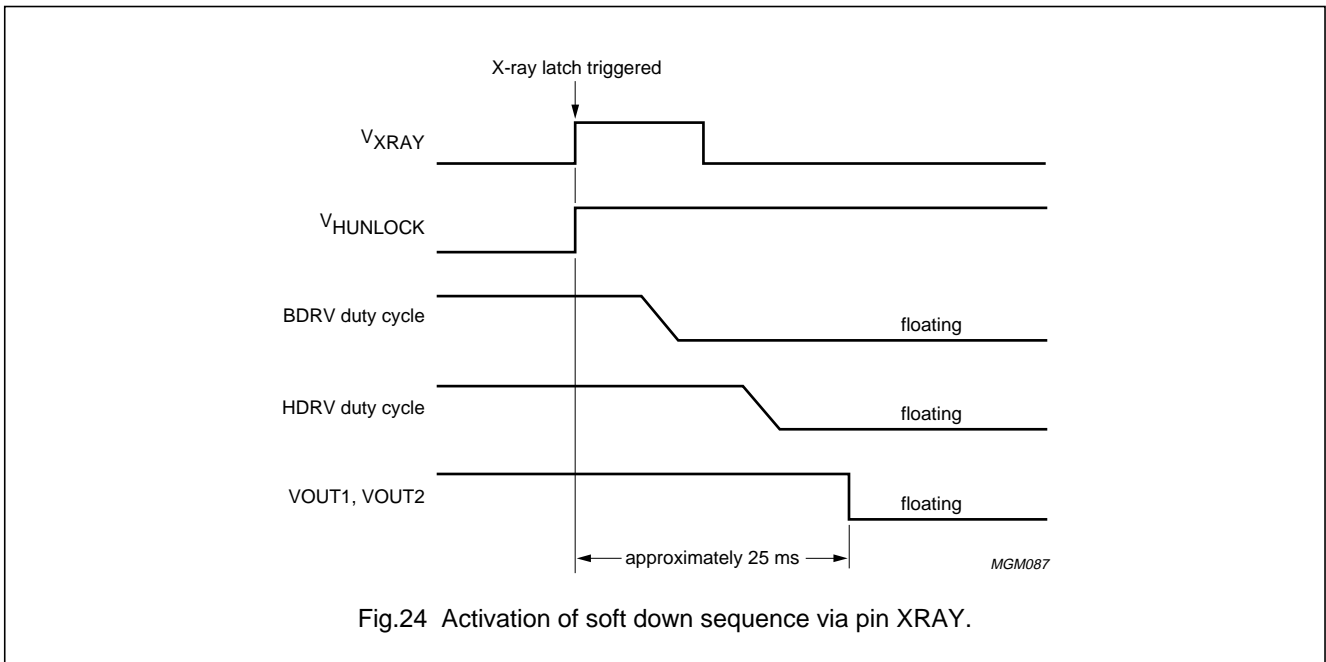


Fig.24 Activation of soft down sequence via pin XRAY.

# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

## TDA4841PS


### APPLICATION INFORMATION

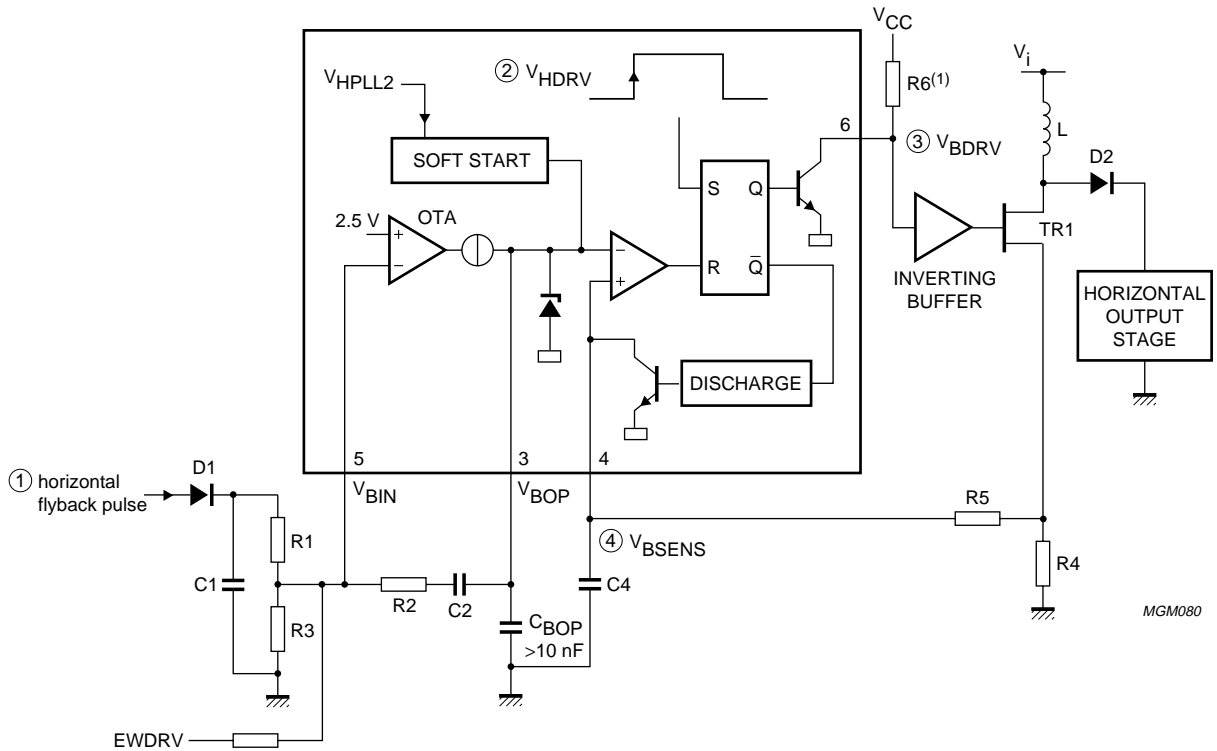

For  $f < 50$  kHz and  $C2 < 47$  nF calculation formulas and behaviour of the OTA are the same as for an OP. An exception is the limited output current at BOP (pin 3). See Chapter "Characteristics", subheading "B+ control section; see Figs 25 and 26".

(1) The recommended value for R6 is 1 k $\Omega$ .

#### a. Feedback mode application.

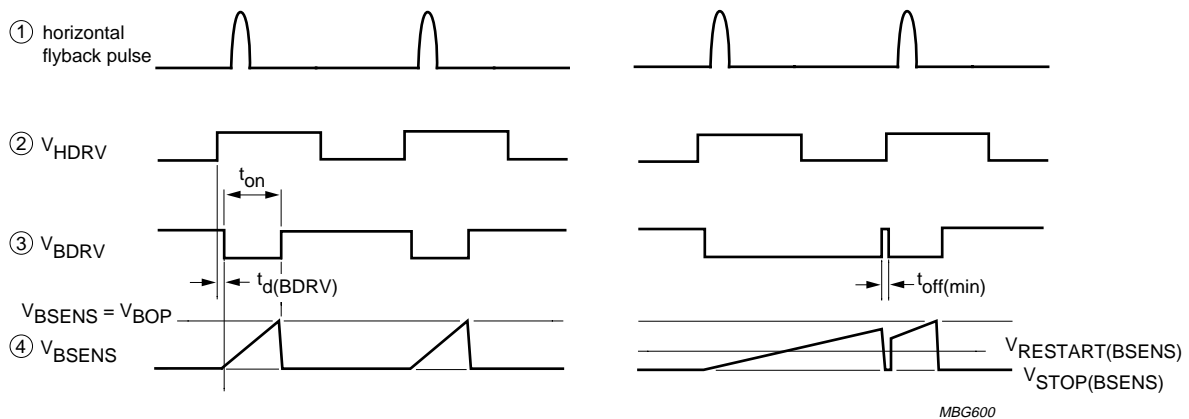


b. Waveforms for normal operation.

c. Waveforms for fault condition.

Fig.25 Application and timing for feedback mode.


I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

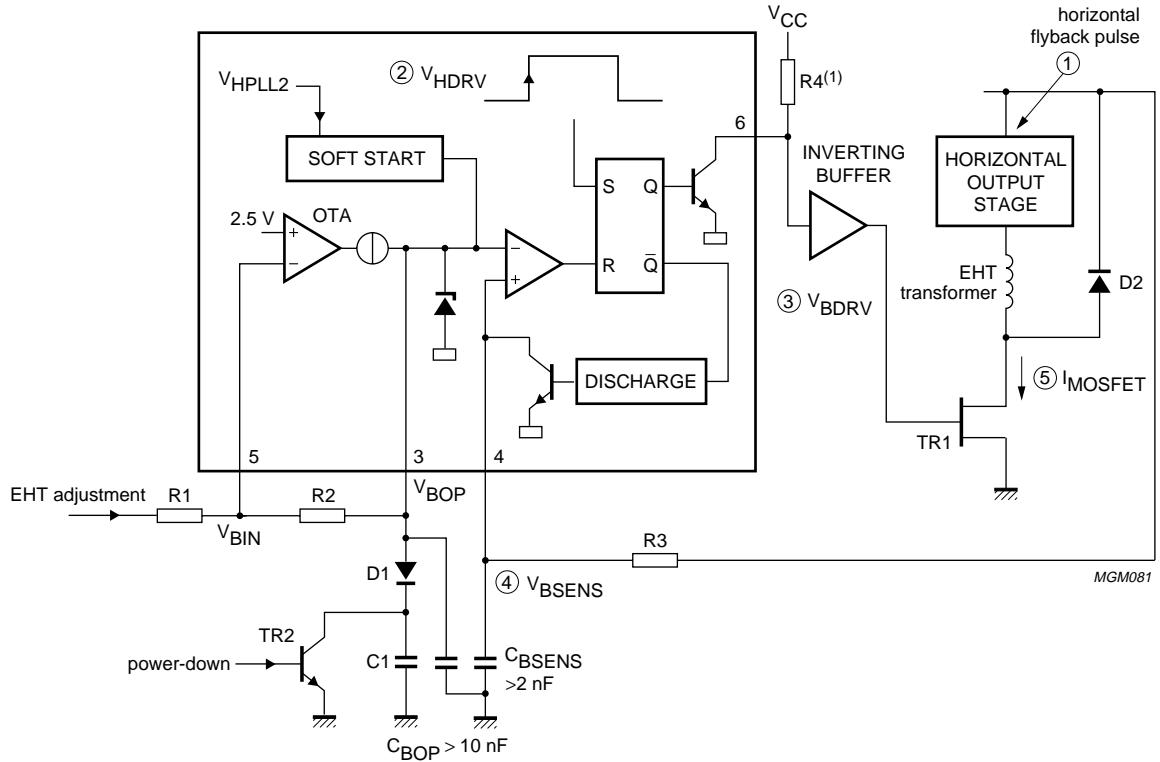

(1) The recommended value for R4 is 1 kΩ.

a. Forward mode application.

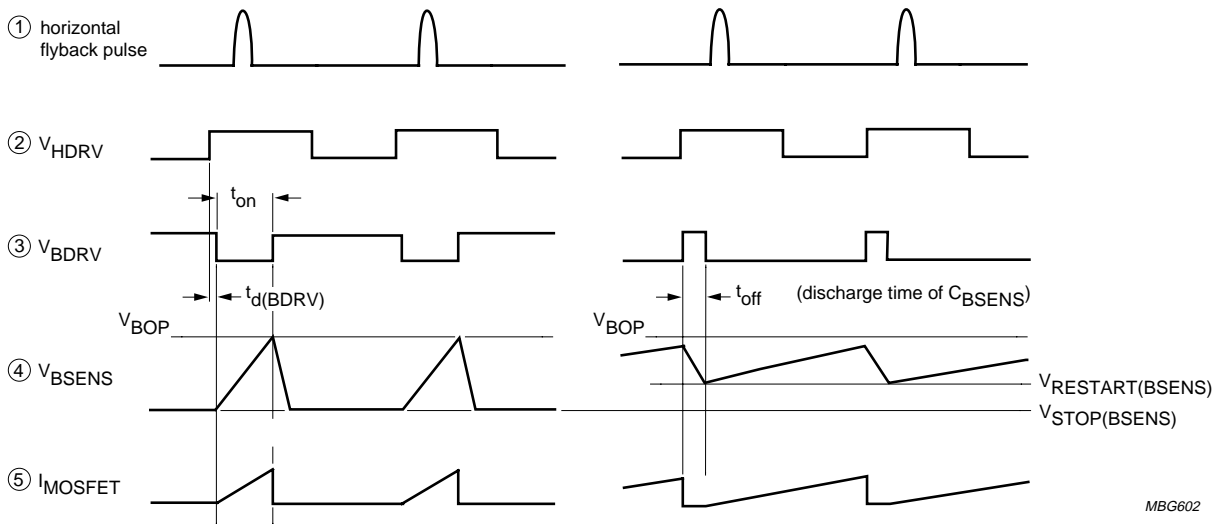

b. Waveforms for normal operation.

c. Waveforms for fault condition.

Fig.26 Application and timing for feed forward mode.

I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

Vertical linearity error

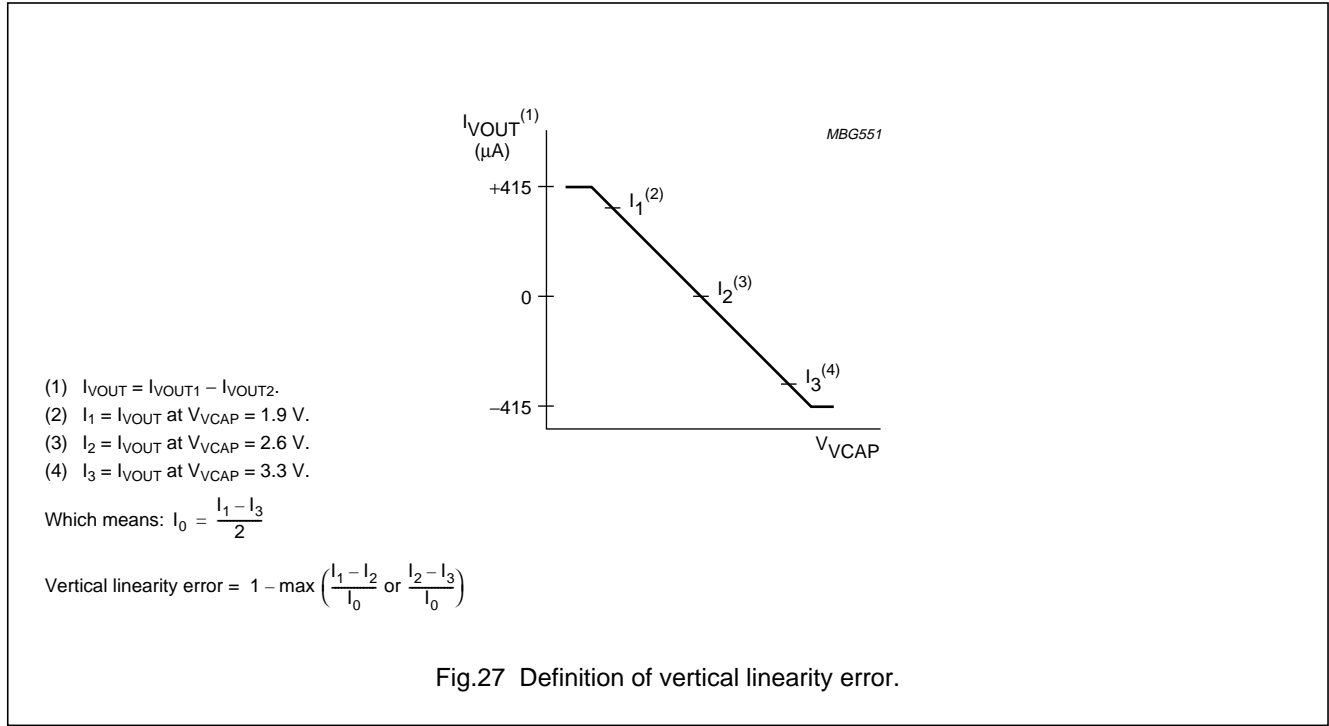


Fig.27 Definition of vertical linearity error.

H-focus pre-correction


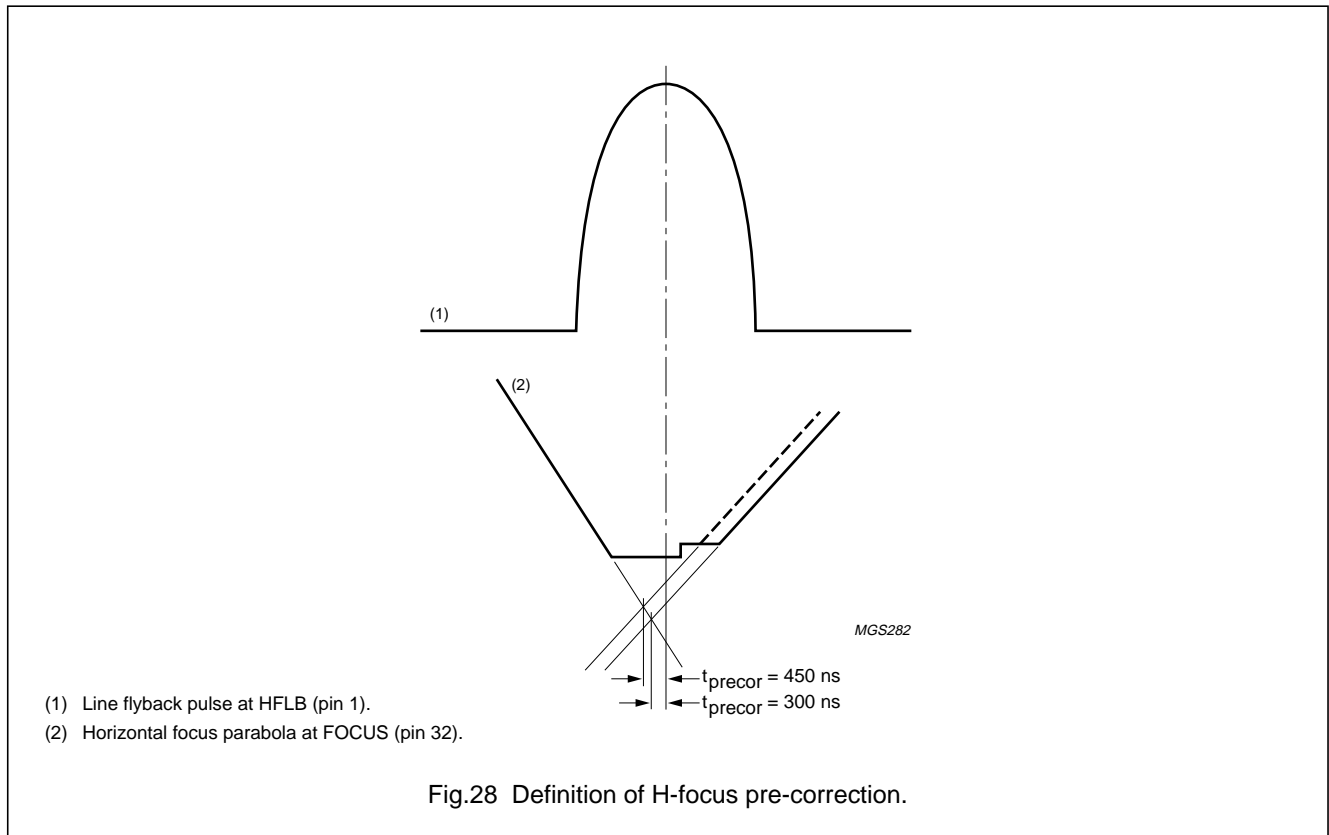


Fig.28 Definition of H-focus pre-correction.

I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

Printed-circuit board layout

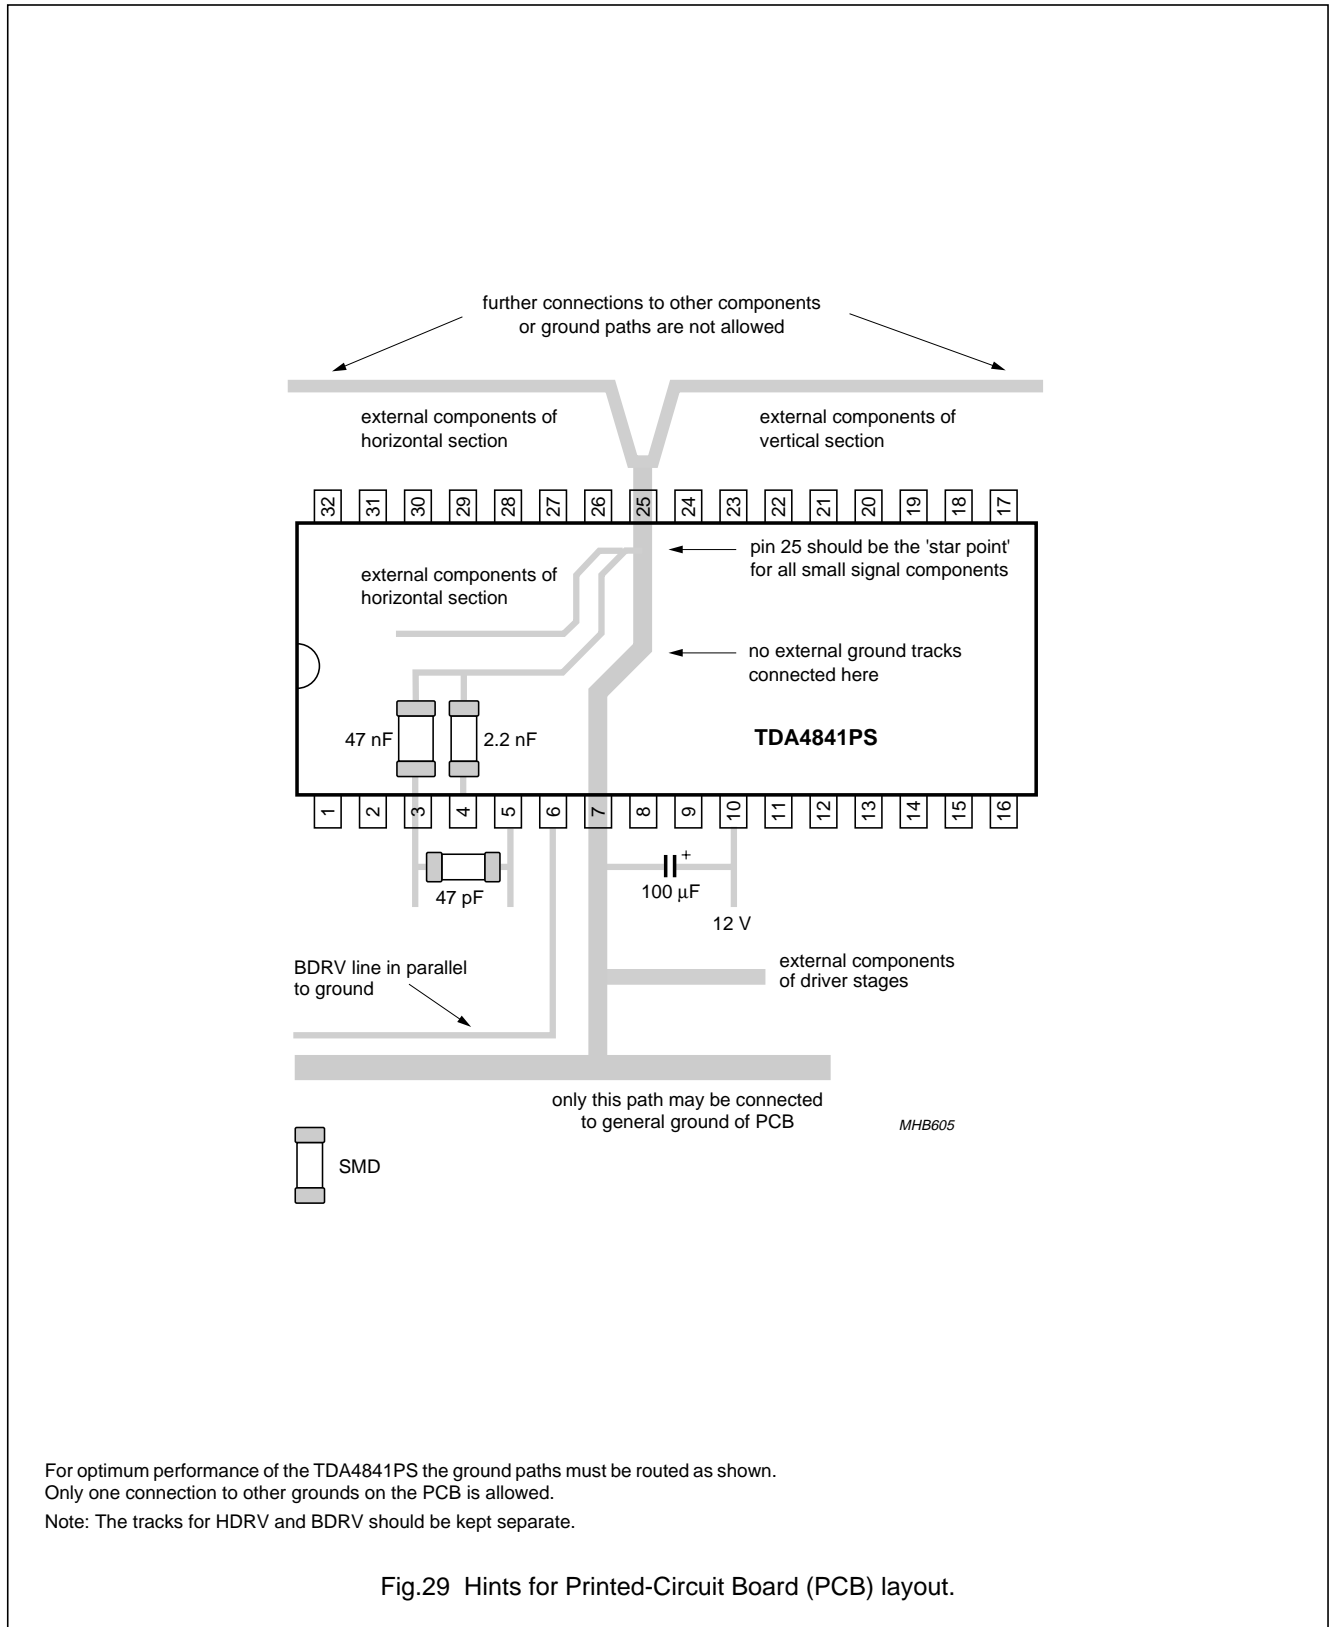

For optimum performance of the TDA4841PS the ground paths must be routed as shown. Only one connection to other grounds on the PCB is allowed.  
 Note: The tracks for HDRV and BDRV should be kept separate.

Fig.29 Hints for Printed-Circuit Board (PCB) layout.

I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

INTERNAL PIN CONFIGURATION

| PIN | SYMBOL | INTERNAL CIRCUIT |
|-----|--------|------------------|
| 1   | HFLB   |                  |
| 2   | XRAY   |                  |
| 3   | BOP    |                  |
| 4   | BSENS  |                  |








I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

| PIN | SYMBOL          | INTERNAL CIRCUIT                     |
|-----|-----------------|--------------------------------------|
| 5   | BIN             |                                      |
| 6   | BDRV            |                                      |
| 7   | PGND            | power ground, connected to substrate |
| 8   | HDRV            |                                      |
| 9   | XSEL            |                                      |
| 10  | V <sub>CC</sub> |                                      |
| 11  | EWDRV           |                                      |






I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS
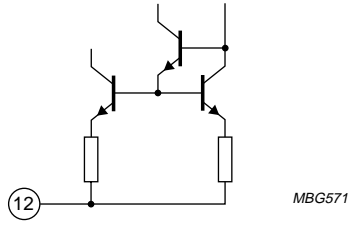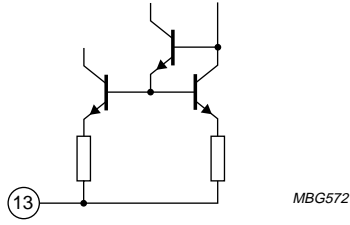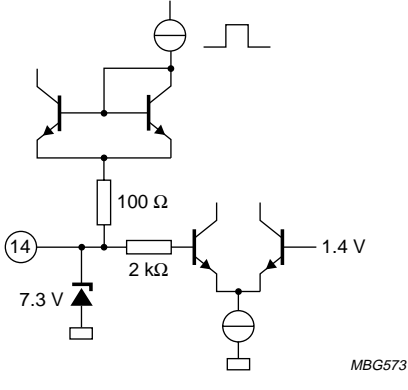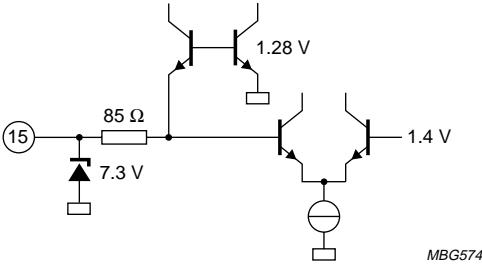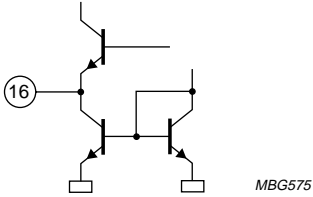
| PIN | SYMBOL | INTERNAL CIRCUIT   |
|-----|--------|--|
| 12  | VOUT2  |  <p>MBG571</p>   |
| 13  | VOUT1  |  <p>MBG572</p>   |
| 14  | VSYNC  |  <p>MBG573</p>  |
| 15  | HSYNC  |  <p>MBG574</p> |
| 16  | CLBL   |  <p>MBG575</p> |





I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS
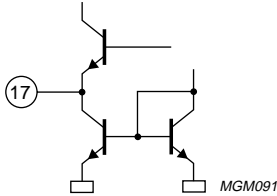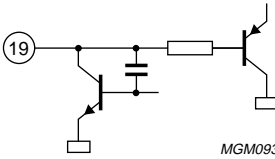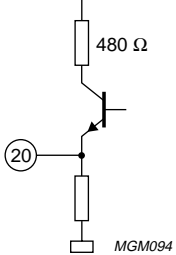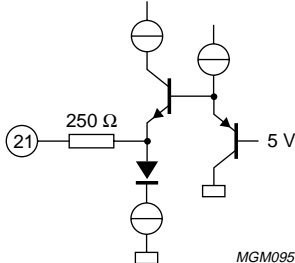
| PIN | SYMBOL  | INTERNAL CIRCUIT   |
|-----|---------|--|
| 17  | HUNLOCK |    |
| 18  | SCL     |    |
| 19  | SDA     |   |
| 20  | ASCOR   |  |
| 21  | VSMOD   |  |




I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS
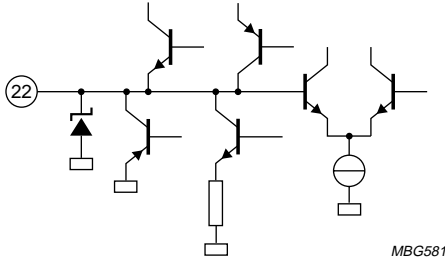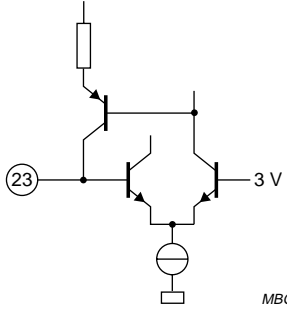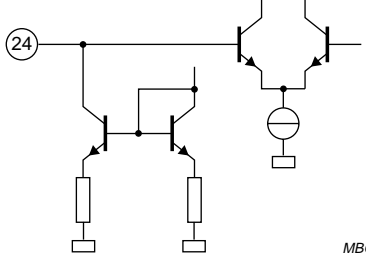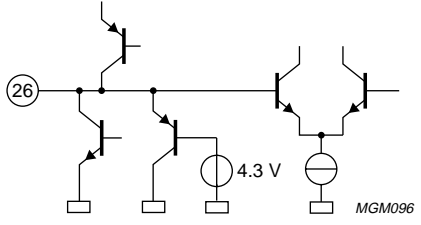
| PIN | SYMBOL | INTERNAL CIRCUIT  |
|-----|--------|---|
| 22  | VAGC   |  <p style="text-align: right; margin-right: 50px;">MBG581</p>   |
| 23  | VREF   |  <p style="text-align: right; margin-right: 50px;">MBG582</p>  |
| 24  | VCAP   |  <p style="text-align: right; margin-right: 50px;">MBG583</p> |
| 25  | SGND   | signal ground   |
| 26  | HPLL1  |  <p style="text-align: right; margin-right: 50px;">MGM096</p> |



I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

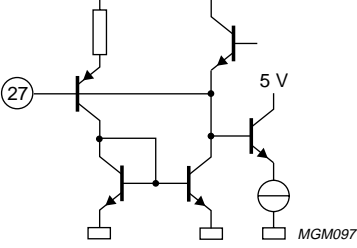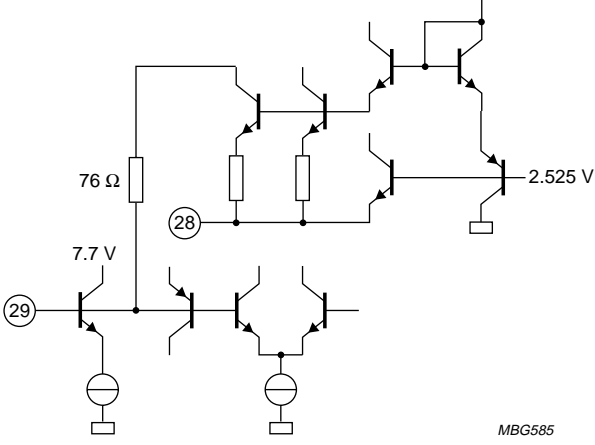
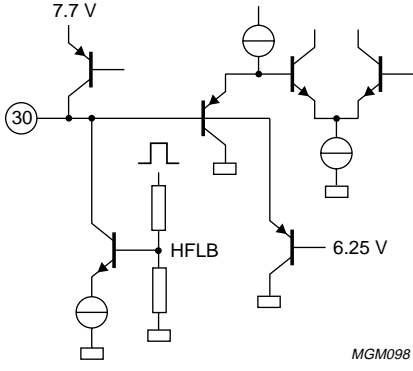
| PIN      | SYMBOL       | INTERNAL CIRCUIT   |
|----------|--------------|--|
| 27       | HBUF         |    |
| 28<br>29 | HREF<br>HCAP |   |
| 30       | HPLL2        |  |

I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS
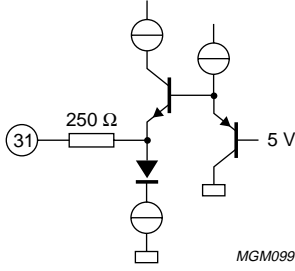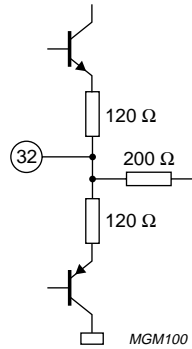
| PIN | SYMBOL | INTERNAL CIRCUIT  |
|-----|--------|---|
| 31  | HSMOD  |   |
| 32  | FOCUS  |  |

Electrostatic discharge (ESD) protection

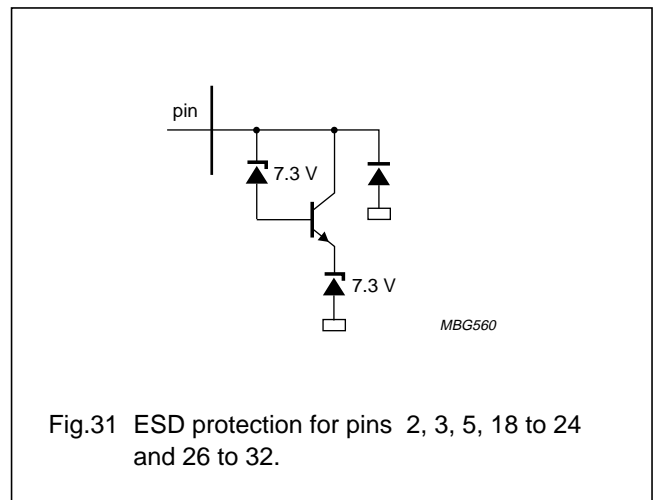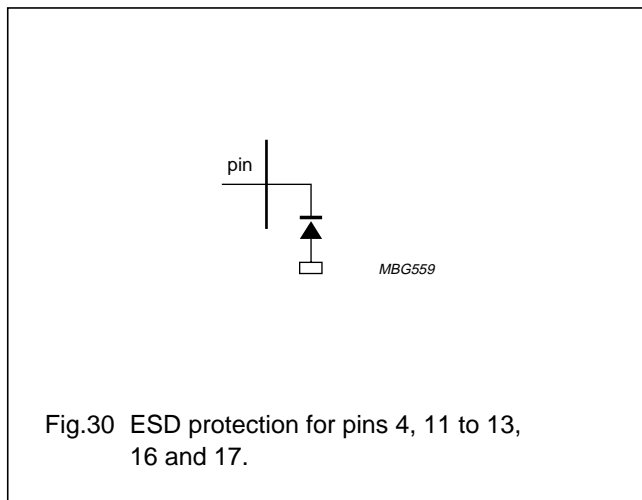


I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

PACKAGE OUTLINE

SDIP32: plastic shrink dual in-line package; 32 leads (400 mil)

SOT232-1

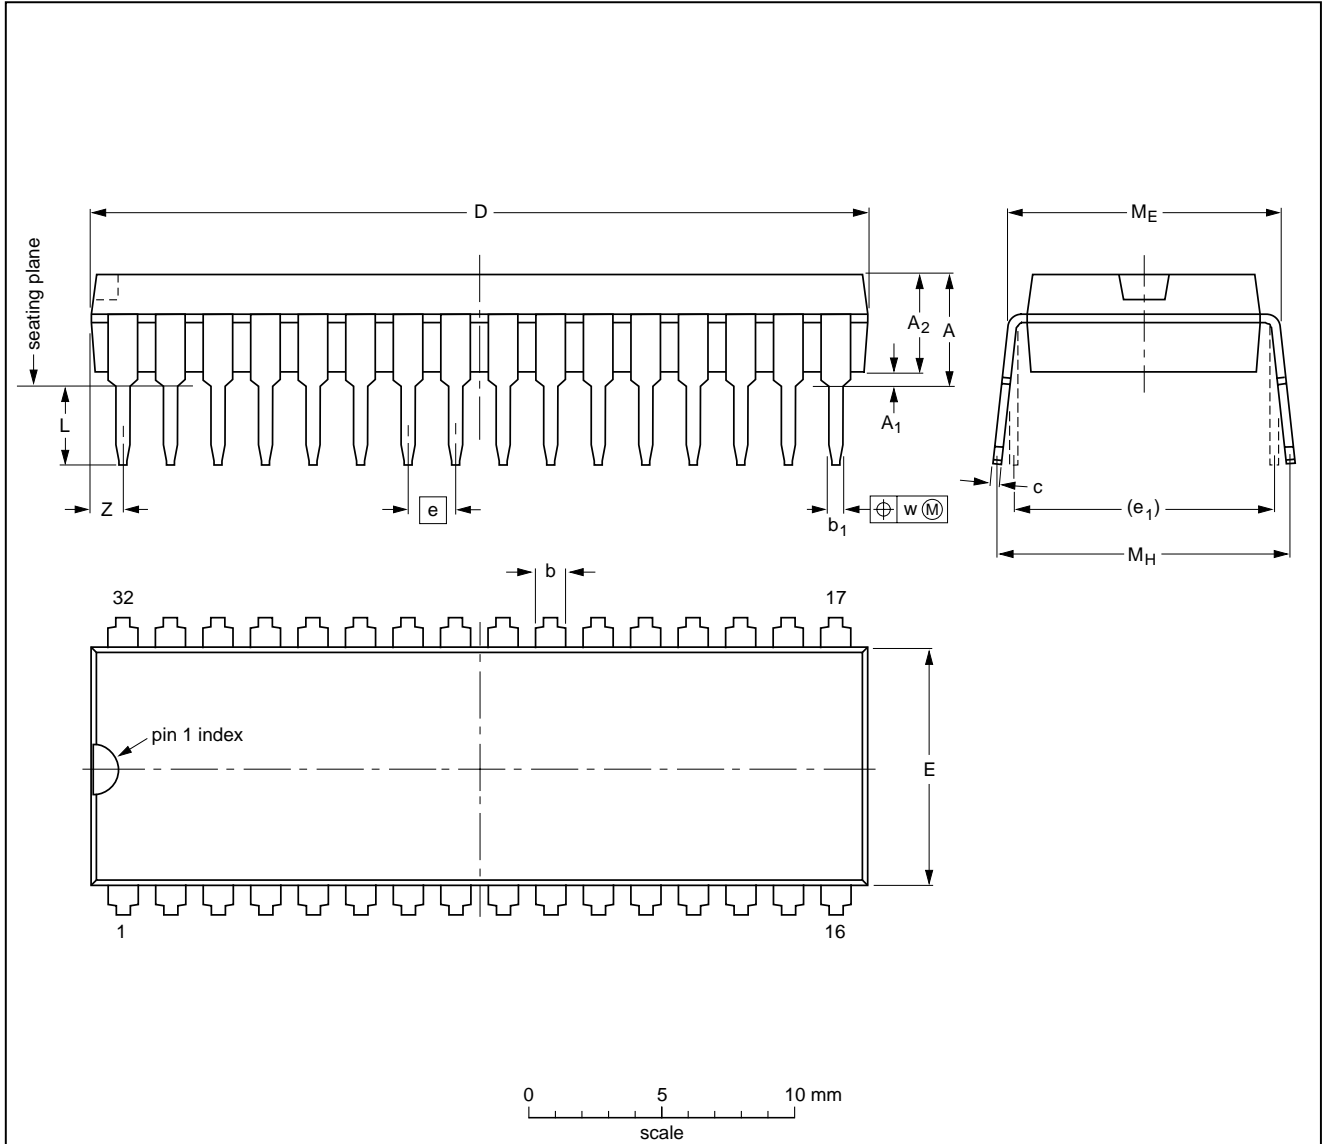

DIMENSIONS (mm are the original dimensions)

| UNIT | A max. | A <sub>1</sub> min. | A <sub>2</sub> max. | b          | b <sub>1</sub> | c            | D <sup>(1)</sup> | E <sup>(1)</sup> | e     | e <sub>1</sub> | L          | M <sub>E</sub> | M <sub>H</sub> | w    | Z <sup>(1)</sup> max. |
|------|--------|---------------------|---------------------|------------|----------------|--------------|------------------|------------------|-------|----------------|------------|----------------|----------------|------|-----------------------|
| mm   | 4.7    | 0.51                | 3.8                 | 1.3<br>0.8 | 0.53<br>0.40   | 0.32<br>0.23 | 29.4<br>28.5     | 9.1<br>8.7       | 1.778 | 10.16          | 3.2<br>2.8 | 10.7<br>10.2   | 12.2<br>10.5   | 0.18 | 1.6                   |

Note  
1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

| OUTLINE VERSION | REFERENCES |       |       |  | EUROPEAN PROJECTION | ISSUE DATE           |
|-----------------|------------|-------|-------|--|---------------------|----------------------|
|                 | IEC        | JEDEC | JEITA |  |                     |                      |
| SOT232-1        |            |       |       |  |                     | 95-02-04<br>03-02-13 |

## I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

### SOLDERING

#### Introduction to soldering through-hole mount packages

This text gives a brief insight to wave, dip and manual soldering. A more in-depth account of soldering ICs can be found in our *"Data Handbook IC26; Integrated Circuit Packages"* (document order number 9398 652 90011).

Wave soldering is the preferred method for mounting of through-hole mount IC packages on a printed-circuit board.

#### Soldering by dipping or by solder wave

Driven by legislation and environmental forces the worldwide use of lead-free solder pastes is increasing. Typical dwell time of the leads in the wave ranges from 3 to 4 seconds at 250 °C or 265 °C, depending on solder material applied, SnPb or Pb-free respectively.

The total contact time of successive solder waves must not exceed 5 seconds.

The device may be mounted up to the seating plane, but the temperature of the plastic body must not exceed the specified maximum storage temperature ( $T_{stg(max)}$ ). If the printed-circuit board has been pre-heated, forced cooling may be necessary immediately after soldering to keep the temperature within the permissible limit.

#### Manual soldering

Apply the soldering iron (24 V or less) to the lead(s) of the package, either below the seating plane or not more than 2 mm above it. If the temperature of the soldering iron bit is less than 300 °C it may remain in contact for up to 10 seconds. If the bit temperature is between 300 and 400 °C, contact may be up to 5 seconds.

#### Suitability of through-hole mount IC packages for dipping and wave soldering methods

| PACKAGE                         | SOLDERING METHOD |                         |
|---------------------------------|------------------|-------------------------|
|                                 | DIPPING          | WAVE                    |
| DBS, DIP, HDIP, RDBS, SDIP, SIL | suitable         | suitable <sup>(1)</sup> |
| PMFP <sup>(2)</sup>             | –                | not suitable            |

#### Notes

- For SDIP packages, the longitudinal axis must be parallel to the transport direction of the printed-circuit board.
- For PMFP packages hot bar soldering or manual soldering is suitable.



# I<sup>2</sup>C-bus autosync deflection controller for PC monitors

TDA4841PS

## DATA SHEET STATUS

| LEVEL | DATA SHEET STATUS <sup>(1)</sup> | PRODUCT STATUS <sup>(2)(3)</sup> | DEFINITION   |
|-------|----------------------------------|----------------------------------|--|
| I     | Objective data                   | Development                      | This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.  |
| II    | Preliminary data                 | Qualification                    | This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.             |
| III   | Product data                     | Production                       | This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). |

### Notes

1. Please consult the most recently issued data sheet before initiating or completing a design.
2. The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.
3. For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

### DEFINITIONS

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

### DISCLAIMERS

**Life support applications** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

---

I<sup>2</sup>C-bus autosync deflection controller for  
PC monitors

---

TDA4841PS

**PURCHASE OF PHILIPS I<sup>2</sup>C COMPONENTS**



Purchase of Philips I<sup>2</sup>C components conveys a license under the Philips' I<sup>2</sup>C patent to use the components in the I<sup>2</sup>C system provided the system conforms to the I<sup>2</sup>C specification defined by Philips. This specification can be ordered using the code 9398 393 40011.

# ***Philips Semiconductors – a worldwide company***

## **Contact information**

For additional information please visit <http://www.semiconductors.philips.com>. Fax: +31 40 27 24825

For sales offices addresses send e-mail to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com).

© Koninklijke Philips Electronics N.V. 2003

SCA75

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

753504/03/pp59

Date of release: 2003 Sep 30

Document order number: 9397 750 11606

*Let's make things better.*

**Philips  
Semiconductors**



**PHILIPS**