


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		Design Modify	Sammy	
△		Design Modify	02/23/05	
△		Design Modify	02/23/05	
△		Design Modify	02/23/05	

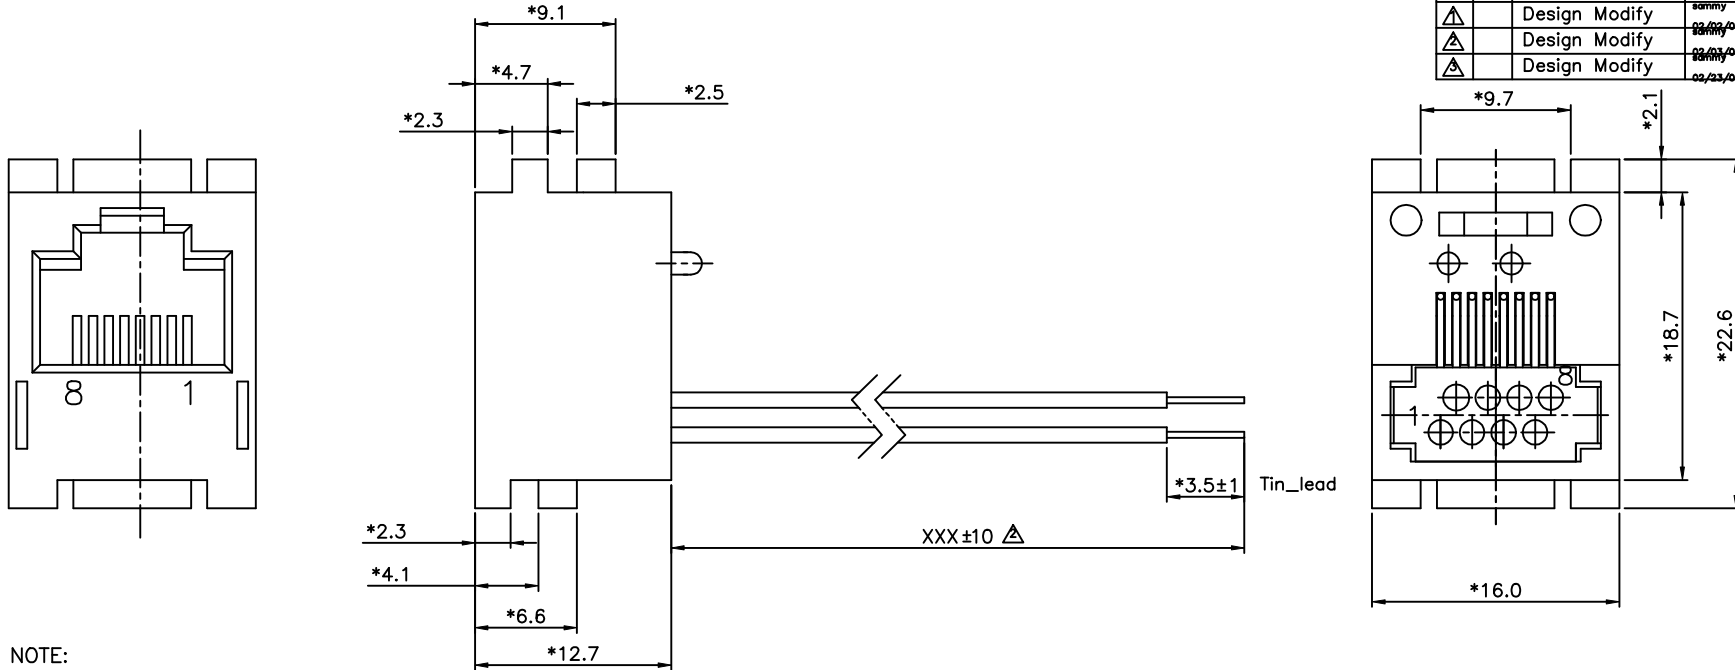

NOTE:

- MATERIAL: HOUSING - ABS RESIN UL94V-0
CONTACT - 0.46mm DIAMETER
PHOS-BRONZE PLATED WITH HARD GOLD.
TERMINAL - 0.25mm THICKNESS 3/4 HARD BRASS, 2.5um<SOLDER(TIN-LEAD).
WIRE STYLE - UL1061 E41396 AWM80°C VW-1, 300V, 26AWG. PVC INSULATION, TOP COATED UL1061 WIRE.
- CAVITY CONFIRMS TO FCC RULES AND REGULATION PART68, SUBPART F.

△ △ 3. PART NUMBER: 8TYBXXX-YDXX


Wire Length	1- 3u"	2- 6u"
200	3-15u"	4-30u"
300	5-50u"	6-Pd 20u"
150	HOUSING COLOR	
	1-BK	
	2-GY	

ELECTRICAL CHARACTERISTICS:

- INSULATION RESISTANCE - 500MΩ OR MORE.
- WITHSTAND VOLTAGE - AC 500V 1 MINUTE.
- CONTACT RESISTANCE - 50mΩ MAX.
- RATING CURRENT - 1.5A MAX.

MECHANICAL CHARACTERISTICS:

- MATING FORCE - 305 Grams --- 2 Wire lead
- 500 Grams --- 4 Wire lead
- 750 Grams --- 6 Wire lead
- RETENTION STRENGTH - 7.7kg(17 Lbs.) BETWEEN THE JACK AND PLUG.
- CRIMP TENSILE STRENGTH - 2.27kg(5.0 Lbs).

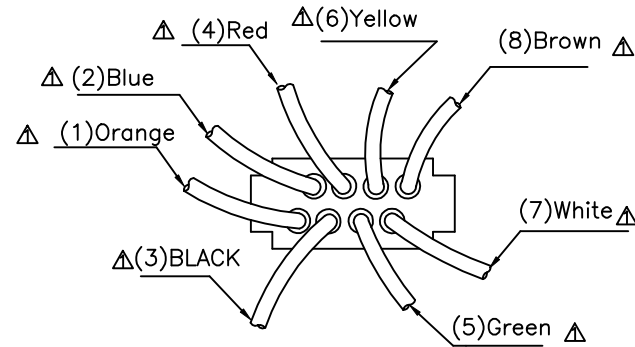

DETACHED LISTS	MM (INCH)	DFTO SAMMY	DATE 05/10/04	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKDQIANPU	DATE 2005/3/9		
	MM	MFO	DATE	TITLE 641 WIRE JACK	
	.0 ±0.20	APPVLLUSHENG	DATE 2005/3/9		
.00 ±0.15	MATERIAL :	DRAWING NO. GE8T3011		SIZE A3	REV 3
.000 ±0.075	ANGLES ±	QTY :	/PART NO. SEE NOTE		
THIRD ANGLE PROJECTION	FINISH :	SCALE : 3:1	DO NOT SCALE DRAWING		SHEET X OF Y