


- Series 310 and 350 interconnects are available in single and double row form.
- Single row interconnects having an even number of pins are now available with a left or right hand footprint.
- Headers (350 & 450) use MM# 3404 pins. (See page 170 for details)
- Sockets (310 & 410) use MM# 1005 receptacles and accept pin diameters from .015-.025. (See page 135 for details)
- Insulators are high temp. thermoplastic.

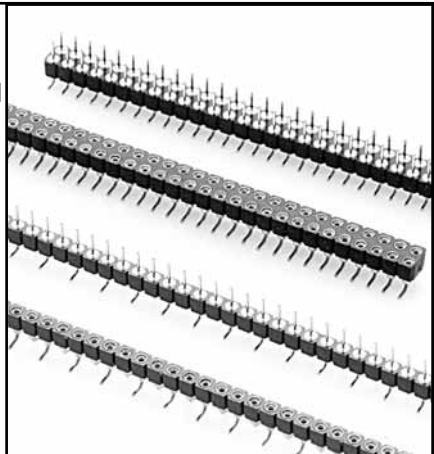

<b>Ordering Information</b>		
<b>Fig. 1L</b>	<b>Single Row Header, Left Hand Footprint</b> <b>Odd or Even # of pins</b>	<b>350-XX-1__-00-106</b>
	<b>Specify # of pins</b>	01-64
<b>Fig. 1R</b>	<b>Single Row Header, Right Hand Footprint</b> <b>Even # of pins</b>	<b>350-XX-1__-00-107</b>
	<b>Specify even # of pins</b>	02-64
<b>Fig. 2</b>	<b>Double Row Header, Even # of pins</b>	<b>450-XX-2__-00-106</b>
	<b>Specify even # of pins</b>	02-72
SPECIFY PLATING CODE XX=		<b>10</b> <b>90</b>
Pin Plating		10µ" Au      200µ" Sn/Pb
<b>Fig. 3L</b>	<b>Single Row Socket, Left Hand Footprint</b> <b>Odd or Even # of pins</b>	<b>310-XX-1__-41-105</b>
	<b>Specify # of pins</b>	01-64
<b>Fig. 3R</b>	<b>Single Row Socket, Right Hand Footprint</b> <b>Even # of pins</b>	<b>310-XX-1__-41-107</b>
	<b>Specify even # of pins</b>	02-64
<b>Fig. 4</b>	<b>Double Row Socket, Even # of pins</b>	<b>410-XX-2__-41-105</b>
	<b>Specify even # of pins</b>	02-72
SPECIFY PLATING CODE XX=		<b>93</b> <b>99</b>
Sleeve (Pin)		200µ" Sn/Pb      200µ" Sn/Pb
Contact (Clip)		30µ" Au      200µ" Sn/Pb