


Part No.	Type	Nominal diameter	Withdraw. force	Rated current	Contact resistance
----------	------	------------------	-----------------	---------------	--------------------

23.1035 B4-E-IM4-I insulated  
 23.5088 B4-E-IM4 non-insulated  
 24.5012 I-A2/4 insulator



4 mm - 25 A -


Sockets 4 mm (.160 in) with screw-on socket internal M 4 thread. Machined brass, nickel plated. Available insulated or non-insulated or as separate parts.

Operating temperature: ..... -40°C to +80°C (-40°F to 176°F)

1:1

Colors: 1, 2, 4, 5

23.1036 B4-E-IM5-I insulated  
 23.5091 B4-E-IM5 non-insulated  
 24.5090 I-KK 2/2 insulator



4 mm - 25 A -


Screw-on sockets 4 mm (.160 in) with internal M 5 thread. Machined brass, nickel plated. Available insulated or non-insulated or as separate parts.

Operating temperature: ..... -40°C to +80°C (-40°F to 176°F)

1:1

Colors: 1, 2, 4, 5

23.0270 LB4-G/M3.5  
 23.0280 LB4-G/M4

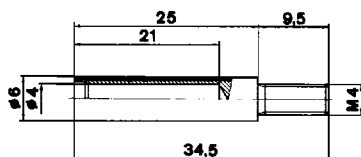

4 mm - 32 A -

Screw-on sockets 4 mm (.160 in) dia., with external M 3.5 or M 4 thread. Machined brass, nickel plated.

Operating temperature: ..... -40°C to +80°C (-40°F to 176°F)

1:1

Colors: 1, 2, 4, 5

23.1031 B4-E-M3-I insulated  
 23.5076 B4-E-M3 non-insulated  
 24.5012 I-A2/4 Insulator



insulated



non-insulated

4 mm - 25 A 0.5 mΩ

Screw-in sockets 4 mm (.160 in) dia. With external M 3 thread. Made of brass, nickel plated. Sockets are available insulated or non-insulated or as separate parts.

Operating temperature: ..... -40°C to +80°C (-40°F to 176°F)

Colors: 1, 2, 4, 5

- 0 - green/yellow    1 - red    2 - blue    3 - white    4 - black    5 - yellow    6 - green    7 - brown    8 - gray    9 - violet