


# Mini Style QD Cordsets

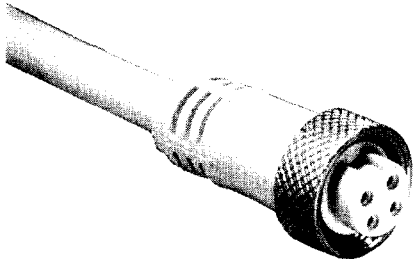

4-Pin Straight Mini Cordset


## Specifications

<b>Coupling Nut</b>	Epoxy-Coated Zinc
<b>Connector</b>	Molded oil-resistant PVC
<b>Contacts</b>	Gold-plated palladium/nickel
<b>Cable</b>	Oil-resistant yellow PVC jacket, 16AWG stranded copper, 600V, UL recognized and CSA certified, STOOW-A
<b>Cable O.D.</b>	3/c = 10mm (0.41in) 4/c = 11mm (0.42in) 5/c = 13mm (0.50in) 6/c = 14mm (0.54in)
<b>Temperature</b>	-20°C to +105°C (-4°F to +221°F)

## Features

- UL recognized and CSA certified
- Heavy duty STOOW-A 16AWG cable
- Highly visible yellow PVC jacket offers good oil and chemical resistance
- One-piece molded body design

## Dimensions—mm (in)

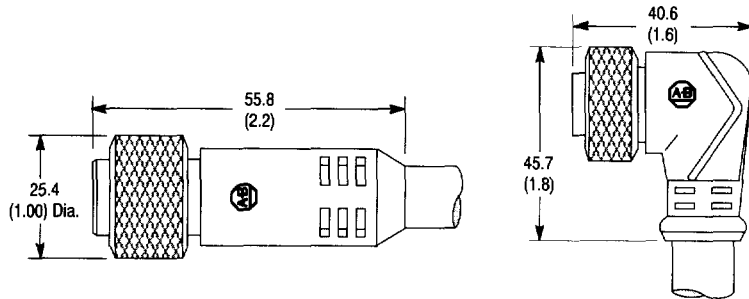

Straight Female

Right Angle Female

Dimensions are approximate. Illustrations are not drawn to scale.

## Selection Guide



Female Connector (Sensor End)	Cable			Catalog Number						
	Face View of Female	Wire Color	Wire Rating	Length—m (ft)	Straight	Right Angle				
	1 Green 2 Black 3 White	16AWG 600V 13A	1.8 (6)	889N-F3AFC-6F	889N-R3AFC-6F					
			3.7 (12)	889N-F3AFC-12F	889N-R3AFC-12F					
			6.1 (20)	889N-F3AFC-20F	889N-R3AFC-20F					
	1 Black 2 Blue 3 Brown 4 White	16AWG 600V 10A	1.8 (6)	889N-F4AF-6F	889N-R4AF-6F					
			3.7 (12)	889N-F4AF-12F	889N-R4AF-12F					
			6.1 (20)	889N-F4AF-20F	889N-R4AF-20F					
			1.8 (6)	889N-F4AFC-6F	889N-R4AFC-6F					
			3.7 (12)	889N-F4AFC-12F	889N-R4AFC-12F					
			6.1 (20)	889N-F4AFC-20F	889N-R4AFC-20F					
	1 Black 2 Blue 3 Orange 4 Brown 5 White	16AWG 600V 8A	1.8 (6)	889N-F5AF-6F	889N-R5AF-6F					
			3.7 (12)	889N-F5AF-12F	889N-R5AF-12F					
			6.1 (20)	889N-F5AF-20F	889N-R5AF-20F					
			1.8 (6)	889N-F5AFC-6F	889N-R5AFC-6F					
			3.7 (12)	889N-F5AFC-12F	889N-R5AFC-12F					
			6.1 (20)	889N-F5AFC-20F	889N-R5AFC-20F					
				1 Blue 2 Orange 3 Red 4 White 5 Brown 6 Black		3.7 (12)	889N-F6AFC-12F	—		
						1 Orange 2 Blue 3 Black	4 White 5 Red 6 Green	5 (16.4)	889N-F6AF-5	—
								10 (32.8)	889N-F6AF-10	—