



DC COMPONENTS CO., LTD.

DISCRETE SEMICONDUCTORS

DXTA44

TECHNICAL SPECIFICATIONS OF NPN EPITAXIAL PLANAR TRANSISTOR

Description


Designed for applications requiring high breakdown voltage.

Pinning

- 1 = Base
- 2 = Collector
- 3 = Emitter

Absolute Maximum Ratings($T_A=25^\circ\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO}	400	V
Collector-Emitter Voltage	V_{CEO}	400	V
Emitter-Base Voltage	V_{EBO}	6	V
Collector Current	I_C	300	mA
Total Power Dissipation	P_D	1	W
Junction Temperature	T_J	+150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 to +150	$^\circ\text{C}$

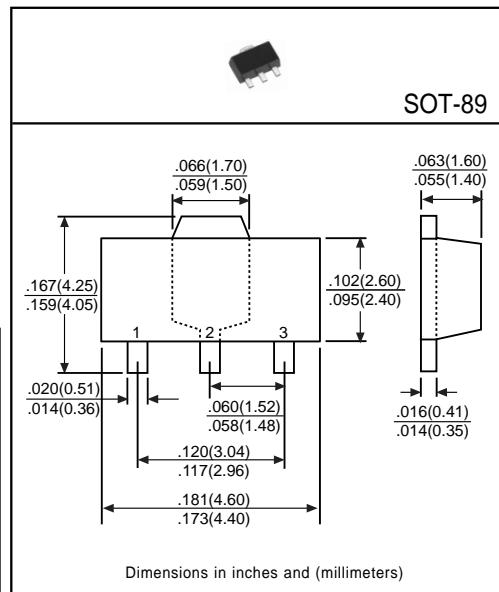

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector-Base Breakdown Volatge	BV_{CBO}	400	-	-	V	$I_C=100\mu\text{A}$
Collector-Emitter Breakdown Voltage	BV_{CEO}	400	-	-	V	$I_C=1\text{mA}$
Emitter-Base Breakdown Volatge	BV_{EBO}	6	-	-	V	$I_E=10\mu\text{A}$
Collector Cutoff Current	I_{CBO}	-	-	100	nA	$V_{CB}=400\text{V}$
	I_{CES}	-	-	500	nA	$V_{CE}=400\text{V}$
Emitter Cutoff Current	I_{EBO}	-	-	100	nA	$V_{EB}=4\text{V}$
Collector-Emitter Saturation Voltage ⁽¹⁾	$V_{CE(\text{sat})1}$	-	-	0.375	V	$I_C=20\text{mA}, I_B=2\text{mA}$
	$V_{CE(\text{sat})2}$	-	-	0.75	V	$I_C=50\text{mA}, I_B=5\text{mA}$
Base-Emitter Saturation Voltage ⁽¹⁾	$V_{BE(\text{sat})}$	-	-	0.75	V	$I_C=10\text{mA}, I_B=1\text{mA}$
DC Current Gain ⁽¹⁾	h_{FE1}	40	-	-	-	$I_C=1\text{mA}, V_{CE}=10\text{V}$
	h_{FE2}	50	-	300	-	$I_C=10\text{mA}, V_{CE}=10\text{V}$
	h_{FE3}	45	-	-	-	$I_C=50\text{mA}, V_{CE}=10\text{V}$
	h_{FE4}	40	-	-	-	$I_C=100\text{mA}, V_{CE}=10\text{V}$
Output Capacitance	C_{ob}	-	4	6	pF	$V_{CB}=20\text{V}, f=1\text{MHz}$

(1)Pulse Test: Pulse Width $\leq 380\mu\text{s}$, Duty Cycle $\leq 2\%$