
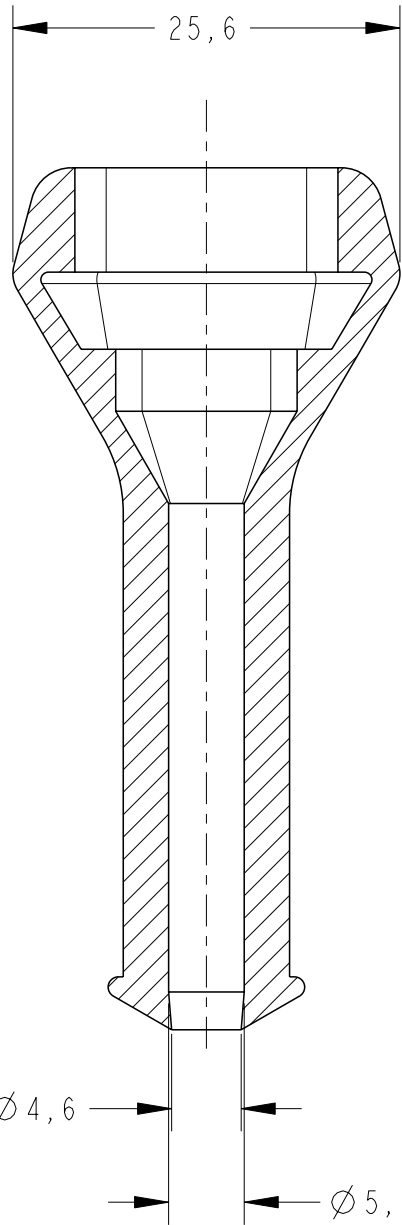


LOC	DIST	REVISIONS					
AP	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
 ProENGINEER WILDFIRE 4.0 <i>DO NOT REVISE</i> <i>EXCEPT BY CAD</i>		DI	OBSOLETE DASH I	ECO-13-006169	09APR2013	NCL	DAO

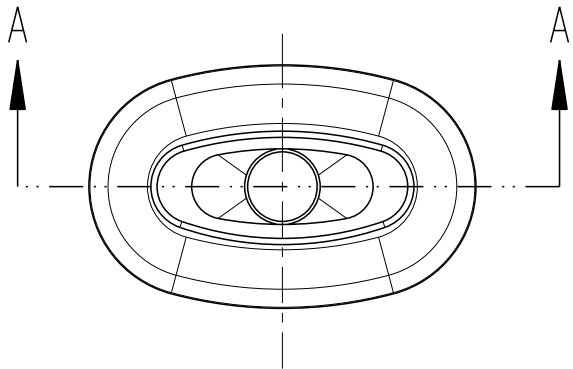

SECTION A - A


Ø 4,6

Ø 5,0

- 1 - ELASTÔMERO SAE J200, 2BC 414, A14, B14, C12, E014, F17, Z1
Z1=RESISTÊNCIA RASGO, ASTM D624 - 20kg/cm MIN.
- 2 - ELASTÔMERO SAE J200, 2BC 514, A14, B14, C12, E014, F17, Z1
Z1=RESISTÊNCIA RASGO, ASTM D624 - 20kg/cm MIN.
- 3 - ELASTOMERO SAE J 200M, 2GE, 405, A19, B37, EA14, E016, E036, F19, G11, Z1 Z1 = EXTERNAMENTE LUBRIFICADO 2%

- 1 - ELASTOMER SAE J200, 2BC 414, A14, B14, C12, E014, F17, Z1
Z1= TEAR RESISTANCE, ASTM D624 -20kg/cm MIN.
- 2 - ELASTOMER SAE J200, 2BC 514, A14, B14, C12, E014, F17, Z1
Z1= TEAR RESISTANCE, ASTM D624 -20kg/cm MIN.
- 3 - ELASTOMER SAE J 200M, 2GE, 405, A19, B37, EA14, E016, E036, F19, G11, Z1 Z1 = 2% LUBRIFICATED EXTERNALLY

OBSOLETE	PRETO/BLACK	40±5 SHORE A	SILICON 3	880811-3
	PRETO/BLACK	40±5 SHORE A	ELASTOMER 1	880811-2
	PRETO/BLACK	50±5 SHORE A	ELASTOMER 2	880811-1
	FINISH	HARDNESS	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.L. OGAWA 10JUN99		 TE Connectivity							
DIMENSIONS: mm		CHK P.L. FARIA 10JUN99									
		APVD J.M.M. NETO 10JUN99		NAME COVER CAP 3 POSN							
		PRODUCT SPEC -									
		APPLICATION SPEC -									
		WEIGHT -									
		CUSTOMER DRAWING									
MATERIAL SEE TABLE		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± ACCORDING 1 PLC ± DIN ISO 2 PLC ± 3302-1 3 PLC ± CLASS M2 4 PLC ± ANGLES ± FINISH SEE TABLE		SIZE A3		CAGE CODE 00779		DRAWING NO C-880811		RESTRICTED TO -	
				SCALE 2:1		SHEET 1		OF 1		REV DI	