

STANDARD RECOVERY DIODES

Stud Version

Features

- Diffused diode
- Wide current range
- High voltage ratings up to 1600V
- High surge current capabilities
- Stud cathode and stud anode version


Typical Applications

- Converters
- Power supplies
- Machine tool controls
- High power drives
- Medium traction applications

Major Ratings and Characteristics

Parameters	70/300U(R)..D	Units
$I_{F(AV)}$	250	A
	@ T_C	145 °C
$I_{F(RMS)}$	390	A
I_{FSM}	@ 50Hz	6550 A
	@ 60Hz	6850 A
I^2t	@ 50Hz	214 KA ² s
	@ 60Hz	195 KA ² s
V_{RRM} range	1200 to 1600	V
T_J	- 40 to 200	°C

250A

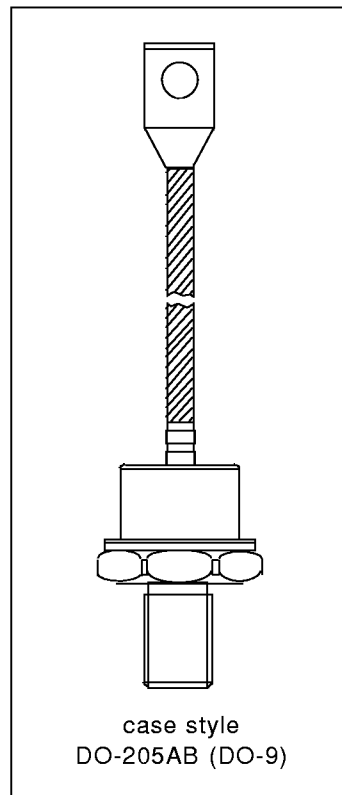

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V _{RRM} , maximum repetitive peak reverse voltage V	V _{RSM} , maximum non-repetitive peak rev. voltage V	I _{RRM} max. @ T _J = T _J max. mA
70/300U(R)..D	120	1200	1300	60
	160	1600	1700	

Forward Conduction

Parameter	70/300U(R)..D	Units	Conditions
I _{F(AV)} Max. average forward current @ Case temperature	250	A	180° conduction, half sine wave
	145	°C	
I _{F(RMS)} Max. RMS forward current	390	A	DC @ 134°C case temperature
I _{FSM} Max. peak, one-cycle forward, non-repetitive surge current	6550	A	t = 10ms No voltage
	6850		t = 8.3ms reapplied
	5500		t = 10ms 100% V _{RRM}
	5750		t = 8.3ms reapplied
I ² t Maximum I ² t for fusing	214	KA ² s	t = 10ms No voltage
	195		t = 8.3ms reapplied
	151		t = 10ms 100% V _{RRM}
	138		t = 8.3ms reapplied
I ² √t Maximum I ² √t for fusing	2140	KA ² √s	t = 0.1 to 10ms, no voltage reapplied
V _{F(TO)1} Low level value of threshold voltage	0.61	V	(16.7% × π × I _{F(AV)} < I < π × I _{F(AV)}), T _J = T _J max.
V _{F(TO)2} High level value of threshold voltage	0.83		(I > π × I _{F(AV)}), T _J = T _J max.
r _{f1} Low level value of forward slope resistance	0.75	mΩ	(16.7% × π × I _{F(AV)} < I < π × I _{F(AV)}), T _J = T _J max.
r _{f2} High level value of forward slope resistance	0.49		(I > π × I _{F(AV)}), T _J = T _J max.
V _{FM} Max. forward voltage drop	1.30	V	I _{pk} = 785A, T _J = 25°C, t _p = 10ms sinusoidal wave

Thermal and Mechanical Specifications

Parameter	70/300U(R)..D	Units	Conditions
T _J	Max. junction operating temperature range	-40 to 200	°C
T _{stg}	Max. storage temperature range	-40 to 200	
R _{thJC}	Max. thermal resistance, junction to case	0.18	K/W
R _{thCS}	Max. thermal resistance, case to heatsink	0.08	
T	Max. allowed mounting torque +0 -20%	37	Nm
		28	
wt	Approximate weight	250	g
	Case style	DO-205AB (DO-9)	See Outline Table

ΔR_{thJC} Conduction

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.020	0.015	K/W	T _J = T _J max.
120°	0.024	0.025		
90°	0.031	0.034		
60°	0.045	0.047		
30°	0.077	0.077		


Ordering Information Table

Device Code																			
	<table border="1" style="margin: auto;"> <tr> <td style="background-color: black; color: white;">300</td> <td style="background-color: black; color: white;">U</td> <td style="background-color: black; color: white;">F</td> <td style="background-color: black; color: white;">R</td> <td style="background-color: black; color: white;">160</td> <td style="background-color: black; color: white;">A</td> <td style="background-color: black; color: white;">Y</td> <td style="background-color: black; color: white;">P</td> <td style="background-color: black; color: white;">D</td> </tr> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">2</td> <td style="text-align: center;">3</td> <td style="text-align: center;">4</td> <td style="text-align: center;">5</td> <td style="text-align: center;">6</td> <td style="text-align: center;">7</td> <td style="text-align: center;">8</td> <td style="text-align: center;">9</td> </tr> </table>	300	U	F	R	160	A	Y	P	D	1	2	3	4	5	6	7	8	9
300	U	F	R	160	A	Y	P	D											
1	2	3	4	5	6	7	8	9											
1	- 300 = Standard 300U device 70 = Standard 70U device 302 = 300U Top Threaded version 72 = 70U Top Threaded version																		
2	- U = Essential Part Number																		
3	- F = Flat Base (with Pinch Bolt) None = Normal Stud																		
4	- R = Stud Reverse Polarity (Anode to Stud) None = Stud Normal Polarity (Cathode to Stud)																		
5	- Voltage code: Code x 10 = V _{RRM} (See Voltage Ratings table)																		
6	- A = Essential Part Number only for 300U Series None = 70U Series																		
7	- Y = European Lead None = Standard Lead																		
8	- P = Forward Selection (1.045V < V _{FM} < 1.125V, I _{FM} = 470A, T _J = 25°C)																		
9	- D = Diffused diode																		


70/300U(R)..D Series

Bulletin I2031 rev. A 01/97

Outline Table

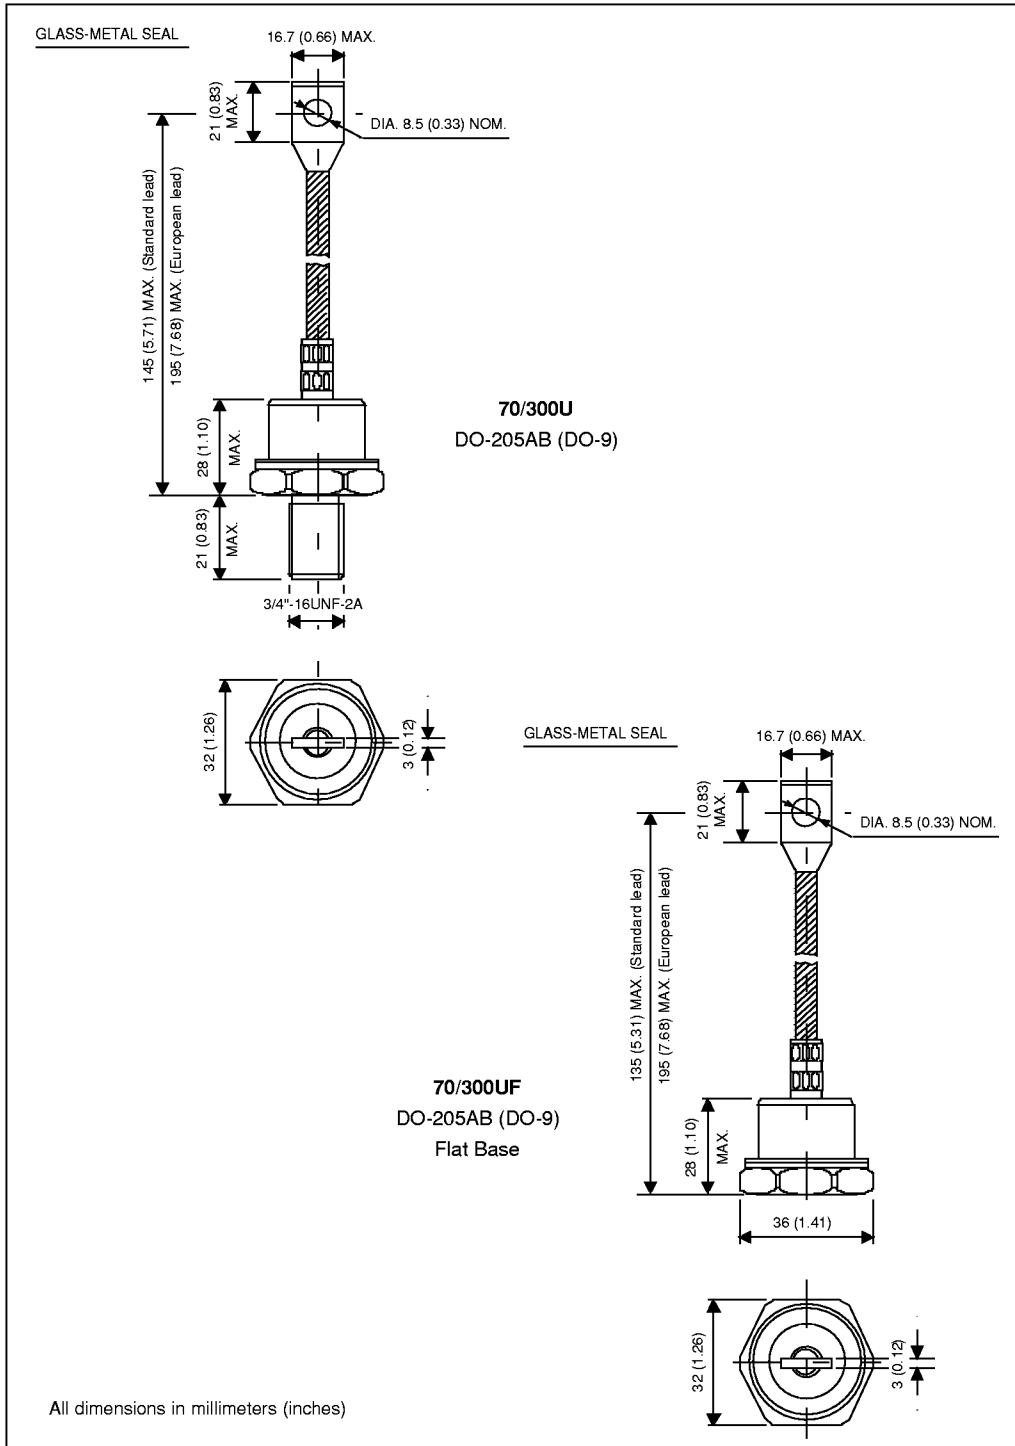

Outline Table

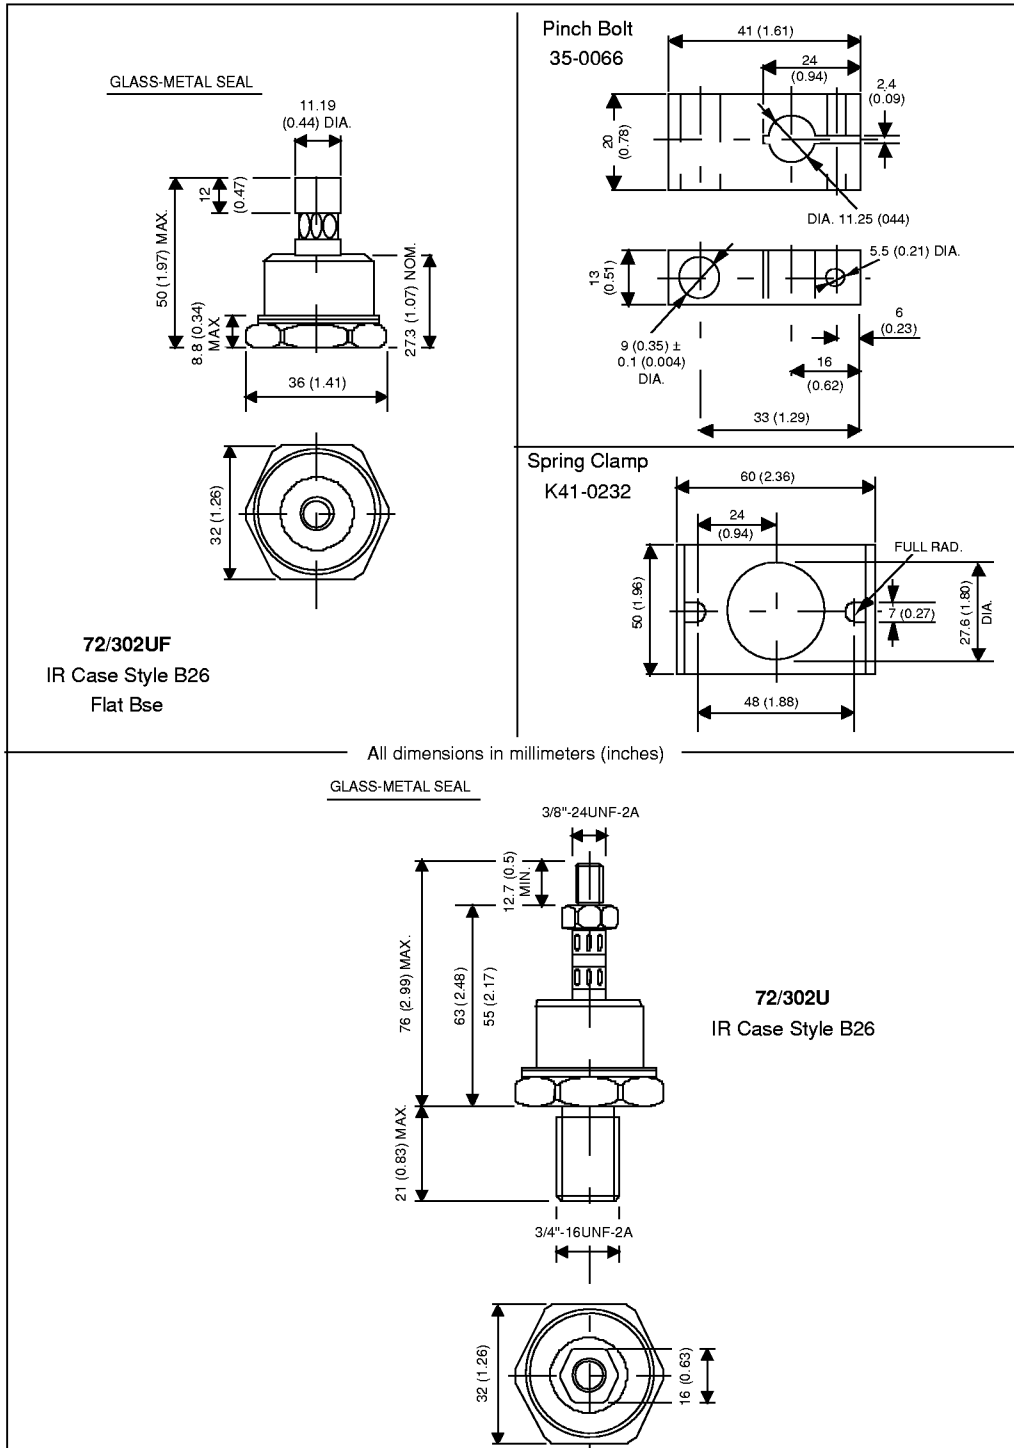

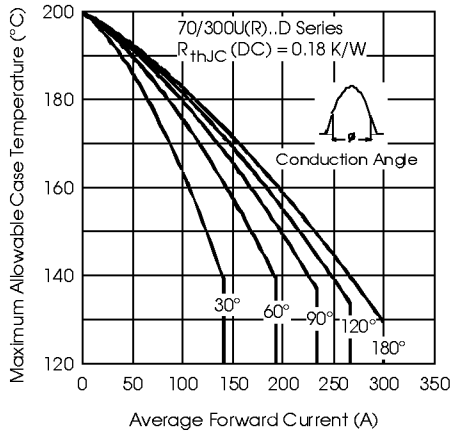


Fig. 1 - Current Ratings Characteristics

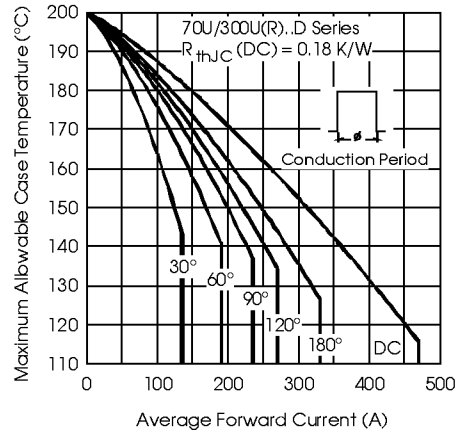


Fig. 2 - Current Ratings Characteristics

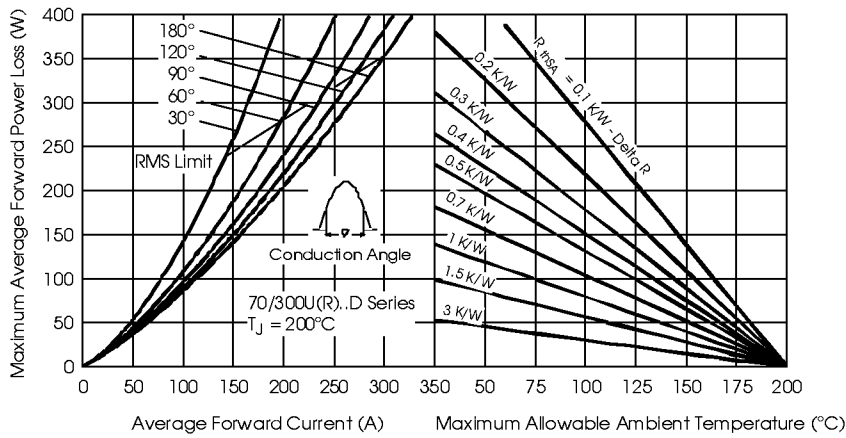


Fig. 3 - Forward Power Loss Characteristics

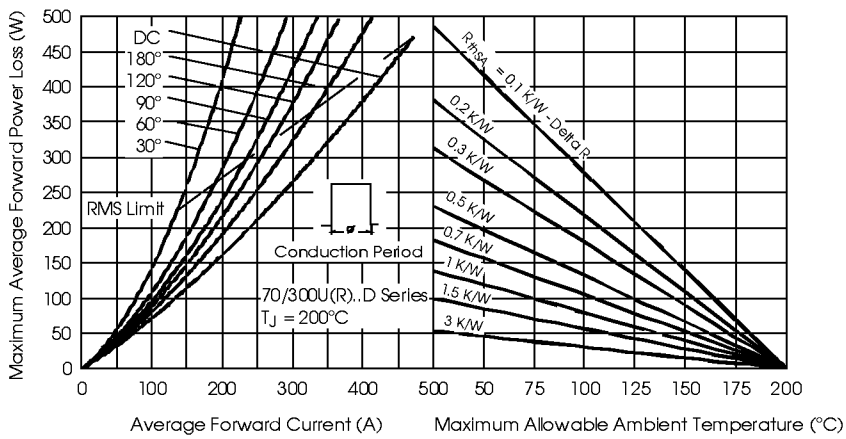


Fig. 4 - Forward Power Loss Characteristics

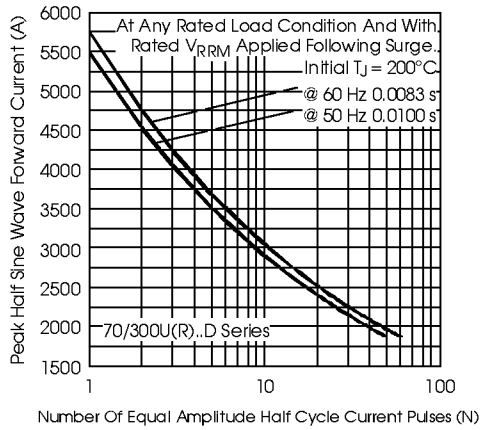


Fig. 5 - Maximum Non-Repetitive Surge Current

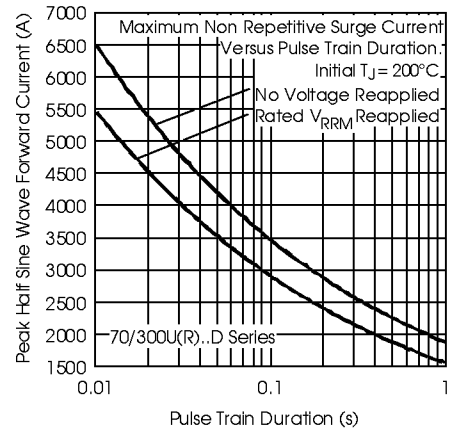


Fig. 6 - Maximum Non-Repetitive Surge Current

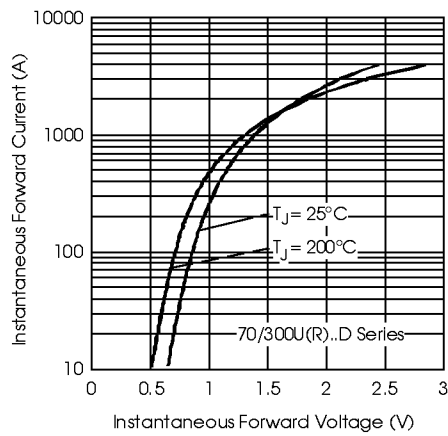


Fig. 7 - Forward Voltage Drop Characteristics

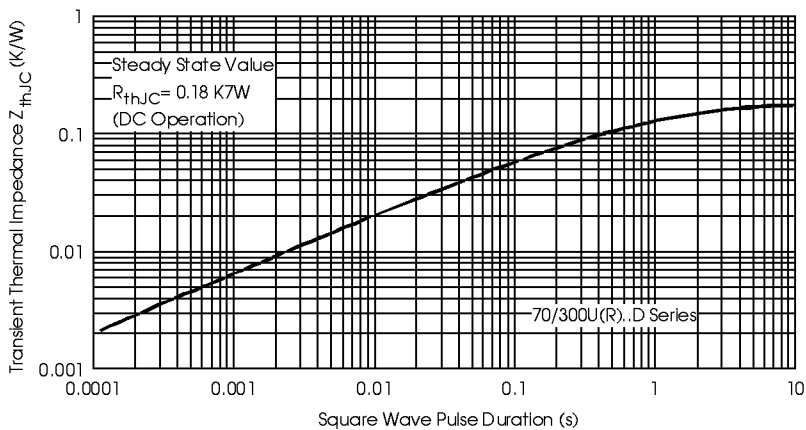


Fig. 8 - Thermal Impedance Z_{thJC} Characteristic