

<b>Specification</b>	<b>AXLE208</b>	Issue: 01	Date:2008-05-07
----------------------	----------------	-----------	-----------------

**Oscillator type : TCXO in CO15 package**

Parameter	min.	typ.	max.	Unit	Condition
<b>Frequency range</b>	6		190	MHz	(Clipped) Sinewave HCMOS
	1		800	MHz	
<b>Frequency stability</b>				ppm	
vs. temperature	± 0.5 ppm to ± 5 ppm			ppm	See tables 1 & 2
vs. supply voltage variation		± 0.1	± 0.3	ppm	
vs. load change			± 0.2	ppm	± 10 %
long term (aging) per year			± 1	ppm	@+40°C
<b>Frequency adjustment range</b>					
Mechanical (internal trimmer)	± 3			ppm	Option 1 = blank
Electronic Frequency Control (EFC)	± 5			ppm	Option 1 = "V"
EFC voltage $V_C$	0.15	1.65	3.15	V	Option 2 = "3"
	0.5	2.5	4.5	V	Option 2 = "5"
EFC slope ( $\Delta f / \Delta V_C$ )	positive				
EFC input impedance	100			k $\Omega$	
<b>RF output</b>					
Signal waveform	Sine wave Clipped Sine wave HCMOS				Option 3 = "S" Option 3 = "C" Option 3 = "H"
Load	50 $\Omega$ 10 k $\Omega$    10 pF 15 pF				Option 3 = "S" Option 3 = "C" Option 3 = "H"
Amplitude		0		dBm	Option 3 = "S" / 3.3 V
	0.8	+10		dBm	Option 3 = "S" / 5.0 V
	1.0			V p-p	Option 3 = "C" / 3.3 V
	According to relevant Logic Standard			V p-p	Option 3 = "C" / 5.0 V
<b>Supply voltage <math>V_S</math></b>	3.15	3.3	3.45	V	Option 2 = "3"
	4.75	5.0	5.25	V	Option 2 = "5"
<b>Current consumption</b> (Note 3)	12 ~ 30			mA	Option 3 = "S"
	2 ~ 30			mA	Option 3 = "C"
	15 ~ 50			mA	Option 3 = "H"
<b>Storage temperature range</b>	-45		+90	°C	
<b>Enclosure (see drawing)</b>	20.3 x 20.3 x 5.3 max.			mm	IEC 60679-3 CO-15
<b>Marking</b>	AXLE208 Freq wwAXPyy				Specification Frequency ww=week, yy=year
<b>Packing</b>	Palette				
<b>Construction</b>	Lead(Pb) -free				

**Notes:**

1. Terminology and test conditions are according to IEC standard IEC60679-1, unless otherwise stated
2. All combinations of options might not be available. Please consult factory
3. Depending on frequency and supply voltage

## Frequency Stability over Temperature

Table 1

Code4	Stability
05	± 0.5
10	± 1.0
15	± 1.5
20	± 2.0
25	± 2.5
30	± 3.0
35	± 3.5
50	± 5.0

Table 2


Lower Temperature		Upper Temperature	
Code5	Temp/°C	Code5	Temp/°C
0	0	A	+50
1	-10	B	+60
2	-20	C	+70
3	-30	D	+75
4	-40	E	+80
		F	+85

## Ordering Code:

Part number	Option 1	Option 2	Option 3	Option 4	Option 5
	EFC	Supply Voltage	Output	Stability	Temp. range
AXLE208	_ or "V"	5 or 3	S, C, H	See tables 1 & 2	

Example: AXLE208V-5-S-10-3D

## Enclosure drawing

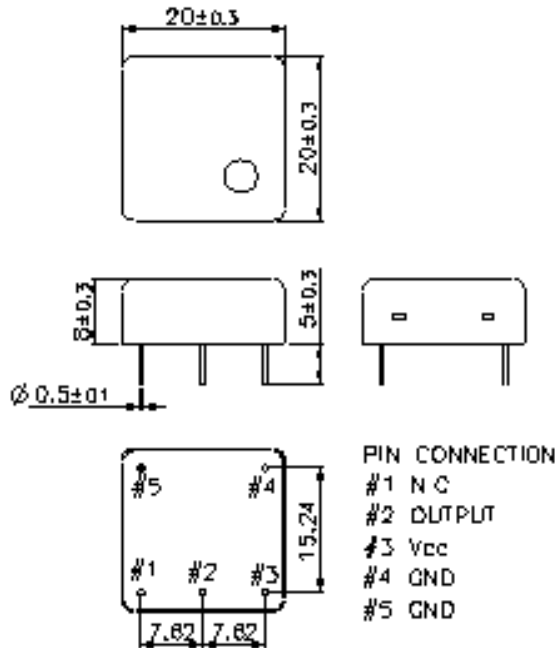

## Pin connections

Pin #	Symbol	Function
1	N.C. or $V_C$	No Connection or Control Voltage (EFC)
2	RF OUT	RF Output
3	$V_s$	Supply Voltage
4	GND	Ground
5	GND	Ground