
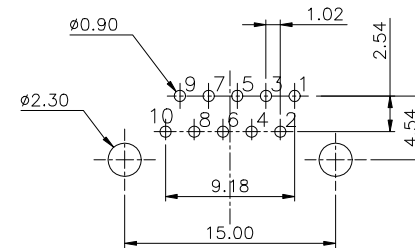
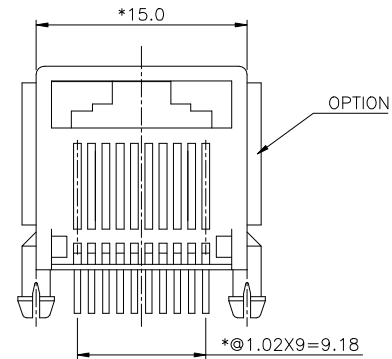
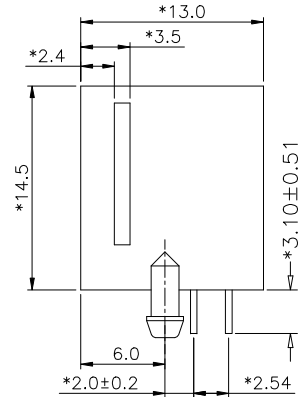


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
▲		add new p/n	Xlf 6/09/04*	

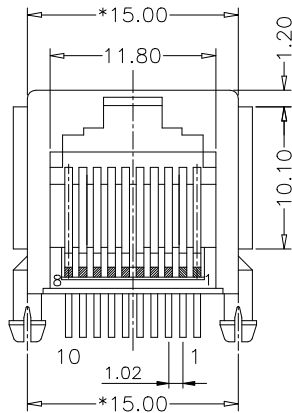

PC Board Layout Component Side Shown

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E550X-60LXXX

NO. OF CONTACT:	1- 3u"	2- 6u" F-Glod Flash ▲
2- 2C 4- 4C	3- 15u"	4- 30u"
6- 6C 8- 8C	5- 50u"	6- Pd 20u"
1- 10C	1-W/ PANEL STOP	2-W/O PANEL STOP
0-A06-0100 BK.		
1-A06-0110 GY.		

DETACHED LISTS	MM (INCH)	DFTO WLQ	DATE 4/29/99'	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD QIANPU	DATE 2004/6/21		
	MM	MFO	DATE	TITLE MINI L/P 10P	
	.0 ±0.20 ±	APPV L SAMMY	DATE 2004/6/21		
.00 ±0.15 ±	MATERIAL :	QTY :	DRAWING NO. GE553019	SIZE A3	REV 1
.000 ±0.075 ±	ANGLES ±	FINISH :	/PART NO. SEE NOTE	SHEET X OF Y	
THIRD ANGLE PROJECTION		SCALE :	DO NOT SCALE DRAWING		