FEMALE FACE VIEW



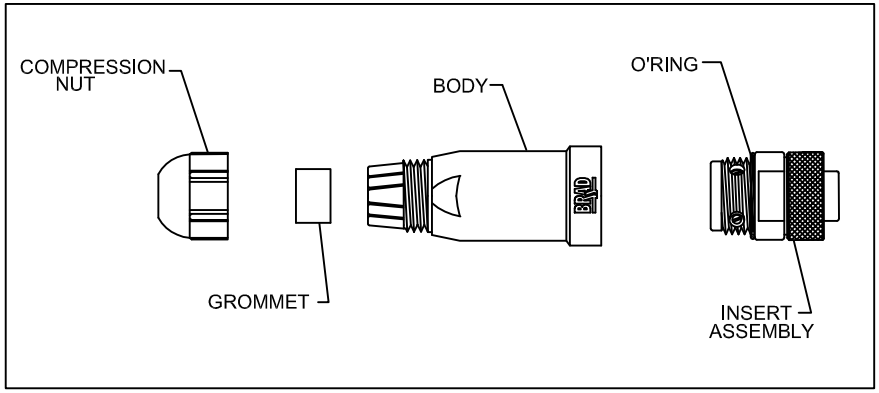

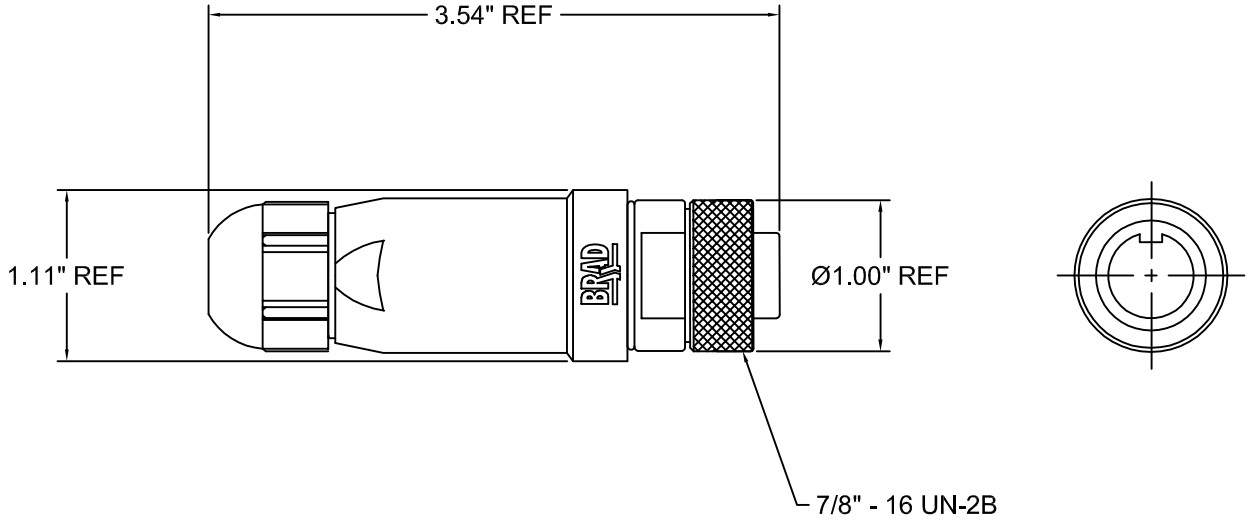

SPECS:
BODY: POLYAMIDE PA6 (BLACK)
INSERT: BLACK PUR
COUPLING NUT: NICKEL-PLATED BRASS
CABLE O.D RANGE: 0.20" - 0.48"
TERMINATION: SCREW
ACCEPTABLE WIRE GAUGE: 14AWG - 24AWG
ELECTRICAL: 600V AC/DC, 8A
TEMPERATURE: -40°C to 80°C

REFERENCE USE ONLY

MATERIAL NUMBER	ENGINEERING NUMBER
1300170015	1A4000-34

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
4 PLACES		
3 PLACES		
2 PLACES		
1 PLACE		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DESCRIPTION
REV

DIMENSION STYLE
SCALE
DESIGN UNITS
THIRD ANGLE PROJECTION

DRAWN BY RB DATE
CHECKED BY --- DATE ---
APPROVED BY --- DATE ---

TITLE
BRAD CONNECTIVITY
MINI-CHANGE FIELD-ATTACHABLE
4POLE FEMALE STRAIGHT

molex MOLEX INCORPORATED

MATERIAL NO. 1300170015
DOCUMENT AEP DIVISION
SHEET NO. 1 OF 1

SIZE C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION