



Bidirectional Surface Mount THYZORB® Thyristor Overvoltage Protectors

DO-214AA (SMB)



Symbol



Stand-off Voltage 56 to 243V
Breakover Voltage 80 to 350V
Peak Pulse Current 50A (10/1000µs)
Holding Current 150mA minimum

Mechanical Data

Case: JEDEC DO-214AA molded plastic body over passivated junction

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed:
250°C/10 seconds at terminals

Mounting Position: Any

Weight: 0.003 ounces, 0.093 gram

Features

- Bidirectional crowbar protection
- Complies with Bellcore TR-NWT-001089, and IEC-1000-4-5 standards
- Series is designed to protect telecommunication equipment against lightning and AC induced transients
- Plastic package has UL Flammability Classification 94V-0
- Low profile package with built-in strain relief for surface mounted applications

Maximum Ratings and Thermal Characteristics T_A = 25°C unless otherwise noted.

Parameter	Symbol	Value	Unit
Power Dissipation	T _L = 50°C	5	W
Peak Pulse Current	10/1000µs 8/20µs	50 200	A
Non-repetitive surge peak on-state current	t _p = 20ms	30	A
Critical rate of rise of off-state voltage (V _{RM})	dV/dt	5	KV/µs
Storage temperature range	T _{stg}	-55 to +150	°C
Maximum junction temperature	T _j	150	°C
Thermal resistance junction to leads	R _{θJL}	20	°C/W
Thermal resistance junction to ambient on P.C.B. with recommended pad layout	R _{θJA}	100	°C/W

I_{PP} Ratings for the Following Surge Standards:


Standard	Waveform	I _{PP}
GR-1089-CORE	2/10µs	300A ⁺
IEC61000-4-5	8/20µs	200A ⁺
FCC Part 68	10/160µs	120A ⁺
ITU-TK20/21	10/700µs	100A ⁺
FCC Part 68	10/560µs	75A ⁺
GR-1089-CORE	10/1000µs	50A

Values with ⁺ have improved I_{PP} specs over equivalent competitor part numbers

Electrical Characteristics (T_A = 25°C unless otherwise noted)


Type	Device Marking Code	Maximum I _R @ V _R	V _R	Stand-off Voltage V _{DRM} (V)	Max. Reverse Leakage at V _{DRM} I _{DRM} (μA)	Maximum Breakover Voltage V _{BO} (V) ⁽¹⁾⁽³⁾	Maximum Breakover Current I _{BO} (mA) ⁽¹⁾	Minimum Holding Current I _H (mA)	Typical Capacitance C (pF) ⁽²⁾
SMTPA62	U01	50	62	56	2.0	80*	800	150	70
SMTPA68	U05	50	68	61	2.0	90	800	150	68
SMTPA100	U13	50	100	90	2.0	125*	800	150	55
SMTPA120	U17	50	120	108	2.0	145*	800	150	50
SMTPA130	U19	50	130	117	2.0	165*	800	150	50
SMTPA180	U25	50	180	162	2.0	240	800	150	40
SMTPA200	U27	50	200	180	2.0	265*	800	150	40
SMTPA220	U31	50	220	198	2.0	290*	800	150	40
SMTPA240	U35	50	240	216	2.0	320	800	150	40
SMTPA270	U39	50	270	243	2.0	350*	800	150	40

- Notes:** (1) $dv/dt \leq 2V/\mu s$
 (2) $V_R = 2V, f = 1MHz$
 (3) Values with * have improved V_{BO} specs over equivalent competitor part numbers

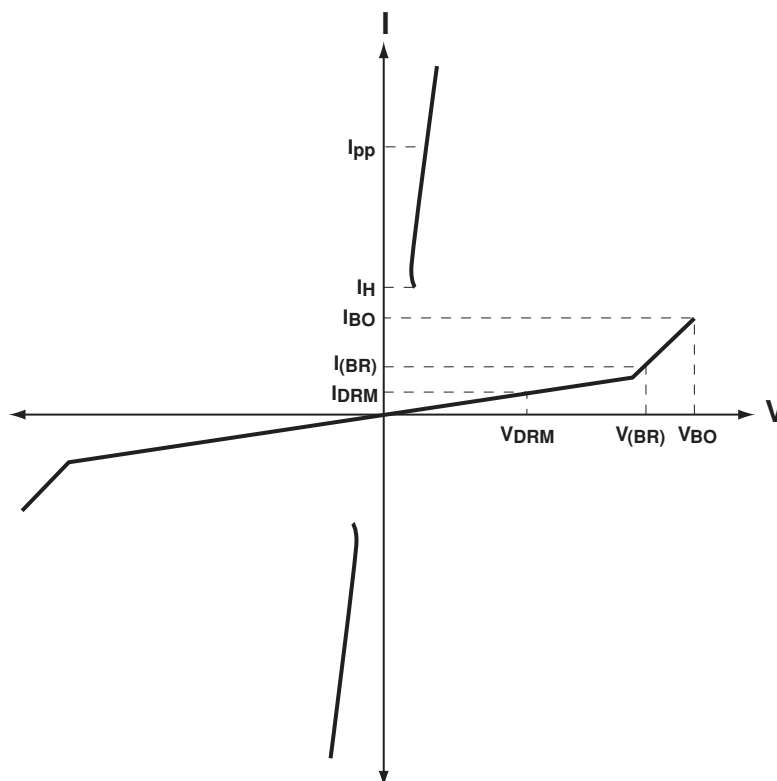




DO-214AA (SMB)

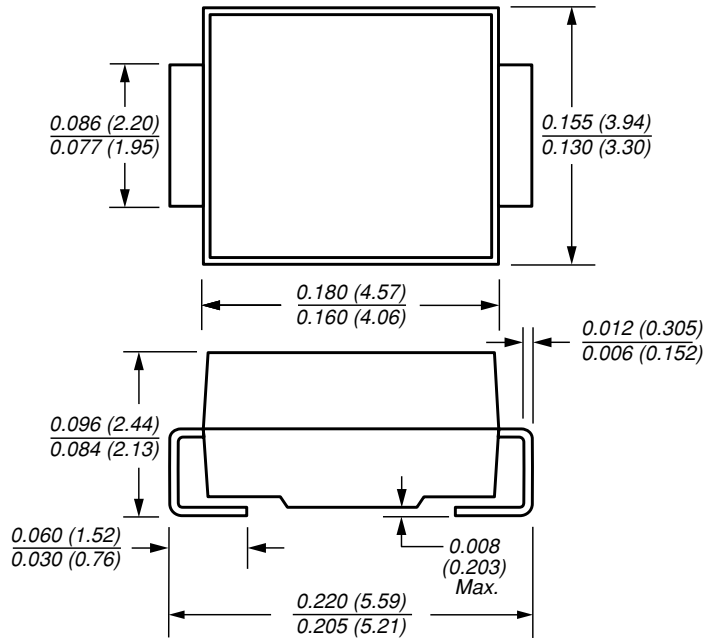

Mounting Pad Layout

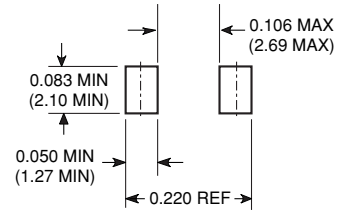

Dimensions in inches
and (millimeters)



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.