



SMT POWER INDUCTORS

Wire Wound

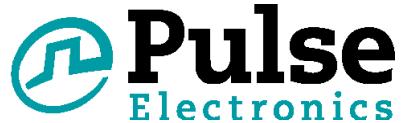

- **Height:** 12.2mm Max
- **Footprint:** 22.2 x 19.1mm Max
- **Current Rating:** Over 22Apk
- **Inductance Range:** 5.8 μ H to 57 μ H
- **Weight:** \pm 4%

Electrical Specifications @ 25°C — Operating Temperature -55°C to +130°C

Part Number	Inductance @0ADC (μ H \pm 10%)	Inductance @Irated (μ H TYP)	Irated ¹ (A _{DC})	DCR (mΩ \pm 10%)	Saturation ² Current Isat (A TYP)		Heating ³ Current I _{HC} (A TYP)	Core Loss Factor K2
					25°C	100°C		
PA2050.582NL	5.8	5.8	14.4	4.4	22	17	14.4	155
PA2050.782NL	7.8	7.8	13.3	5.1	18	16	13.3	181
PA2050.103NL	10.2	10.2	12.5	5.8	16	15	12.5	206
PA2050.163NL	16.0	16.0	9.9	9.1	12	11	9.9	258
PA2050.193NL	19.4	19.4	8.5	12.6	11	10	8.5	284
PA2050.233NL	23.0	23.0	8.0	13.7	9.8	8	8.1	310
PA2050.273NL	27.0	26.2	7.8	14.9	9	8	7.8	335
PA2050.313NL	31.4	30.6	6.7	20.2	8.4	8	6.7	361
PA2050.363NL	36.0	35.2	6.0	21.6	8	6	6.5	387
PA2050.393NL	38.9	37.5	6.0	18.8	6.3	6	6.2	482
PA2050.413NL	41.0	40.0	6.0	23.1	7.3	6	6.2	413
PA2050.583NL	57.8	57.8	5.0	34.5	6.2	5	5.1	490

Notes:

1. The rated current as listed is either the saturation current or the heating current depending on which value is lower.
2. The saturation current is the typical current which causes the inductance to drop by 20% at the stated ambient temperatures (25°C and 100°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
3. The heating current is the DC current which causes the part temperature to increase by approximately 40°C.

4. In high volt*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. To determine the approximate total losses (or temperature rise) for a given application, the coreloss and temperature rise formula can be used:

$$\Delta B (\text{Gauss}) = K2 * \Delta I$$


$$\text{Core Loss (W)} = 1.5E-13 * (\text{Freq}_\text{kHz})^{1.63} * \Delta B^{2.62}$$

5. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.

6. Add "T" suffix to the part number for Tape & Reel version (i.e. PA2050.582NLT).





SMT POWER INDUCTORS

Wire Wound

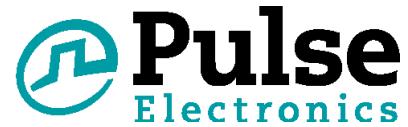


Mechanicals

PE-65612NL

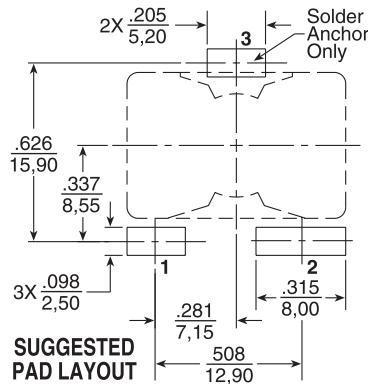


Dimensions: *Inches*
mm


Unless otherwise specified, all
tolerances are $\pm .010$
 $.025$



Temp Rise vs Power Dissipation

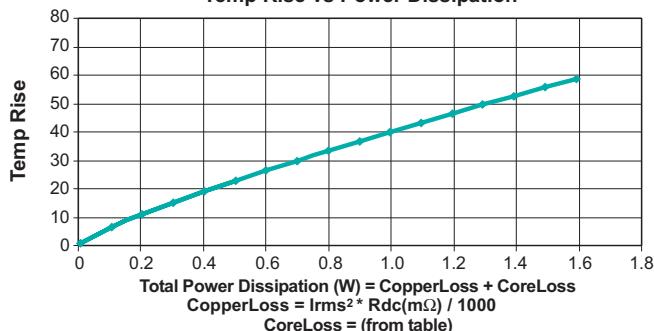


Inductance vs Current Characteristics

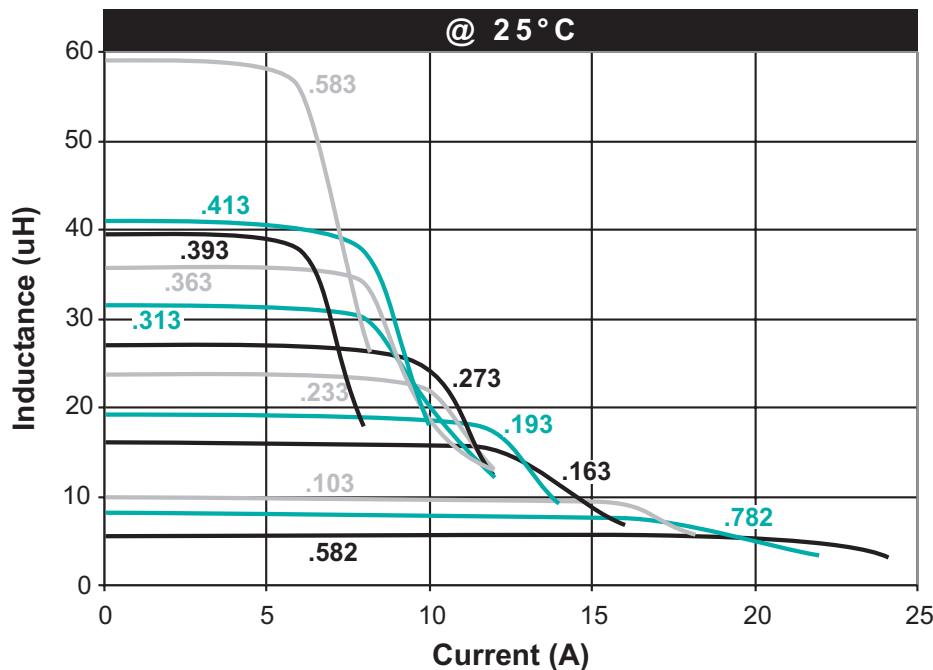

SMT POWER INDUCTORS

Wire Wound

Inductance vs Current Characteristics (continued)

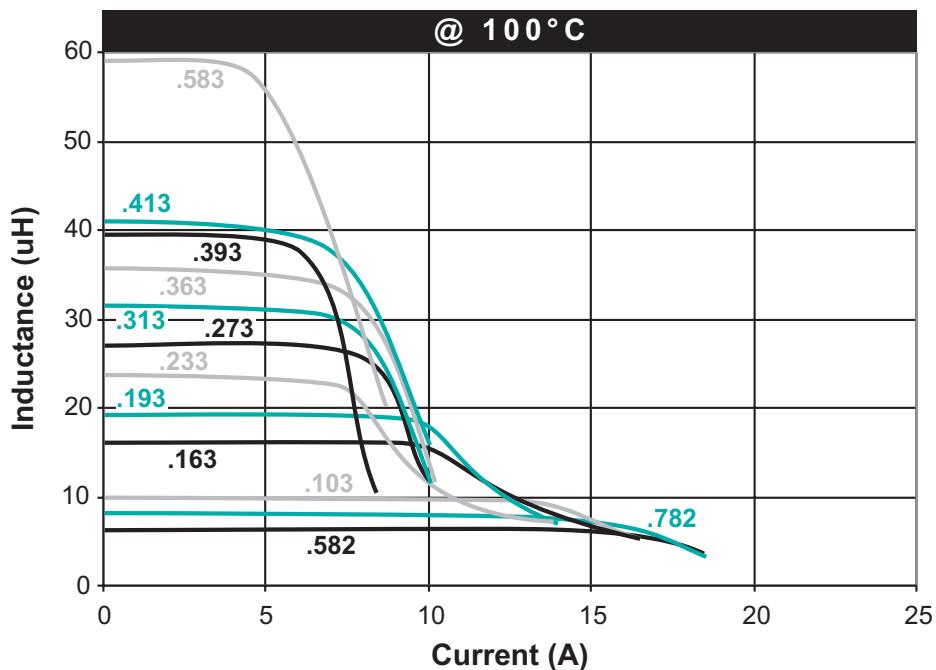

For More Information

**Pulse North America
Headquarters**
Two Pearl Buck Court
Bristol, PA 19007
U.S.A.

Tel: 215 781 6400
Fax: 215 781 6403

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 7806

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057

Pulse North China
Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363
Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823
(Pulse)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2013. Pulse Electronics, Inc. All rights reserved.