


## Typ ST29..

- 7,62 mm pin spacing
- 2 .. 16-poles single mold
- vertical header
- selective loading possible
- not to be connected or disconnected under electrical load
- open end

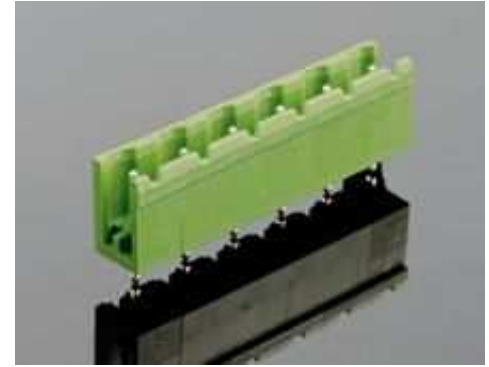

	<b>cULus</b>	<b>VDE</b>
Rated voltage	300 V	400 V
Rated current	15 A	12 A
Rated impulse voltage		6 kV
Pollution degree		3
<b>Dimensions</b>	Spacing	7,62 mm
	PCB hole diameter	1,4 mm
<b>Materials</b>	Insulating material	PA
	Flammability class	UL 94 V-0
	Temperature range	-30 °C/+105 °C
	Contact pin	Cu
<b>Colour</b>	RAL 6018	green

### Dimensions

