


(2,00mm) .0787"

ETMM, TLMM SERIES

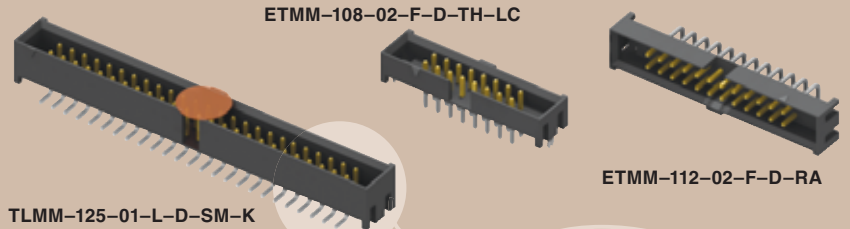

SHROUDED STRAIN RELIEF IDC HEADER

SPECIFICATIONS

For complete specifications see www.samtec.com?ETMM or www.samtec.com?TLMM

Insulator Material:
Black Liquid Crystal Polymer (ETMM)
High Temp Nylon (TLMM)
Terminal Material:
Phosphor Bronze
Plating:
Sn or Au over 50µ" (1,27µm) Ni
Current Rating:
3A @ 80°C ambient
Operating Temp Range:
-55°C to +125°C
RoHS Compliant:
Yes


Processing:
Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
(0,13mm) .005" max
RoHS Compliant:
Yes

Mates with:
TLSD, TCSD, TCMD

Shrouded pins for protection

ALSO AVAILABLE

Contact Samtec for other sizes.
See STMM Series for TCSD mates without Strain Relief.
See LTMM for shrouded header for mating with Connector Strips.

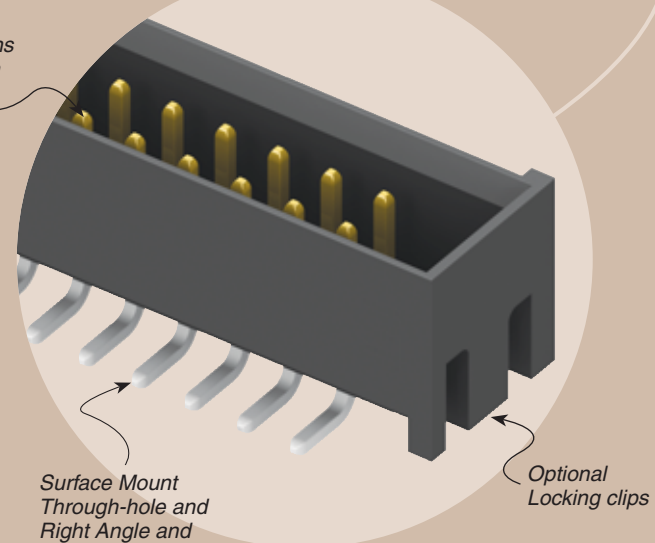

TYPE STRIP	NO. OF POSITIONS	LEAD STYLE	PLATING OPTION	BODY HEIGHT	OTHER OPTION
1	05, 08, 10, 12, 13, 15, 17, 20, 22, 25 (Call for other sizes)	-01 = TLMM -02 = ETMM	-F = Gold Flash on post, Matte Tin on tail -L = 10µ" (0,25µm) Gold on post, Matte Tin on tail	-TH = Through-hole -RA = Right Angle -SM = Surface Mount	-“XX” = Polarized Position -LC = Locking Clip (Not available for -RA) (Manual placement required) -TR = Tape & Reel Packaging (-SM only) -K = (7,50mm) .295" DIA Polyimide Film Pick & Place Pad (-SM only)

TYPE STRIP	A
ETMM	No. of positions x (2,00) .0787 + (9,97) .393
TLMM	No. of positions x (2,00) .0787 + (7,37) .290

TYPE STRIP	B	C	D	E	F	G
ETMM	(6,54) .257	(4,83) .190	(2,97) .117	(1,52) .060	(2,29) .090	(6,10) .240
TLMM	(6,60) .260	(6,99) .275	(2,29) .090	(1,27) .050	(2,05) .081	(8,26) .325

Note: Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM