

< Power GaAs FET >

MGF1941AL

Micro-X type plastic package

DESCRIPTION

The MGF1941AL power MES FET is designed for use in S to Ku band power amplifiers.

FEATURES

High gain and High P1dB
P1dB=15dBm, Glp=10 dB (Typ.) @ f=12GHz

APPLICATION

S to Ku band low noise amplifiers

QUALITY GRADE

GG

RECOMMENDED BIAS CONDITIONS

VDS=3V, ID=30mA

ORDERING INFORMATION

Tape & reel 4,000pcs/reel

RoHS COMPLIANT

MGF1941AL is a RoHS compliant product. RoHS compliance is indicated by the letter "G" after the Lot Marking.

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Symbol	Parameter	Ratings	Unit
VGDO	Gate to drain voltage	-5	V
VGSO	Gate to source voltage	-5	V
ID	Drain current	120	mA
PT	Total power dissipation	300	mW
Tch	Channel temperature	175	°C
Tstg	Storage temperature	-65 to +150	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			MIN.	TYP.	MAX	
V(BR)GDO	Gate to drain breakdown voltage	IG=-30μA	-8	-15	--	V
IDSS	Saturated drain current	VGS=0V, VDS=3V	35	60	120	mA
VGS(off)	Gate to source cut-off voltage	VDS=3V, ID=300μA	-0.3	-1.4	-3.5	V
P1dB	Output power at 1dB gain compression	VDS=3V, ID=30mA, f=12GHz	11	15	--	dBm
Glp	Linear power gain	VDS=3V, ID=30mA, f=12GHz, Pin=-5dBm	7	10	--	dB
Gs	Associated gain	VDS=3V, ID=10mA, f=12GHz	--	9	--	dB
NFmin	Minimum noise figure		--	1.2	--	dB

Note : P1B and Glp are tested with sampling inspection.
Gs/NFmin are not tested.






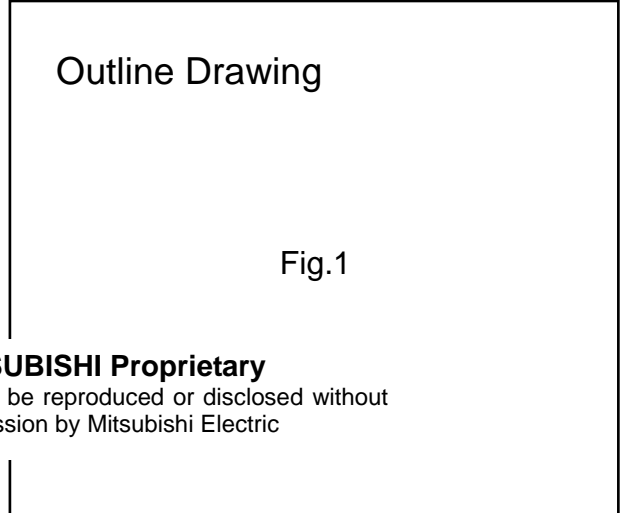


Fig.1

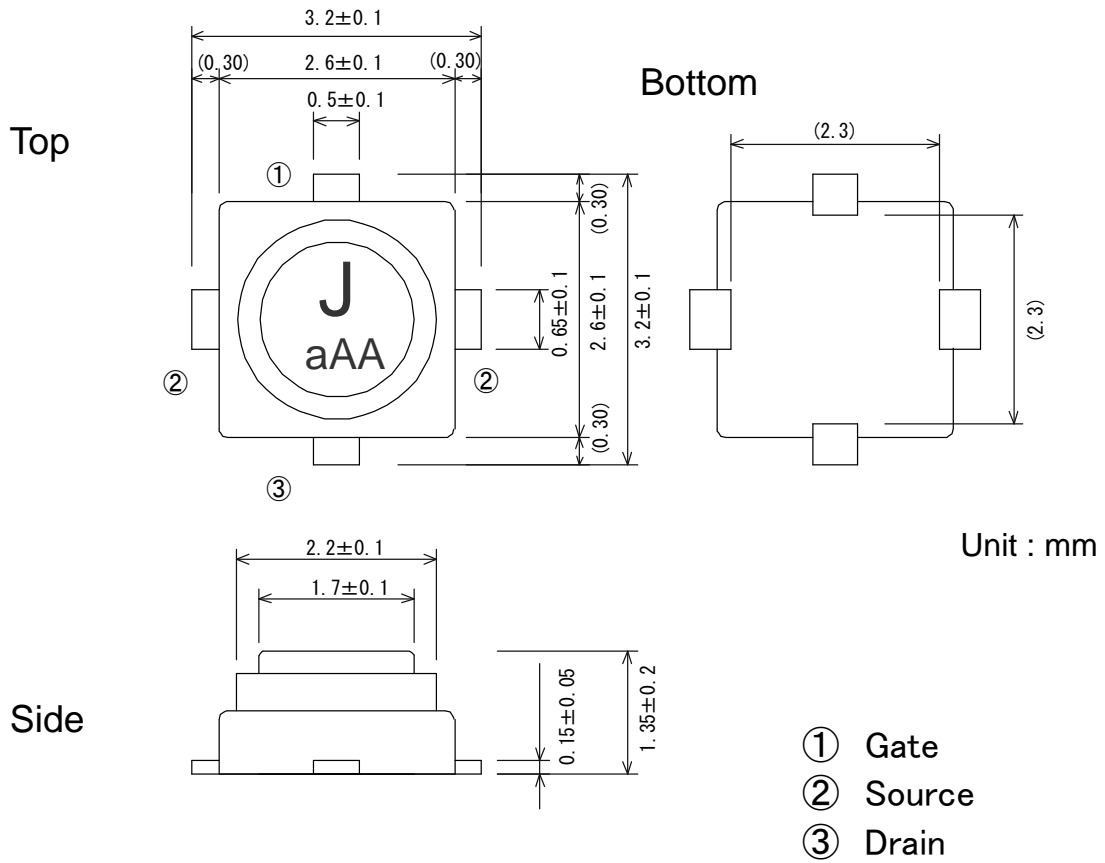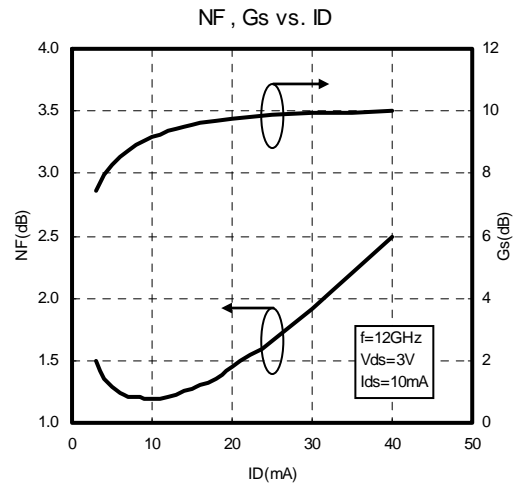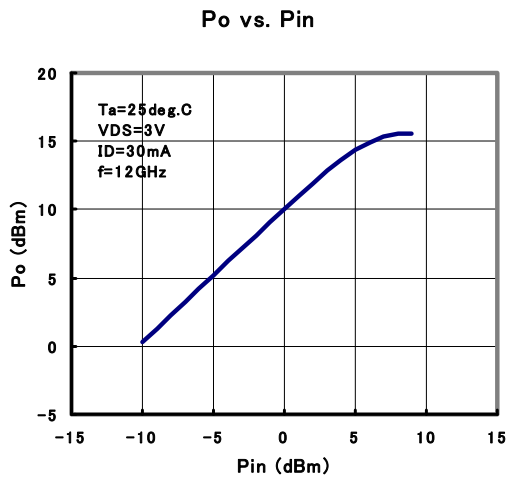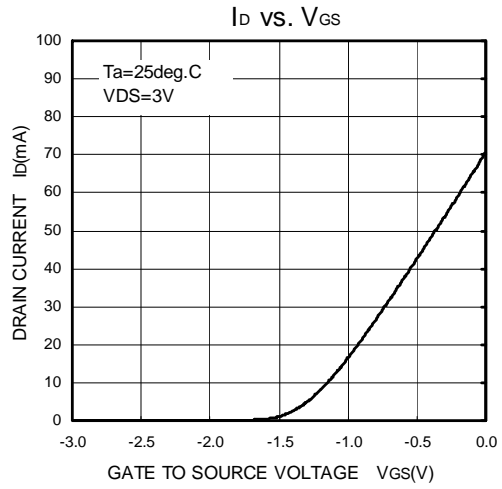

(GD-32)


TYPICAL CHARACTERISTICS (Ta=25°C)

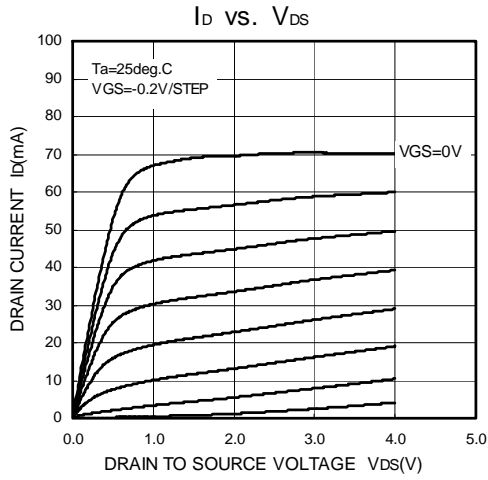

S PARAMETERS

(Conditions: VDS=3V, ID=30mA, Ta=25deg.C)

f (GHz)	S11		S21		S12		S22		K	MAG/MSG (dB)
	Mag.	Angle	Mag.	Angle	Mag.	Angle	Mag.	Angle		
1	0.981	-20.3	5.081	159.6	0.016	78.2	0.567	-11.2	0.21	25.0
2	0.933	-40.4	4.936	140.0	0.031	67.1	0.549	-22.2	0.38	22.0
3	0.862	-60.6	4.742	120.8	0.045	56.7	0.520	-32.9	0.54	20.3
4	0.780	-81.1	4.509	102.2	0.056	47.1	0.482	-43.4	0.70	19.1
5	0.694	-102.4	4.265	84.0	0.066	38.0	0.440	-53.8	0.85	18.1
6	0.610	-124.3	3.982	66.6	0.073	30.2	0.394	-63.2	1.00	17.4
7	0.547	-149.6	3.689	49.0	0.079	22.2	0.340	-76.0	1.12	14.6
8	0.499	-174.0	3.389	32.7	0.083	14.8	0.288	-87.7	1.27	13.0
9	0.480	162.9	3.117	17.6	0.087	9.4	0.243	-100.4	1.37	11.9
10	0.480	142.0	2.904	3.5	0.091	5.7	0.209	-114.9	1.43	11.1
11	0.505	123.1	2.720	-10.8	0.098	1.6	0.185	-135.0	1.39	10.7
12	0.548	106.4	2.569	-25.2	0.107	-3.6	0.177	-162.1	1.29	10.6
13	0.588	90.2	2.393	-39.4	0.113	-10.5	0.176	168.8	1.24	10.3
14	0.633	76.4	2.277	-53.3	0.122	-16.3	0.215	147.8	1.11	10.7
15	0.670	62.2	2.142	-69.1	0.131	-24.9	0.287	125.6	1.00	11.8
16	0.722	53.0	1.968	-84.2	0.135	-33.3	0.354	103.6	0.90	11.6
17	0.761	41.1	1.799	-98.6	0.140	-40.8	0.423	88.8	0.82	11.1
18	0.788	30.8	1.614	-113.4	0.143	-49.7	0.506	74.5	0.74	10.5

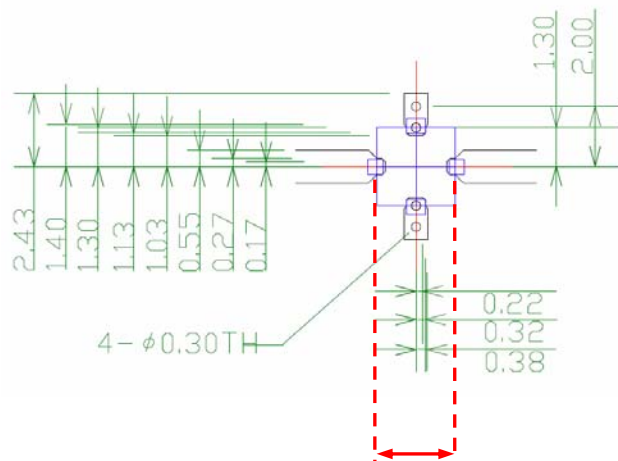


Measurement plane (2.6mm)

Recommended foot pattern;
 RO4003C/Rogers ($\epsilon_f=3.38$, $t=0.508\text{mm}$)

S PARAMETERS

(Conditions: VDS=3V, ID=10mA, Ta=25deg.C)

f (GHz)	S11		S21		S12		S22		K	MAG/MSG (dB)
	Mag.	Angle	Mag.	Angle	Mag.	Angle	Mag.	Angle		
1	0.988	-17.8	3.647	161.6	0.019	77.8	0.625	-11.5	0.16	22.8
2	0.955	-35.7	3.602	143.8	0.038	66.0	0.609	-23.0	0.29	19.8
3	0.907	-54.0	3.549	125.9	0.054	54.5	0.581	-34.5	0.41	18.1
4	0.845	-73.0	3.478	108.0	0.069	43.2	0.544	-46.1	0.54	17.0
5	0.776	-92.9	3.394	90.2	0.081	32.1	0.498	-57.9	0.66	16.2
6	0.698	-113.8	3.266	72.6	0.090	21.8	0.445	-69.2	0.81	15.6
7	0.629	-138.1	3.101	54.1	0.096	11.1	0.384	-83.6	0.95	15.1
8	0.570	-161.9	2.904	37.0	0.098	1.1	0.325	-97.2	1.12	12.6
9	0.535	174.6	2.706	21.0	0.097	-6.2	0.272	-111.8	1.29	11.2
10	0.522	153.1	2.535	5.8	0.094	-10.7	0.234	-127.8	1.45	10.3
11	0.534	132.8	2.382	-9.3	0.095	-13.9	0.211	-148.2	1.51	9.8
12	0.568	114.5	2.249	-24.4	0.099	-17.3	0.207	-173.7	1.46	9.6
13	0.604	97.1	2.091	-39.2	0.101	-22.4	0.212	159.9	1.44	9.2
14	0.642	82.1	1.981	-53.6	0.107	-25.9	0.250	140.7	1.32	9.3
15	0.673	67.1	1.844	-69.7	0.114	-32.4	0.322	120.7	1.20	9.4
16	0.724	57.1	1.685	-84.9	0.118	-39.5	0.386	99.9	1.06	10.0
17	0.761	44.9	1.531	-99.4	0.122	-45.4	0.450	85.7	0.96	11.0
18	0.787	34.2	1.364	-114.1	0.126	-53.4	0.528	72.0	0.86	10.3

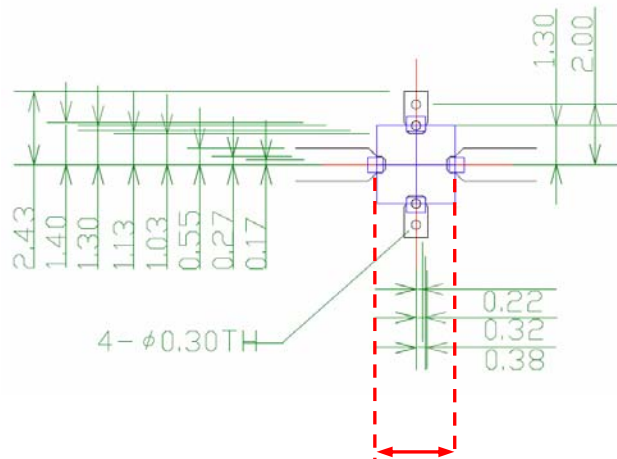

Measurement plane (2.6mm)

Recommended foot pattern;
 RO4003C/Rogers ($\epsilon_f=3.38$, $t=0.508\text{mm}$)

Keep safety first in your circuit designs!

- Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors.
Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Semiconductor home page (<http://www.mitsubishielectric.com/>).
- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.