

Silicon NPN Power Transistors

2N5869 2N5870

DESCRIPTION

- With TO-3 package
- Low collector saturation voltage

APPLICATIONS

- For medium-speed switching and amplifier applications

PINNING

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

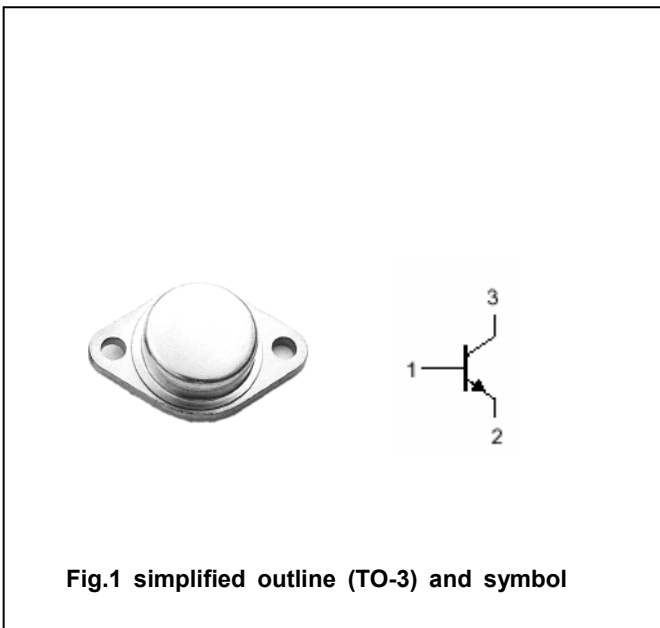


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings(Ta=□)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	2N5869	60	V
		2N5870	80	
V _{CEO}	Collector-emitter voltage	2N5869	60	V
		2N5870	80	
V _{EBO}	Emitter-base voltage	Open collector	5	V
I _C	Collector current		5	A
P _D	Total Power Dissipation	T _C =25□	87.5	W
T _j	Junction temperature		150	□
T _{stg}	Storage temperature		-65~200	□

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
R _{th j-c}	Thermal resistance junction to case	1.17	□/W

Silicon NPN Power Transistors

2N5869 2N5870

CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT	
V _{CEO(SUS)}	Collector-emitter sustaining voltage	2N5869	I _C =0.1A ; I _B =0	60			V
		2N5870		80			
V _{CEsat}	Collector-emitter saturation voltage	I _C =5A; I _B =1A			1.0	V	
V _{BEsat}	Base-emitter saturation voltage	I _C =5A; I _B =1A			1.5	V	
I _{CBO}	Collector cut-off current	V _{CB} =rated V _{CBO} ; I _B =0			1.0	mA	
I _{CEO}	Collector cut-off current	2N5869			2.0	mA	
		2N5870					V _{CE} =40V; I _B =0
I _{EBO}	Emitter cut-off current	V _{EB} =5V; I _C =0			1.0	mA	
h _{FE}	DC current gain	I _C =1.5A ; V _{CE} =4V	20		100		
f _T	Transistion frequency	I _C =0.5A ; V _{CE} =10V; f=1MHz	4			MHz	

Silicon NPN Power Transistors

2N5869 2N5870

PACKAGE OUTLINE

