


1.SCOPE

SHOULDER's SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal piezoelectrical chip. they are used in electronic equipments such as TV and so on.

2.Construction


2.1 Dimension and materials

Type: IF38B3M

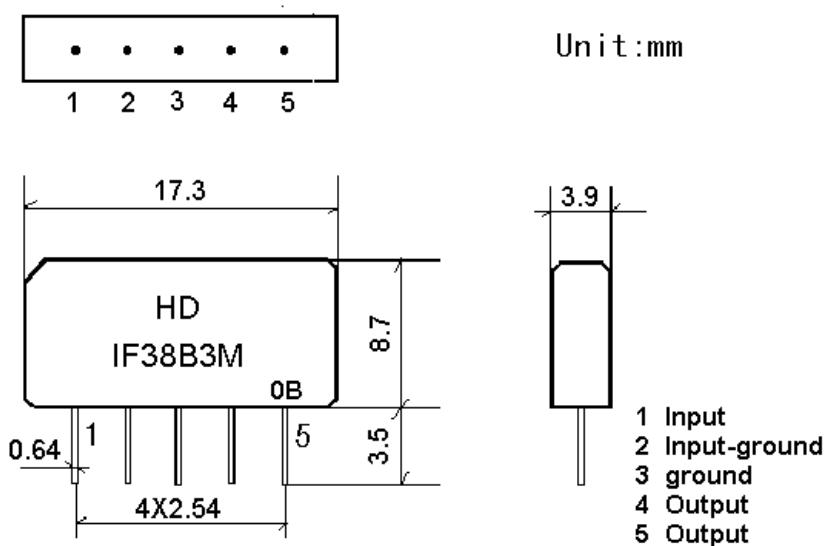


0: year(0,1,2,3,4,5,6,7,8,9)

B:product in this quarter(A:1~3,B:4~6,C:7~9,D:10~12)

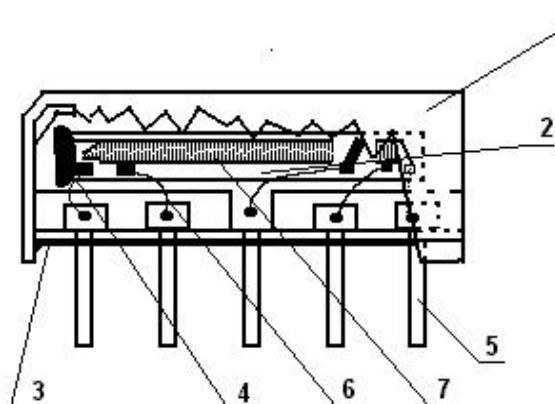

Components	Materials
1. Outer casing	PPS
2. Substrate	Lithium niobate
3. Base	Epoxy resin
4. Absorber	Epoxy resin
5. Lead	Cu alloy+Au plate
6. Bonding wire	AISI alloy
7. Electrode	Al

2.2. Circuit construction, measurement circuit

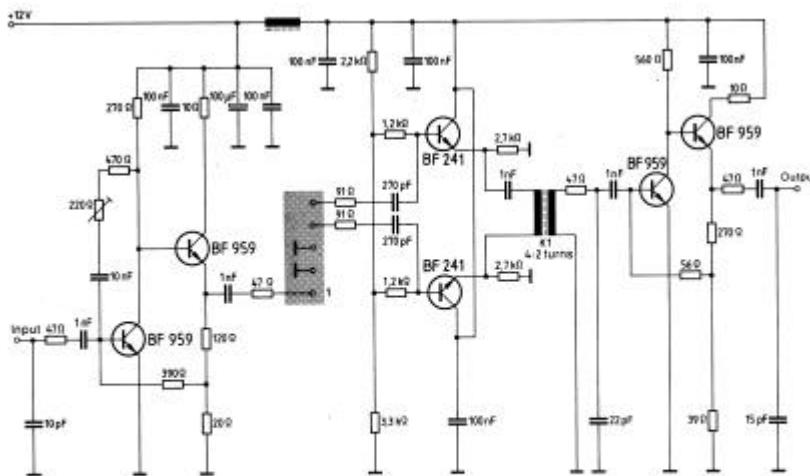

Test circuit for SIP-5 filter
Input impedance of the symmetrical post-amplifier: $2\text{ k}\Omega$ in parallel with 3 pF

3.Characteristics

Standard atmospheric conditions

Unless otherwise specified , the standard rang of atmospheric conditions for making measurements and tests is as follows;

Ambient temperature : 15 to 35

Relative humidity : 25% to 85%

Air pressure : 86kPa to 106kPa

Operating temperature range

Operating temperature range is the range of ambient temperatures in which the filter can be operated continuously. -10 ~ +60

Storage temperature range

Storage temperature range is the range of ambient temperatures at which the filter can be stored without damage.

Conditions are as specified elsewhere in these specifications. -40 ~ +70

Reference temperature

3.1 Maximum Rating

DC voltage	VDC	12	V	Between any terminals
AC voltage	Vpp	10	V	Between any terminals

3.2 Electrical Characteristics

Source impedance	Z _s =50				
Load impedance	Z _L =2k	//3pF		T _A =25	
Items	Freq	Min	typ	max	
Insertion attenuation Reference level	36.50MHz	15.3	17.3	19.3	dB
Relative attenuation	38.00MHz	4.7	6.2	7.7	dB
	33.57MHz	-0.3	1.2	2.7	dB
	31.50MHz	13.2	15.2	17.2	dB
	32.50MHz	14.4	16.4	-	dB
	30.00MHz	40.0	47.0		dB
	39.50MHz	40.0	47.0		dB
Sidelobe	25.00~30.00MHz	34.0	42.0		dB
	39.50~45.00MHz	34.0	41.0		dB
Temperature coefficient		-72		Ppm/k	

3.3 Environmental Performance Characteristics

Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70 1000H	< 1.0
Low temperature test -40 1000H	< 1.0
Humidity test 40 90-95% 1000H	< 1.0
Thermal shock -20 ==25 ==80 20 cycle 30M 10M 30M	< 1.0
Solder temperature test Sold temp.260 for 10 sec.	< 1.0
Soldering Immerse the pins melt solder at 260 +5/-0 for 5 sec.	More then 95% of total area of the pins should be covered with solder


3.4 Mechanical Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0
Drop test On maple plate from 1 m high 3 times	<1.0
Lead pull test Pull with 1 kg force for 30 seconds	<1.0
Lead bend test 90° bending with 500g weigh 2 times	<1.0

3.5 Voltage Discharge Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode	<1.0

3.6 Frequency response

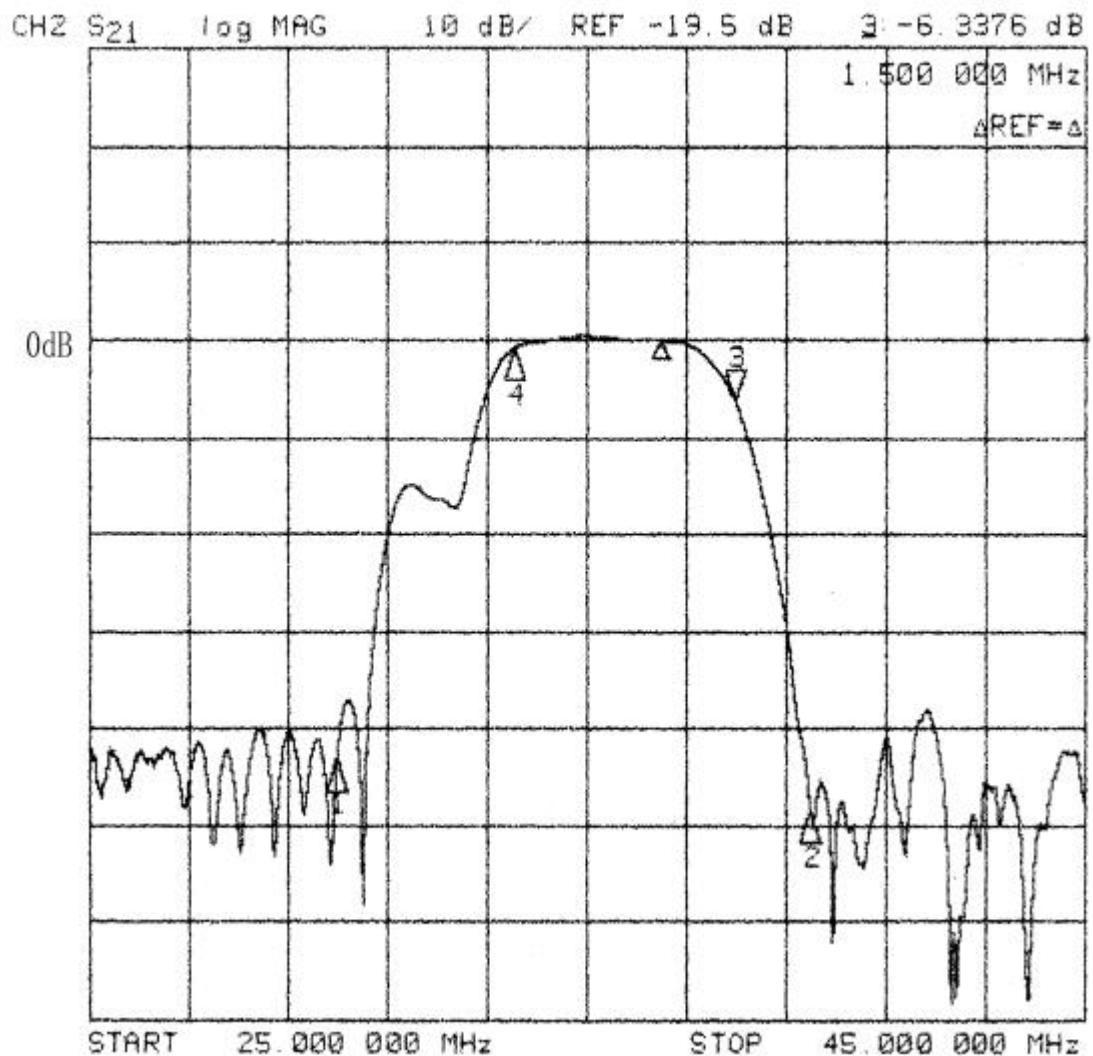


CH1 S21 log MAG
CH2 S21 delay

1 dB/
30 ns/

REF ~19.5 dB
REF 1.018 μ s

1: - .6801 dB
1 - 8.2989 ns

-2.930 000 MHz
 Δ REF=Δ

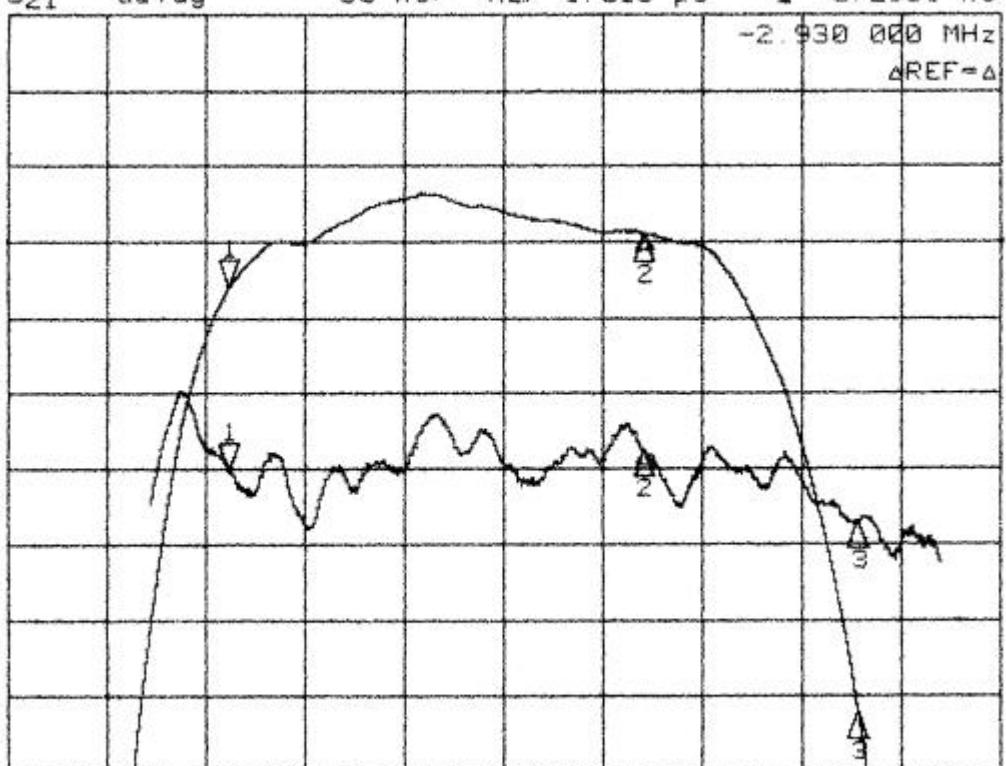


START 32.000 000 MHz

STOP 39.000 000 MHz

CH2 S21 log MAG 10 dB/ REF -19.5 dB

0dB

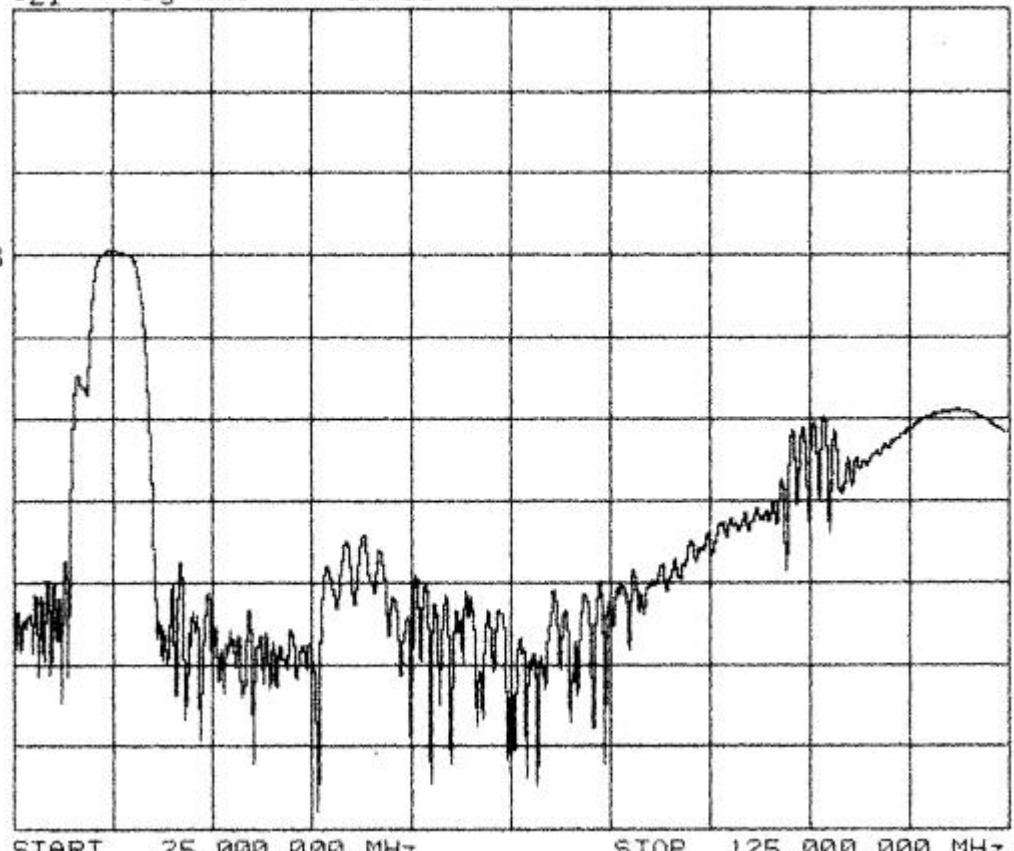

START 25.000 000 MHz

STOP 125.000 000 MHz

CH2 S₂₁ log MAG 10 dB/ REF -26 dB

