


SEALOK™


Wall Mount Receptacles



SEALOK housings are molded from a high durability thermoplastic material with metal TRI-LOK bayonet pins on the outside perimeter of the connector body. Multi-pin inserts, same as MIL-C-26482, accommodate both pin and socket contacts. An interfacial seal on the pin face forms a water-protected seal when mated.

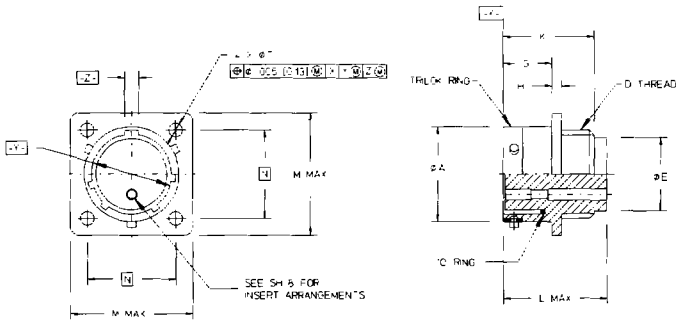

SHELL SIZE 14 SHOWN

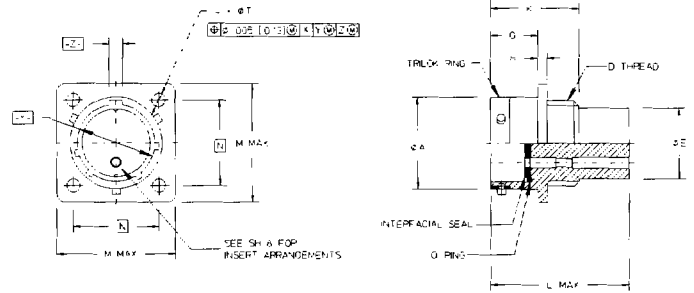

SHELL SIZE 1 SHOWN

CATALOG NUMBER	Ø A ± .003 / 0.08	D THREAD CLASS 2A	Ø E ± .010 / 0.25	G ± .014 / 0.36	H ± .008 / 0.20	K ± .010 / 0.25	L MAX	M MAX	N	Ø T
UTGWO 10-6S-1	.588	9/16-24 UNEF	.433					.954	.719	
	14.93		11.00					24.23	18.26	
UTGWO 12-10S-1	.748	1 1/16-24 UNEF	.547	.447	.09	.839	.965	1.047	.812	
	19.00		13.90					26.59	20.62	
UTGWO 14-19S-1	.873	1 3/16-20 UNEF	.673	11.35	2.3	21.30	24.51	1.141	.906	
	22.17		17.10					28.98	23.01	
UTGWO 16-26S-1	.998	1 5/16-20 UNEF	.787					1.234	.969	.128
	25.35		20.00					31.34	24.61	
UTGWO 20-41S-1	1.248	1 3/16-18 UNEF	1.012	.573	.10	1.060		1.453	1.156	
	31.70		25.70					36.91	29.36	
UTGWO 22-55S-1	1.373	1 3/16-18 UNEF	1.126	14.55	.14	1.100	1.030	1.578	1.250	
	34.87		28.60					40.08	31.75	
UTGWO 24-61S-1	1.498	1 7/16-18 UNEF	1.252	.604	3.5	1.193		1.703	1.375	.154
	38.05		31.80					43.26	34.93	

CATALOG NUMBER	Ø A ± .003 / 0.08	D THREAD CLASS 2A	Ø E ± .010 / 0.25	G ± .014 / 0.36	H ± .008 / 0.20	K ± .010 / 0.25	L MAX	M MAX	N	Ø T
UTGWO 10-6P-1	.588	9/16-24 UNEF	.433					.954	.719	
	14.93		11.00					24.23	18.26	
UTGWO 12-10P-1	.748	1 1/16-24 UNEF	.547	.447	.09	.839	1.330	1.047	.812	
	19.00		13.90					26.59	20.62	
UTGWO 14-19P-1	.873	1 3/16-20 UNEF	.673	11.35	2.3	21.30	33.78	1.141	.906	
	22.17		17.10					28.98	23.01	
UTGWO 16-26P-1	.998	1 5/16-20 UNEF	.787					1.234	.969	.128
	25.35		20.00					31.34	24.61	
UTGWO 20-41P-1	1.248	1 3/16-18 UNEF	1.012	.573	.10	1.060		1.453	1.156	
	31.70		25.70					36.91	29.36	
UTGWO 22-55P-1	1.373	1 3/16-18 UNEF	1.126	14.55	.14	1.100	1.390	1.578	1.250	
	34.87		28.60					40.08	31.75	
UTGWO 24-61P-1	1.498	1 7/16-18 UNEF	1.252	.604	3.5	1.193		1.703	1.375	.154
	38.05		31.80					43.26	34.93	