

## WFC11B0922CG

For Short-range Wireless

### Features

- For land mobile radio system(Cordless telephone).
- Low insertion loss.
- Compact and light.




Pb Free

RoHS Compliant  
Directive 2002/95/EC

### Specifications

Model	WFC11B0922CG		
Item	min.	typ.	max.
Nominal frequency : $f_n$ (MHz)	-	922.5	-
Minimum insertion loss (dB)	-	2.1	3.5
3dB band width (MHz)	$\pm 2$	$\pm 7$	-
Guaranteed attenuation (dB) (from the throughlevel)	882.5 to 901.5 MHz	30	-
	943.5 to 962.5 MHz	30	-
	910.5 MHz	8	-
	934.5 MHz	8	-
Operating temperature range (°C)	-20 to +85		
Impedance ( $\Omega$ )	50		

### Dimensions

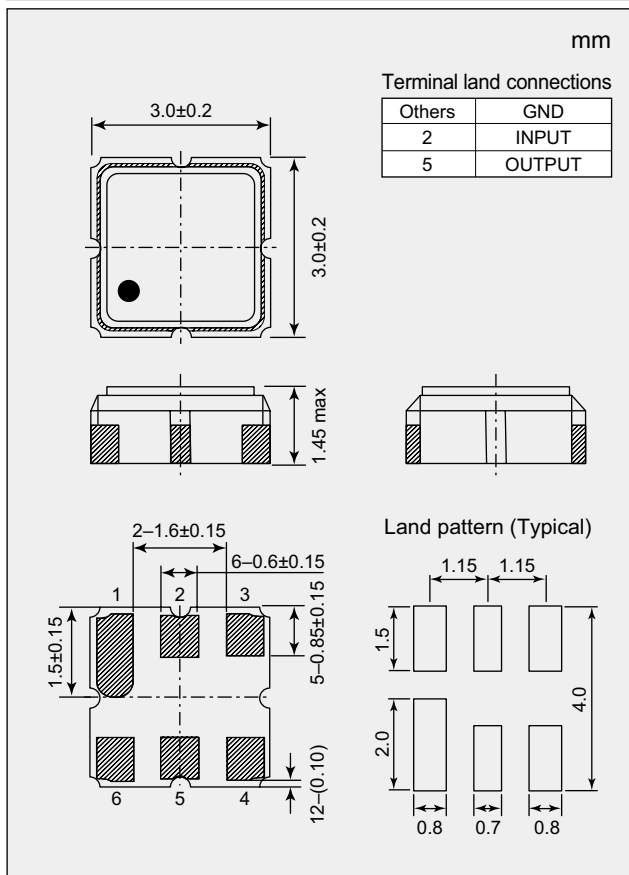

### Characteristics

