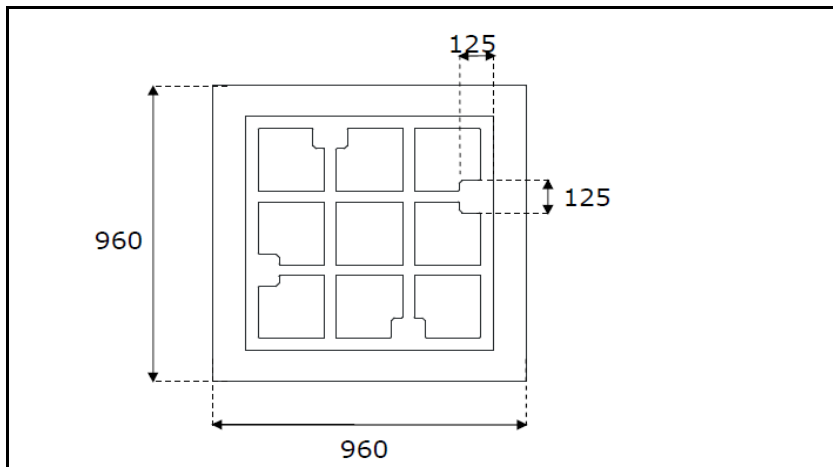


Radiation	Type	Electrodes
Deep Red	DDH	N (cathode) up

Dimensions
 <p>Typ. Thickness: 150 (±25) μm Cathode: gold alloy, 1.5 μm Anode: gold alloy, 0.5 μm structured, 25% covered</p>

Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Forward Voltage	Vf	If=20mA	--	1.7	2.0	V
Forward Voltage	Vf	If=300mA	--	2.0	2.4	V
Reverse Voltage	Vr	Ir=100μA	5	--	--	mW
Radiant Power	Φe	If=20mA	0.75	1.0	--	mW
Radiant Power	Φe	If=300mA	18	24	--	mW
Switching Time	tr, tf	If=20mA	--	40	--	ns
Peak Wavelength	λp	If=300mA	685	700	710	nm
Spectral Bandwidth at 50%	Δλ0.5	If=300mA	--	40	--	nm

Absolute Maximum Ratings (Ta = 25°C)

ITEMS	SYMBOL	RATINGS	UNIT
Forward DC Current	If	350	mA



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

2014-04-04