


# LTCC

## High Temperature Inductors

### 0.27x0.27 inch size

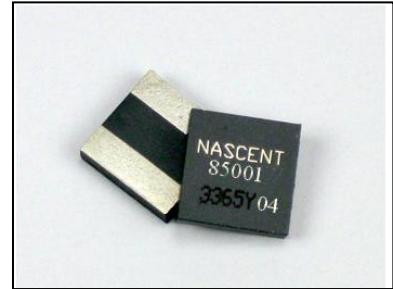

NASCENTechnology, Inc. has developed a series of high temperature, RoHS compliant inductors using low temperature co-fired ceramic (LTCC) ferrite usable to 300°C that feature low profile, rugged packaging, and self shielding characteristics.



#### Electrical Parameters at 25 °C unless otherwise noted

Part No.	No Load Inductance <sup>†</sup> μH	100 mA Inductance μH	100 mA Tolerance	Nominal DC Resistance ohms	Rated Current <sup>††</sup> mA	Saturation Current* mA
85008	15	12	20%	0.40		350
85012	35	29	25%	0.60	530	
85016	63	48	30%	0.80		250
85077	33	30	25%	0.38		250

<sup>†</sup> Tolerance for no load inductance is  $\pm 25\%$

<sup>††</sup> Current will cause a 35 °C temperature rise over ambient (measured 20 to 55 °C)

\* Saturation Current is the current that results in a 35% decrease in inductance over the 100 mA Inductance.

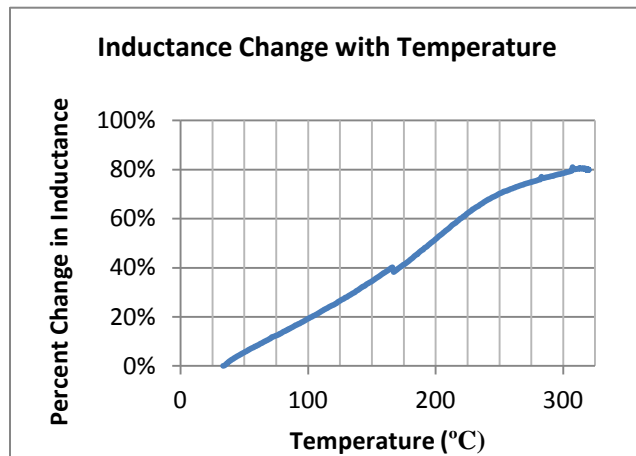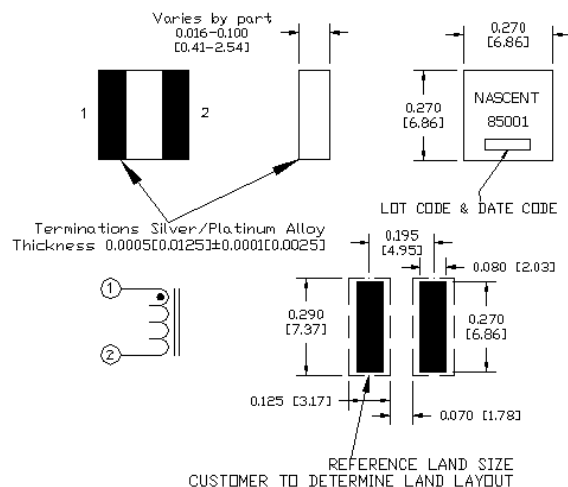

Part dimension units: inches [millimeters]

For additional information, contact: Daryl Schofield, General Manager  
 Phone: 605-882-8513, Fax: 605-884-2450, E-mail: dschofield@nascenttechnology.com  
 NASCENTechnology, Inc. 121 Airport Drive, Watertown, SD 57201  
[www.nascenttechnology.com](http://www.nascenttechnology.com)