



ADVANCED TECHNICAL DATA SHEET*

DATA SHEET NO. 41005C

MOSBLOC™ IGBT MODULE



IXGQ100N60Y4

MAXIMUM RATINGS (TC = 25 °C unless otherwise indicated)


Rating	Conditions	Symbol	Value	Unit
Collector-Emitter Voltage		V _{CEs}	600	V
Gate-Emitter Voltage (Continuous)		V _{GES}	±20	V
Collector Current (IGBT)	DC, T _C = 25 °C	I _C	100	A
	DC, T _C = 85 °C	I _C	60	A
Collector Surge Current (IGBT)	1 mSec	I _{CM}	200	A
Diode Forward Current	DC	I _F	100	A
Diode Surge Current	1 mSec	I _{FM}	200	A
Maximum Junction Temperature		T _J	150	°C
Storage Temperature		T _{stg}	-40 to +125	°C
Thermal Resistance (IGBT)		R _{thJC}	0.3	K/W
Collector Power Dissipation		P _C	400	W
Derating (IGBT)			3.2	W/°C
Thermal Resistance (Diode)		R _{thJC}	1.0	K/W
Isolation Voltage	AC for 1 min.	V _{ISOL}	2500	V
Screw Torque (Mounting) (Terminals)		M _M	22	in-lb
		M _T	33	in-lb

OUTLINE DRAWING

CIRCUIT DIAGRAM

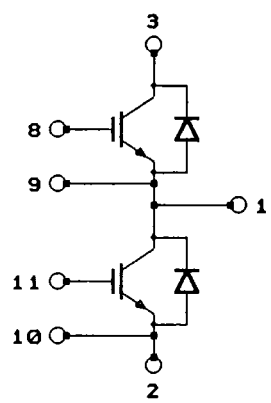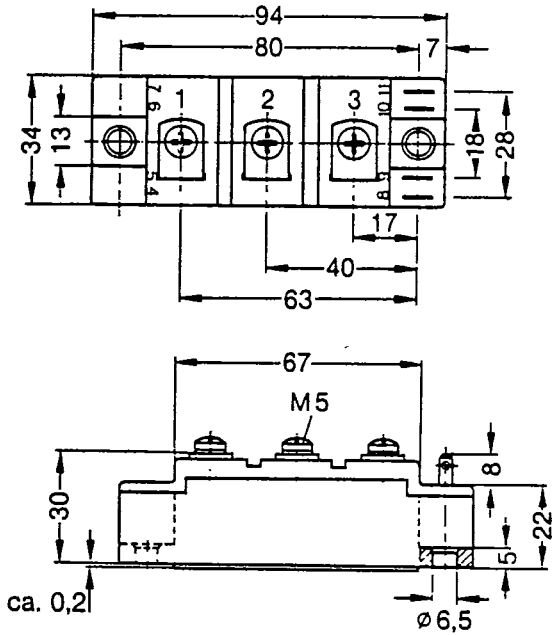

Y4 PACKAGE
(94mm X 34mm)

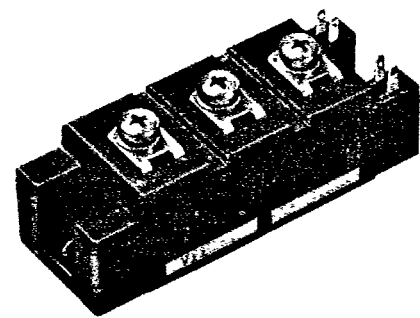

NOTE: DIMENSIONS IN mm (1 mm = 0.0394")

ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$ unless otherwise specified)

CHARACTERISTIC	TEST CONDITION		SYMBOL	MIN	TYP	MAX	UNIT
Collector-Emitter Breakdown Voltage (1)	$V_{GE} = 0\text{ V}; I_C = 2\text{ mA}$		$V_{(BR)CES}$	600			V
Collector Cut-off Current	$V_{CE} = 600\text{ V}; V_{GE} = 0\text{ V}; T_J = 25^\circ\text{C}$		I_{CES}			2.0	mA
	$V_{CE} = 480\text{ V}; V_{GE} = 0\text{ V}; T_J = 125^\circ\text{C}$		I_{CES}			30	mA
Gate Threshold Voltage	$I_C = 0.5\text{ mA}; V_{CE} = V_{GE}$		$V_{GE(th)}$	2.5		5.0	V
Gate-Emitter Leakage Current (4)	$V_{GE} = \pm 20\text{ V}; V_{CE} = 0$		I_{GES}			1000	nA
Collector-Emitter Saturation Voltage	$I_C = 100\text{ A}$ $V_{GE} = 15\text{ V}$	$T_C = 25^\circ\text{C}$	$V_{CE(sat)}$		3.0	3.5	V
		$T_C = 125^\circ\text{C}$	$V_{CE(sat)}$		3.5	4.0	V
Input Capacitance	$V_{CE} = 10\text{ V}$		C_{ies}		9.0		nF
Reverse Transfer Capacitance	$V_{GE} = 0\text{ V}$ $f = 1.0\text{ MHz}$		C_{res}		300		pF
Fall Time	LOAD = INDUCTIVE $I_C = 100\text{ A}$ $V_{CC} = 350\text{ V}$ $R_G = 100\ \Omega$	$T_J = 25^\circ\text{C}$	t_f		400		nS
Rise Time			t_r		400		nS
Turn-off Delay			$t_{d(off)}$		1500		nS
Turn-off Energy		$T_J = 125^\circ\text{C}$	E_{off}				mJ

DIODE CHARACTERISTICS

CHARACTERISTIC	TEST CONDITION		SYMBOL	MIN	TYP	MAX	UNIT
Repetitive Reverse Voltage (3)			V_{RRM}			600	V
Forward Voltage (2)	$I_F = 100\text{ A}; V_{GE} = 0\text{ V}$		V_F			1.25	V
Reverse Recovery Time	$I_F = 100\text{ A}$ $di/dt = 100\text{ A}/\mu\text{S}$ $V_{GE} = -10\text{ V}$ $V_{RR} = 350\text{ V}$	$T_J = 25^\circ\text{C}$	t_{rr}		60		nS
		$T_J = 125^\circ\text{C}$	t_{rr}		100		nS
Reverse Recovery Charge		$T_J = 25^\circ\text{C}$	q_{rr}		180		nC
		$T_J = 125^\circ\text{C}$	q_{rr}		550		nC

NOTES:


- $T_J = 25^\circ\text{C}$ to 150°C
- Pulse test: Pulse width $\leq 300\ \mu\text{S}$, duty cycle $\leq 2\%$
- Repetitive rating: Pulse width limited by maximum junction temperature.
- Gate-Emitter Voltage Transient (V_{GE}) = $\pm 30\text{ V}$.

*The data supplied herein reflects the Design Technical Objective Specification. The subject products are in Product Development. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

DETAILED PACKAGE OUTLINES


T-91-20

TO-220 AB

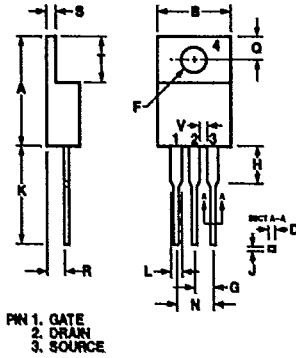


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	14.23	16.51	.560	.650
B	9.66	10.66	.380	.420
C	3.56	4.82	.140	.190
D	0.64	0.89	.025	.035
F	3.54	4.08	.139	.161
G	2.29	2.79	.090	.110
H	-	6.35	-	.250
J	0.51	.76	.020	.030
K	12.70	14.73	.500	.580
L	1.15	1.77	.045	.070
N	4.83	5.33	.190	.210
Q	2.54	3.42	.100	.135
R	2.04	2.49	.080	.115
S	0.64	1.39	.025	.055
T	5.85	6.85	2.30	2.70
V	1.15	-	.045	-

CONFORMS TO OUTLINE TO-220 (IR H-7)
Dimensions in Millimeters (Inches)

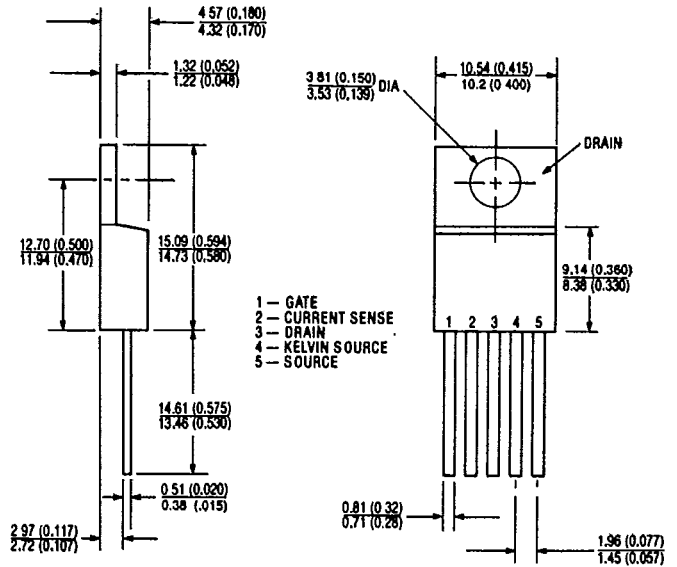


TO-247 (3 LEADED)

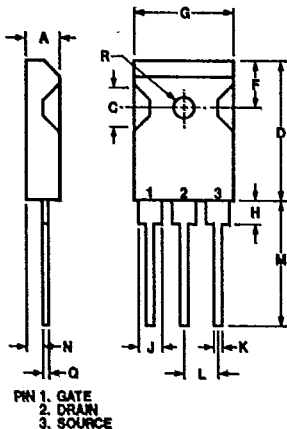


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.7	5.3	.185	.209
C	4.5	6.0	.178	.236
D	19.7	21.4	.776	.843
F	5.3	6.1	.209	.240
G	15.3	15.9	.602	.625
H	3.7	4.3	.146	.169
J	1.95	2.4	.077	.094
J ₁	2.97	3.4	.117	.134
K	1.0	1.4	.040	.055
L	5.4	5.5	.213	.217
M	19.9	20.2	.783	.795
N	2.2	2.6	.087	.102
Q	0.4	0.8	.016	.031
R	2.9	3.3	.114	.129

TO-247 (5 LEADED)

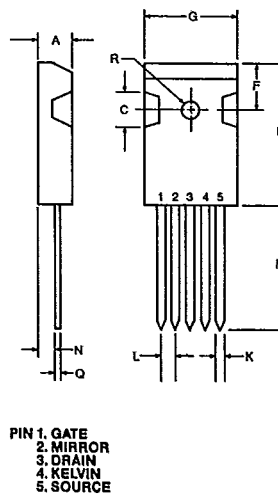


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.7	5.3	.185	.209
C	4.5	6.0	.178	.236
D	19.7	21.4	.776	.843
F	5.3	6.1	.209	.240
G	15.3	15.9	.602	.625
K	1.1	1.3	.043	.051
L	2.51	2.56	.099	.101
M	19.9	20.2	.783	.795
N	2.2	2.6	.087	.102
Q	0.4	0.8	.016	.031
R	2.9	3.3	.114	.129


TO-238
Dimensions in Millimeters

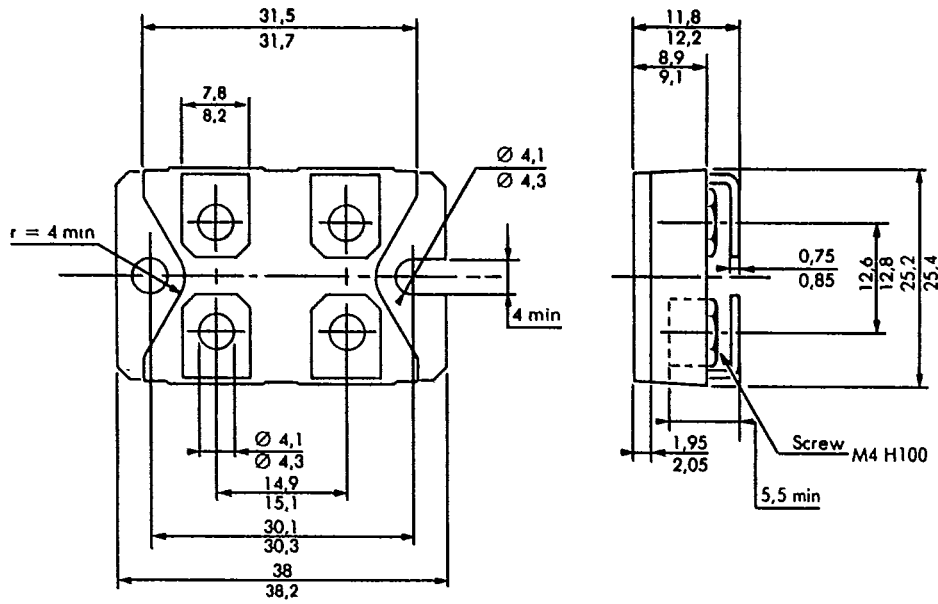


Y-4
Dimensions in Millimeters

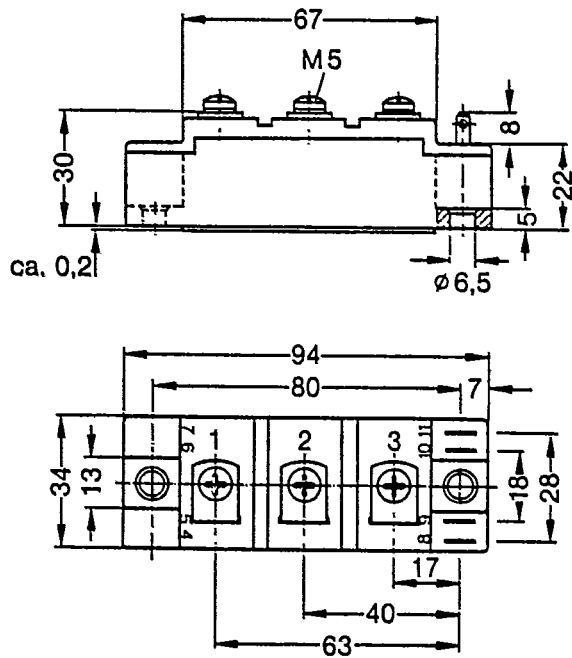


Y-3
Dimensions in Millimeters

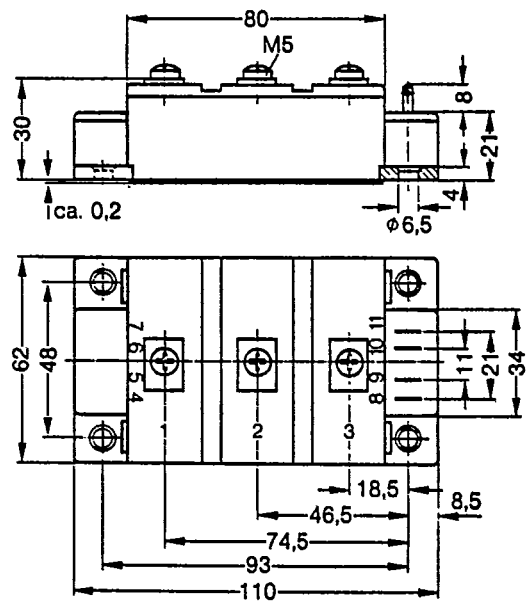

TO-220 HERMETIC

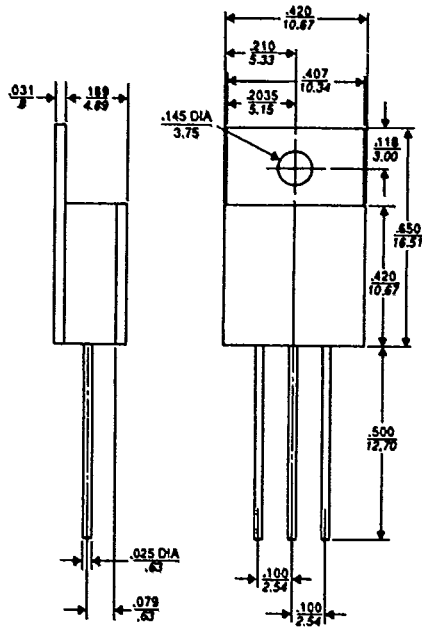


TO-204 AE

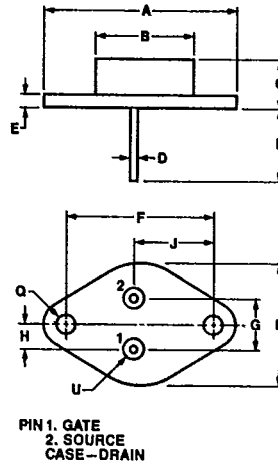


Dim.	Millimeter	Max.	Inches	Max.
A	—	39.37	—	1.55
B	—	19.71	—	.776
C	7.62	10.16	.300	.400
D	1.47	1.57	.058	.062
E	1.52	3.43	.060	.135
F	30.15	BSC	1.187	BSC
G	10.67	11.18	.420	.440
H	5.33	6.10	.210	.240
J	16.68	17.12	.657	.674
K	11.20	11.98	.441	.472
Q	3.86	4.11	.152	.162
R	24.84	25.27	.978	.995

TO-204 AA

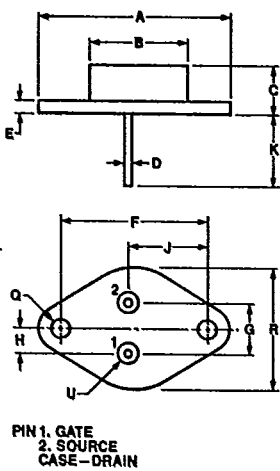


Dim.	Millimeter	Max.	Inches	Max.
A	—	39.37	—	.155
B	—	19.71	—	.776
C	6.35	8.89	.250	.350
D	.097	1.09	.038	.043
E	—	3.43	—	.135
F	30.15	BSC	1.187	BSC
G	10.67	11.18	.420	.440
H	5.33	6.10	.210	.240
J	16.68	17.12	.657	.674
K	11.20	11.98	.441	.472
Q	3.86	4.11	.152	.162
R	24.84	25.47	.978	1.00

TO-254 HERMETIC

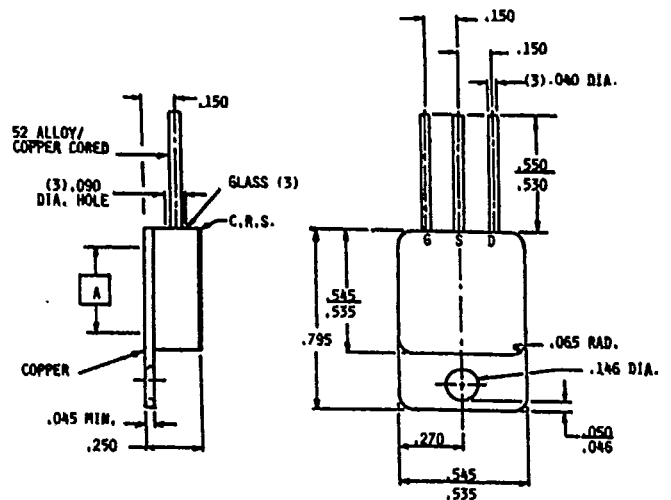

CONFORMS TO JEDEC OUTLINE TO-210AC (TO-61)
 Dimensions in Millimeters (Inches)

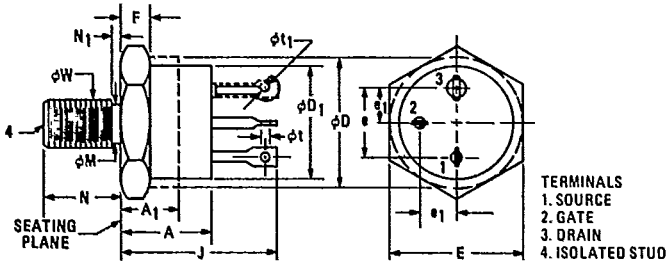


TERMINALS
 1. SOURCE
 2. GATE
 3. DRAIN
 4. ISOLATED STUD

Symbol	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	0.325	0.450	8.26	11.68	
A ₁	0.270		6.86		2
φD	0.610	0.687	15.49	17.45	2
φD ₁	0.570	0.610	14.48	15.49	
E	0.667	0.687	16.94	17.45	
e	0.340	0.415	8.64	10.54	5
e ₁	0.170	0.213	4.32	5.41	5
F	0.090	0.150	2.29	3.81	1

Symbol	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
J	0.640	0.875	16.26	22.23	
φM	0.220	0.249	5.59	6.32	
N	0.422	0.455	10.72	11.56	
N ₁		0.090		2.29	
φt	0.055	0.072	1.19	1.83	
φt ₁	0.046	0.077	1.17	1.96	4
φW	0.2225	0.2768	5.561	5.761	3

- NOTES
 1. DIMENSION DOES NOT INCLUDE SEALING FLANGES.
 2. PACKAGE CONTOUR OPTIONAL WITHIN DIMENSIONS SPECIFIED.
 3. PITCH DIAMETER - THREAD 1/4 28 UNF 2A (COATED).
 REFERENCE ISCREW THREAD STANDARDS FOR FEDERAL SERVICES - HANDBOOK H 281.
 4. THIS TERMINAL CAN BE FLATTENED AND PIERCED OR HOOK TYPE.
 5. POSITION OF LEADS IN RELATION TO THE HEXAGON IS NOT CONTROLLED.

QUADPAC

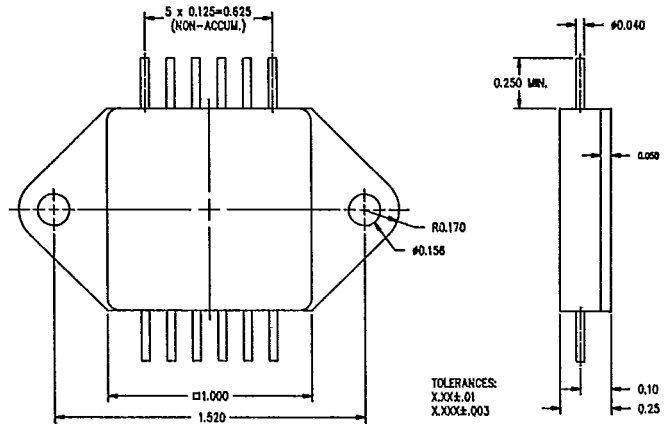

Z-Pac

