

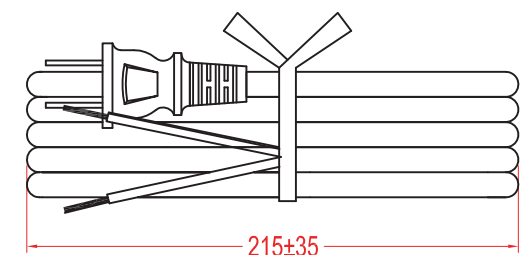


1	2		3		4	5		6	7			
PLUG COMPONENT			PLUG STRIP DIMENSION			END STRIP DIMENSION			END COMPONENT			
COLOR	DESCRIPTION	Q'ty	R.I.J	R.O.J	COLOR	SPT-1 18AWGx2F 60°C	Split	Strip	COLOR	COLOR	DESCRIPTION	TYPE
40P BLACK	IH-101(Polarized)	1	6 <sup>+1</sup> <sub>-0</sub>		Non-Polarized	Black	38±5.0	15.9±3.0	Non-Polarized	Non-Polarized	FULL TINNED	
Nickel-Plated	GEM 98662BBS-1	2	6 <sup>+1</sup> <sub>-0</sub>		Polarized		38±5.0	15.9±3.0	Polarized	Polarized	FULL TINNED	
						Length	1830±50					

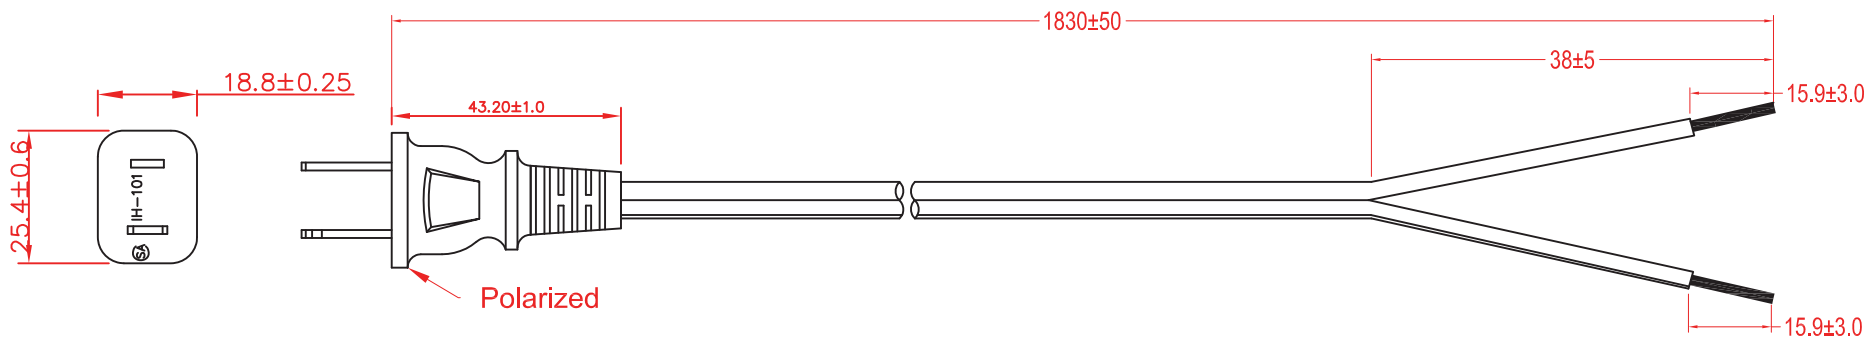

Hank Dimension

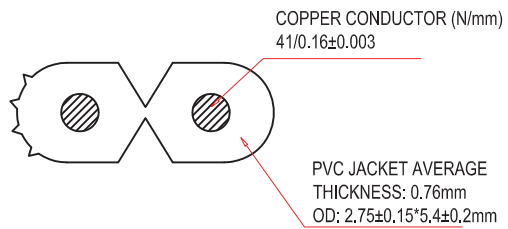

Wire cross section

**Material:**

- SPT-1-18AWG(0.824mm<sup>2</sup>) VW-1, 60° 300V
- Jacket color: Black
- Jacket: Black
- L- Polarized; N- No Polarized
- All material must be RoHS compliant.

**Electrical:**

- 100% open & short testing
- Insulation Resistance: 100MΩ min.
- Voltage: 500V DC/1 minute

Unit: mm



Scale	Free					Date	Name	Title <b>Power cord</b> SPT-1 ↔ Open end, Polarized, 6ft	
TOLERANCE						Drawn	27.02.15		Wilson
X.	±X					Approved	27.02.15	Groll	
X.X	±X								
X.XX	±X								
DIM	TOL					 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		Drawing-No.	rev00
X.°	±X°								
X.X°	±X°								
Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet	1/1	