

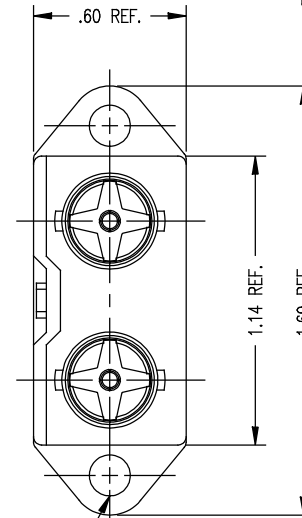


GSD

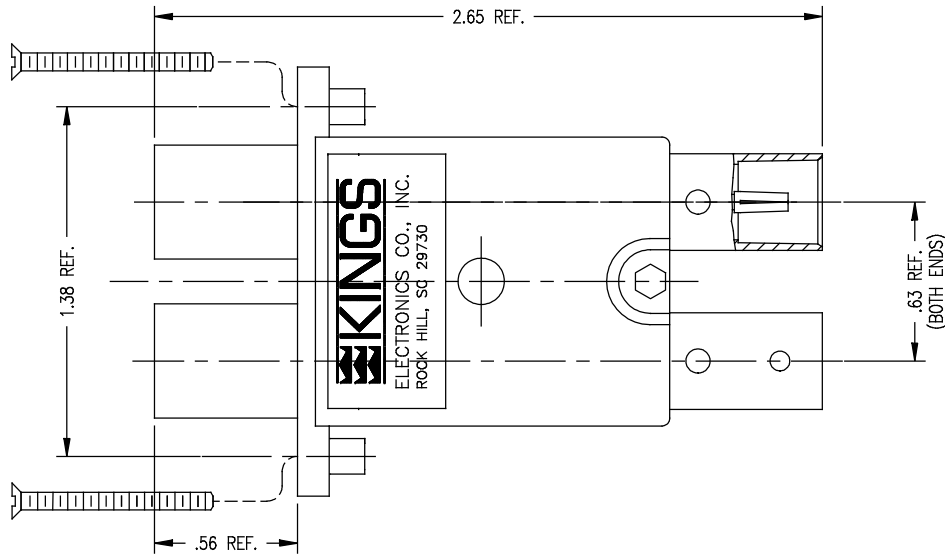


.16 D. REF.
(2 MOUNTING HOLES)

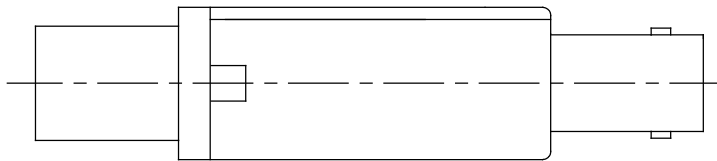

NORMAL THRU

PATCH THRU

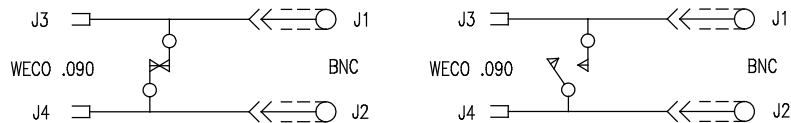

NOTES:

- INTERFACE PER MIL-STD-348, FIG. 301-2 (AS APPLICABLE).
- MATERIALS:
 BODY: ZINC (ZAMACK)
 CONTACTS: BER. COPPER, ASTM-B-196
 INSULATING MATERIALS: ZYTEL & DELRIN, ASTM-D-4894
 HARDWARE: STAINLESS STEEL
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:
 CONTACTS: HARD GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290.
 HARDWARE: PASSIVATE PER QQ-P-35
 ALL OTHER METAL PARTS: NICKEL PER QQ-N-290
- MECHANICAL CHARACTERISTICS: 50,000 LIFE CYCLES MIN.
- ELECTRICAL CHARACTERISTICS:
 IMPEDANCE: 75 OHMS
 FREQUENCY RANGE: DC TO 3.3 GHz.
 RETURN LOSS:
 NORMAL MODE: DC-2.4 GHz, -20 DB MAX.
 NORMAL MODE: DC-3.3 GHz, -15 DB MAX.

REVISIONS	
ISSUE	CHANGES
0	ER 38999 JLA 01/12/04
1	CN 39090 E JLA 05/07/04
2	CN 39197 C JLA 12/07/04
3	CN 39251 C JLA 03/21/05
4	CN 39662 C DCT 10/16/6

7780-9

7780-9SD

SCALE 2:1	
APPROX SURFACE AREA	
USED ON	
REF:	
JACK, DUAL, VIDEO, SERIAL DIGITAL	
DRAWN JLA	DATE 01/12/04
DESIGN JLA	DATE 01/12/04
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

GSD

7780-9