


Part Numbering

Series Prefix	RH	
Shell Size	E/E, A/A, B/B, C/C	
Mounting Type	B	4-40 clinch for rear panel mounting
	P	M3 clinch nut for rear panel mounting
	D	With female screw locks
Contact Type		P/P, S/S, P/S, S/P
	P/P	Plug/Plug
	S/S	Socket/Socket
	P/S	Plug/Socket
	S/P	Socket/Plug
Footprint	1	15.88mm
	2	19.05mm
	3	22.86mm
Contact Finish		Gold
Shell Finish		Tin (with indents plug only)

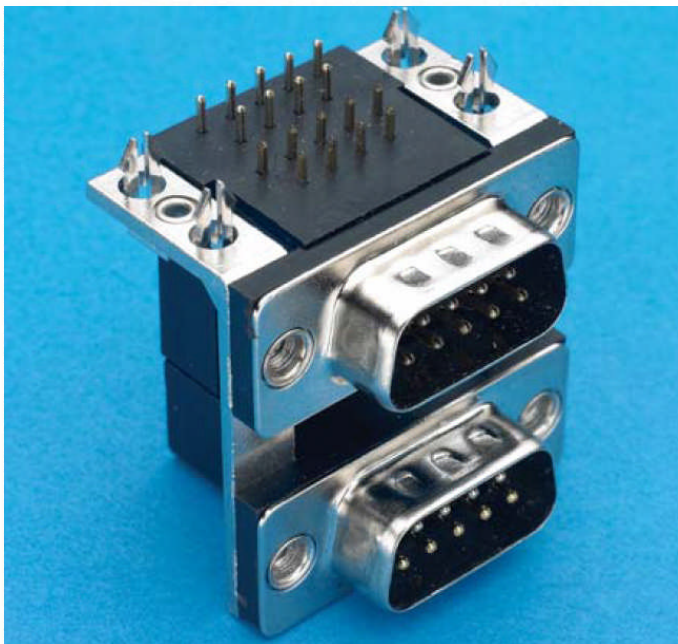

For Custom or Selectively loaded products specification please consult Cinch Sales Office.

Material

Insulator:	PBY +30% Glass Fibre (UL94V-0)
Contact:	Phosphor Bronze or Brass
Contact Plating:	Gold/Tin over Nickel
Shell:	Gold/Tin over Nickel

Specification

Current Rating:	5 Amp
Dielectric Strength:	1000V for one minute
Insulator Resistance:	1000 M Min at 500V DC
Temperature:	-55°C to +105°C

Part Numbering

