
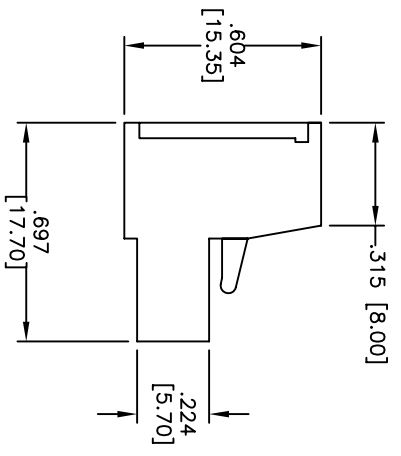
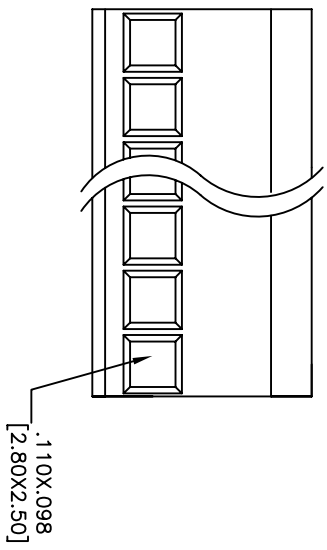


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		Released	12/18/2003	
A		Redrawn	10/26/07	SS
B		REVISED DIM.	12/31/08	

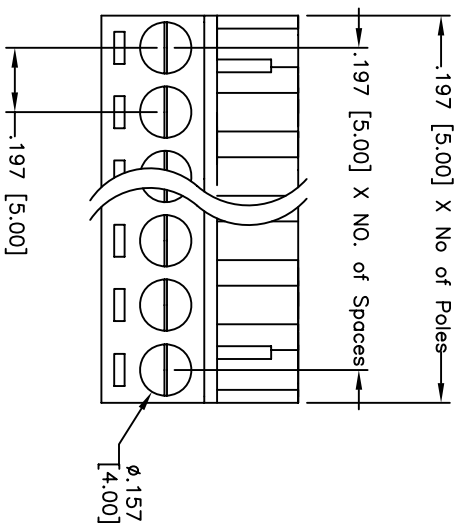

**SPECIFICATIONS:**  
 Material: Insulator: Thermoplastic, rated UL94V-0  
 Insulator color: Green  
 Metal cage: Phosphor Bronze, Nickel plated  
 Screw: Steel, Zinc plated  
 Electrical:  
 Operating voltage: 250 VAC max.  
 Current rating: 12 Amps max.  
 Insulation resistance: 500 Mohms min.  
 Dielectric withstanding voltage: 2,000 VAC for 1 minute  
 Mechanical:  
 Wire range: 12 to 16 AWG Stranded  
 Temperature Rating: Operating temperature: -55°C to +105°C  
 Environmental: Lead free, RoHS compliant.

ROHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES EXCEPT AS NOTED	
.XX ± .10	ØXX ± .10
.XXX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN TD	12/18/2003
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	TERMINAL BLOCK, 0.5mm, 02-24 POLE
SIZE	PART NO.
X	TSF-XX
REF: S00036T	SCALE: NTS
	SHEET 1 OF 1
	REV. B