
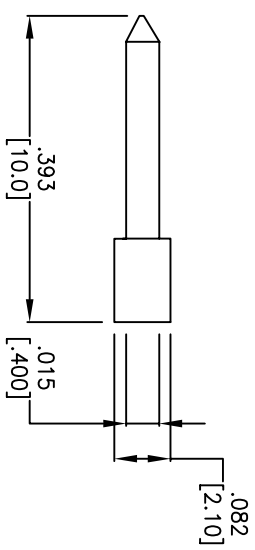



Rev	AWO #	Description	Date	Appr
-	6339	RELEASED	3/30/06	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

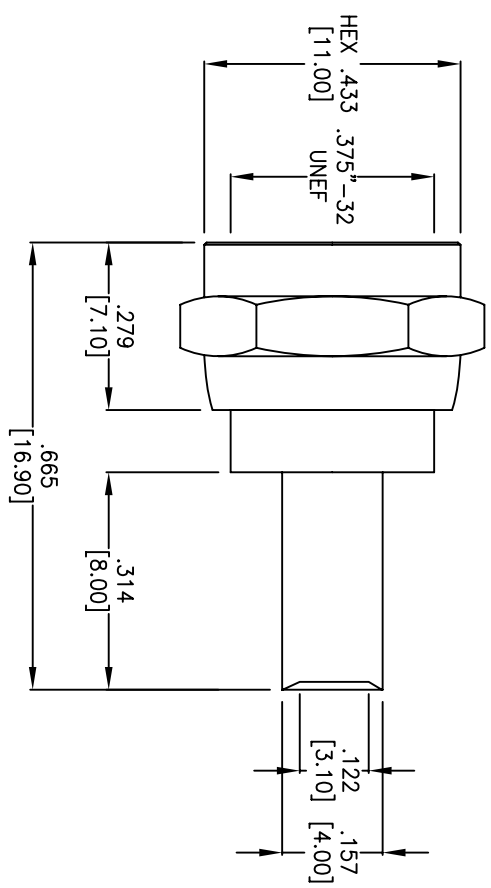

**SPECIFICATIONS:**

**Material:**  
 Insulator: Teflon  
 Body: Brass, Nickel plated  
 Chassis: Brass, Nickel plated  
 Insulator color: White  
 Pin: Brass, Gold plated

**Electrical:**  
 Operating voltage: 150 VAC max  
 Contact resistance: 5mohms Max. initial  
 Impedance: 75 ohms  
 Frequency range: 0-4 GHz  
 Insulation resistance: 5000 Mohms min  
 Dielectric withstanding voltage: 1500 VAC rms  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES  
 .X ± .10 Ø.X ± .10  
 .XX ± .020 Ø.XXX ± .015  
 .XXX ± .015 Ø.XXXX ± .010

APPROVALS

DRAWN	LFJ	DATE	3/30/06
CHECKED			
APPROVED			

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RF MALE TYPE F, PC MOUNT, 75 OHM  
 TEFLON INSULATOR

SIZE: PART NO. RF4-26-T-03-75

REF: SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1