

6

5

4

3




2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	10480	RELEASED	8/17/10	

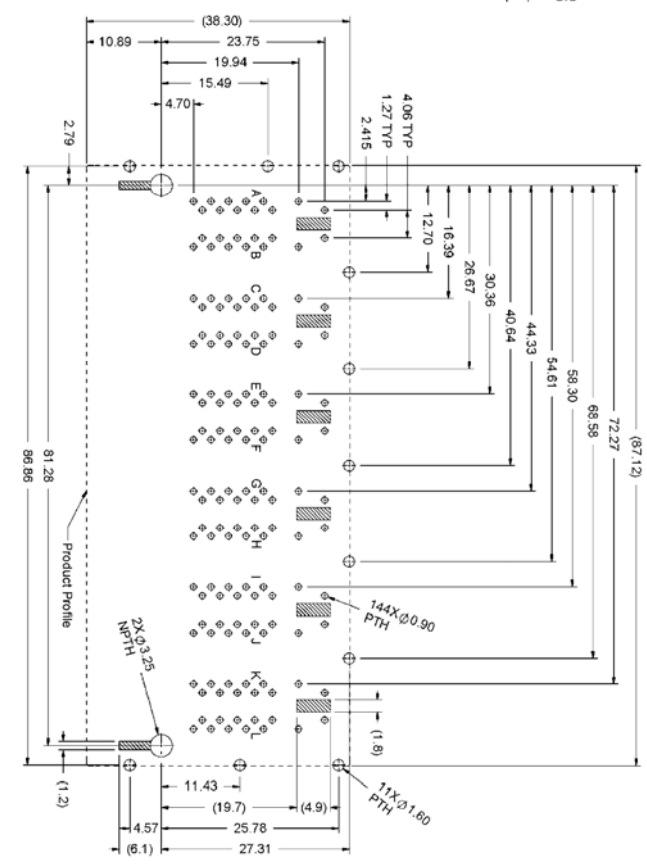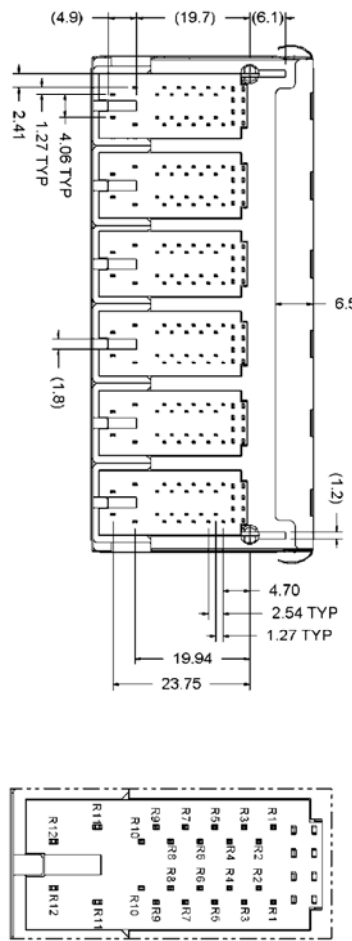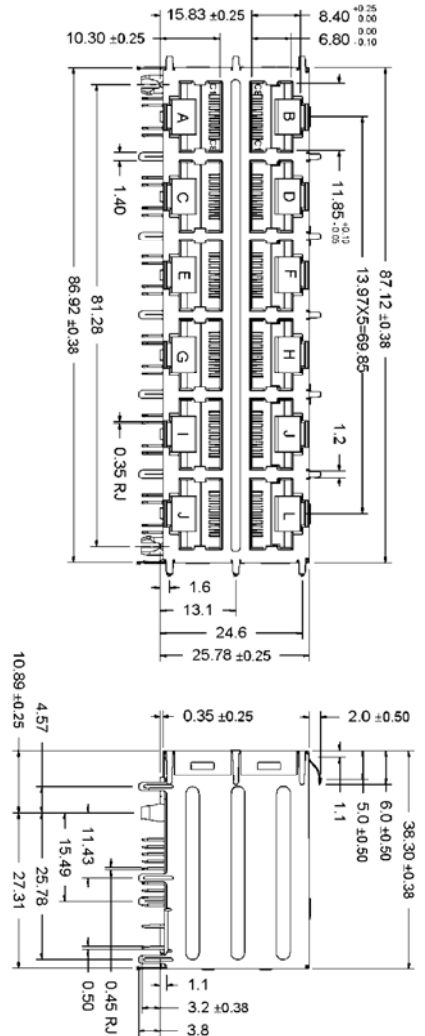

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shield: Stainless

Contact Plating:

Gold Flash over Nickel underplate on contact area,

Tin over Copper underplate on tails

(See chart for thickness).

Electrical:

RoHS:

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 1000 VAC min

Temperature Rating:

Operating temperature: 0°C to +70°C

Environmental: Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	
.X	±.10
.XX	±.020
.XXX	±.015
Ø.X	±.10
Ø.XX	±.015
Ø.XXX	±.010
Holes	
Ø.X	±.10
Ø.XX	±.015
Ø.XXX	±.010

ADAM TECH
 909 Ratway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MODULAR JACK GANGED, 12 PORT, 8P8C

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	MTJG-12-88JX1-V-FSG-PG-M113	
REF:	S00073T	



6

5

4

3

2

1

A

B

C

D