



View shown without plastic pin and grounding

Detail of grounding strip

PC card drilling dimensions(after plating)  
(thickness 1.60 ±0.25 mm)

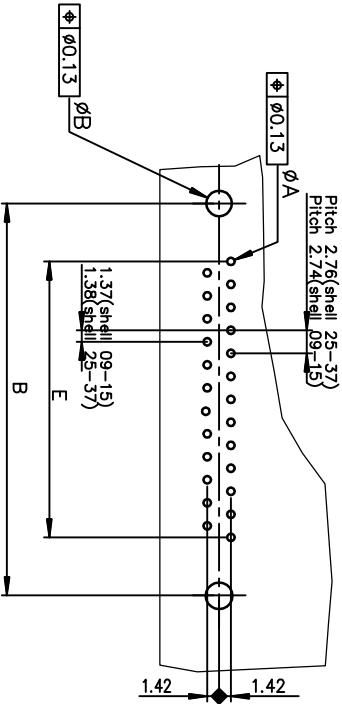

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	TIN LEAD PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C4GV00 D09S80C6GV00 D09S80C8GV00
15	39.14	33.32	26.32	24.54	19.18	D15S80C4GV00 D15S80C6GV00 D15S80C8GV00
25	53.03	47.04	40.04	38.25	33.12	D25S80C4GV00 D25S80C6GV00 D25S80C8GV00
37	69.32	63.50	56.50	54.71	49.68	D37S80C4GV00 D37S80C6GV00 D37S80C8GV00

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	LEAD FREE PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C4GV00LF D09S80C6GV00LF D09S80C8GV00LF
15	39.14	33.32	26.32	24.54	19.18	D15S80C4GV00LF D15S80C6GV00LF D15S80C8GV00LF
25	53.03	47.04	40.04	38.25	33.12	D25S80C4GV00LF D25S80C6GV00LF D25S80C8GV00LF
37	69.32	63.50	56.50	54.71	49.68	D37S80C4GV00LF D37S80C6GV00LF D37S80C8GV00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0001

mat'l. code		surface	tolerance	projection	product family
J	EX-17889 MP	ISO 1302	ISO 406 ISO 1001	MM	D-SUB
dr	date	ISO 1302	tolerance unless otherwise specified	projection	product family
1995/10/31	2014/06/06	0.00±0.1	0.00±0.1	MM	D-SUB
engr	engr	scale	scale		
WITHUN PAUL	PAUL	2:1			
2014/06/06	2014/06/06				
chr	chr				
ALAS BABU	ALAS BABU				
2014/06/06	2014/06/06				
appr	appr				
BLIU K PAUL	BLIU K PAUL				
2014/06/06	2014/06/06				
sheet	revision	dwg no	sheet 1 of 1	size	
index	sheet	C01-8646-0412	A3		
		Product Customer Drawing			