
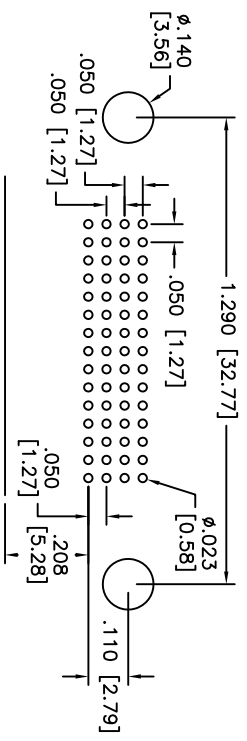
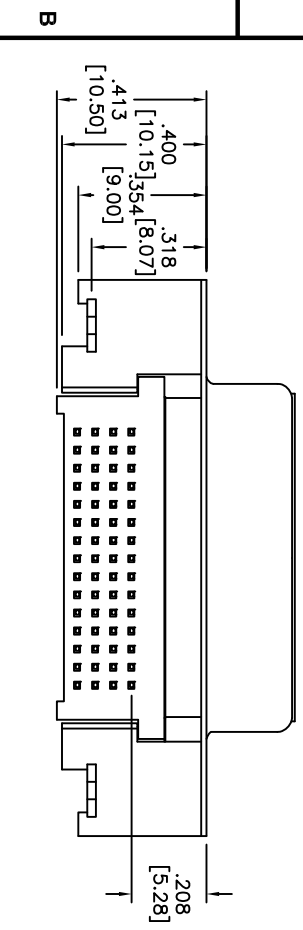
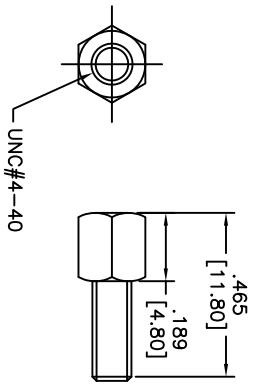
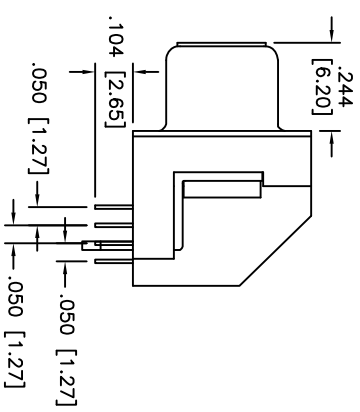


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/10	

APPROVED: _____
 DATE: _____ TITLE: _____

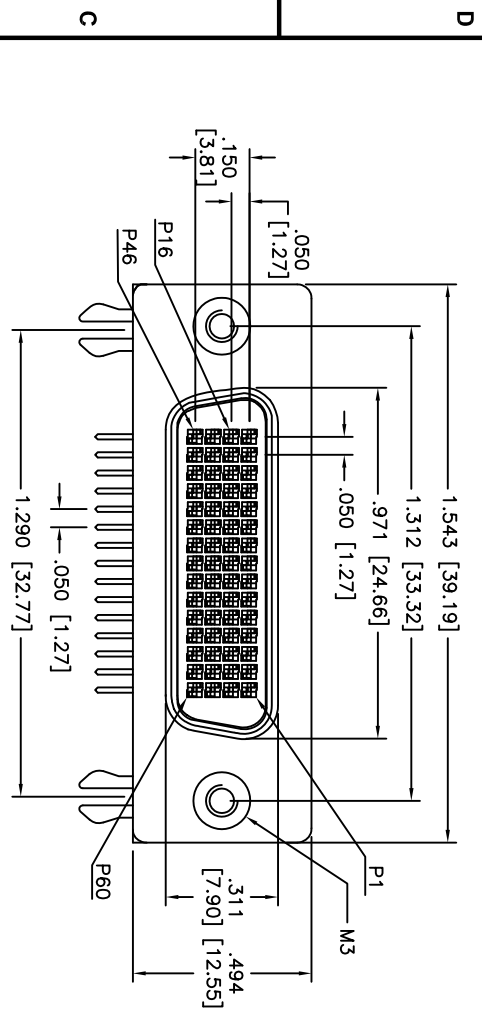

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

- Material: Housing: LCP, rated UL 94V-0, color Black
- Shell: SPCC, Nickel plated
- Terminal: Bronze
- Clip post: Brass, Tin plated
- Bottom Cap: PA9T, UL94V-0, color Ivory
- Screw: Copper Alloy, Nickel plated
- Plating: Gold Flash over Nickel underplate overall
- Electrical: Current rating: 3 Amps max
- Contact resistance: 20 mohms max
- Insulation resistance: 500 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -20°C to +80°C
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 260° for 5 sec.

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DMS CONNECTOR, DIP TYPE, 60P, R/A
 PART NO.: LFH-60-SL-A-M3
 SCALE: NTS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLE SIZES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN: DY	3/17/10
CHECKED	
APPROVED	

REF: S0027T	SIZE: X	PART NO.: LFH-60-SL-A-M3	REV: -
		SCALE: NTS	SHEET 1 OF 1