




BOTTOM VIEW

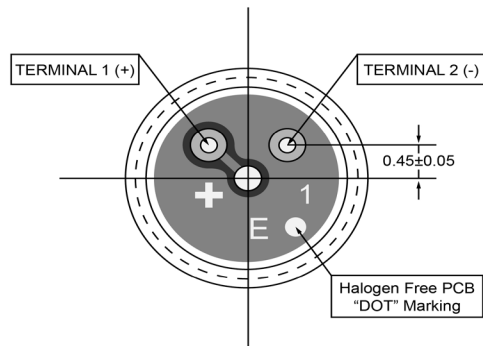


SIDE VIEW

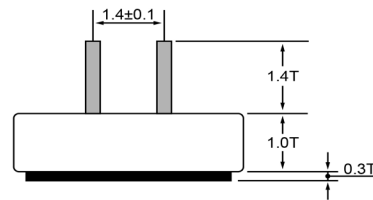

ANGLED VIEW

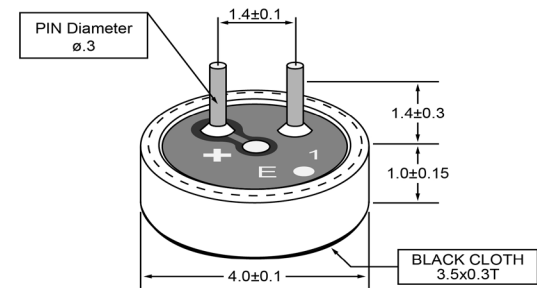

Specifications			Notes	Revision History															
Description	Value	Unit		Version	Description	Date	Approved												
Directivity	Omnidirectional		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS 	1	Released from Engineering	10/21/2013	J.S												
Technology	Electret Condenser																		
Sensitivity	-44	(dB)																	
Frequency Range	40 ~ 20,000	(Hz)																	
Rated Voltage	2	(V)																	
Output Impedance	2,200	(Ohm)																	
Connection Method	PC Pins																		
Voltage Range	1 ~ 10	(V)																	
Max Rated Current	0.45	(mA)																	
Minimum Signal to Noise Ratio	>60	(dB)																	
Operating Temperature	-40 ~ +85	°C																	
Storage Temperature	-40 ~ +85	°C																	
			Electret Condenser Microphone	MO044402-3															
				<table border="1"> <thead> <tr> <th>Drawn by</th> <th>Date</th> <th>Checked by</th> <th>Date</th> <th>Approved by</th> <th>Date</th> </tr> </thead> <tbody> <tr> <td>A.B.</td> <td>10/21/2013</td> <td>C.E.</td> <td>10/21/2013</td> <td>J.S</td> <td>10/21/2013</td> </tr> </tbody> </table>	Drawn by	Date	Checked by	Date	Approved by	Date	A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013			
Drawn by	Date	Checked by	Date	Approved by	Date														
A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013														