




L ± 3%

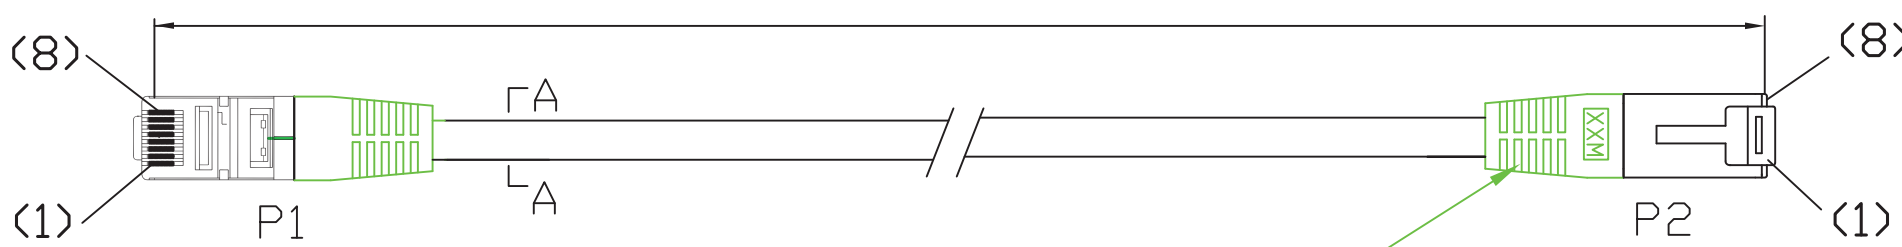


Material:

- Conductors: 26AWG 7*0.16±0.015mm
- Conductor Insulation color coding: (1) White/Orange, (1) Orange, (1) White/Green, (1) Green, (1) Blue, (1) White/Blue, (1) White/Brown, (1) Brown
- Cable jacket printing: CM (UL) C(UL) 4P 26AWG SFTP CAT.5E PATCH CABLE ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2
- Wiring T568B Color
- P1 & P2 Contact plug: RJ45 8P8C 3μ pc UL 94V-2
- Cable tie: White
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures: -20°C ~ +60°C

PIN OUT: CROSSOVER 568B-568A

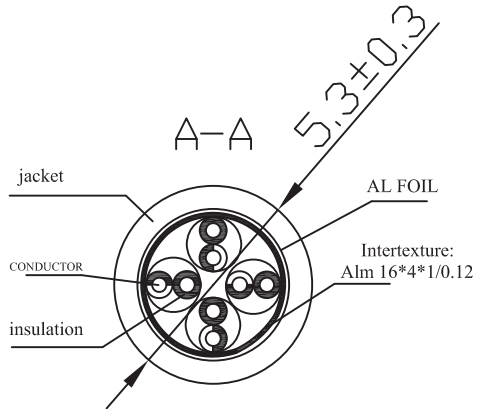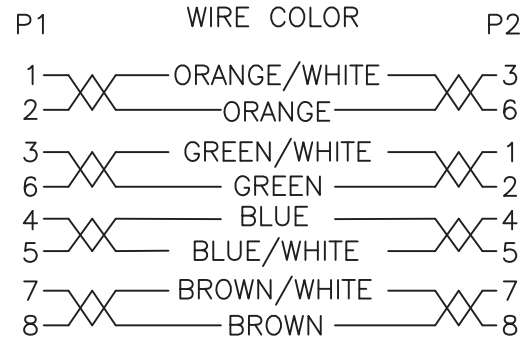

Order Code: A-MCKSSP-800xx-R
 Order lengths in meter: 0.5, 1, 2, 3, 5, 10, 15, 20, 30



Unit: mm



Scale	Free					Date	Name	Title Cat5e SFTP Crossover Patch cable 26AWG, gold plating
TOLERANCE					Drawn	10.07.14	Wilson	
X.	±0.3				Approved	10.07.14	Groll	ASSMANN WSW-No.
X.X	±X							A-MCKSSP-800xx-R
X.XX	±X							Drawing-No.
DIM	TOL							rev00
X.°	±X°	ⓐ	Drawn	10.07.14				Wilson
X.X°	±X°	ⓑ	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		Sheet 1/1
Angle	TOL	Id.						