


Extended length is with 500g of force

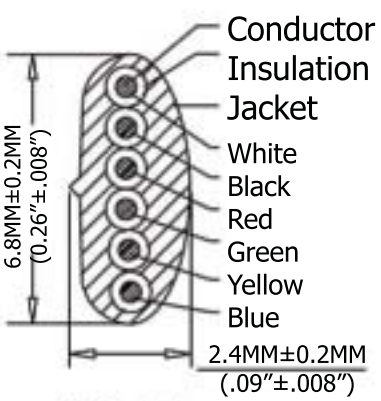

Conductor
Insulation
Jacket
White
Black
Red
Green
Yellow
Blue

| P1 | COLOR |
|----|--------|
| 1 | WHITE |
| 2 | BLACK |
| 3 | RED |
| 4 | GREEN |
| 5 | YELLOW |
| 6 | BLUE |

| Extended Length ("L2") | Typical Retracted Length ("L1") |
|-----------------------------|---------------------------------|
| 168.0 Inches - 193.2 Inches | 53.5 Inches |
| 4,267.2MM-4,907.28MM | 1,358.9MM |

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50μ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54μm[.000100] thick nickel underplate
- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

SEC: A-A



| | | | | | | | |
|-----------|-------|--|--|--|----------|-------------|-------|
| Scale | 1:1 | | | | Name | Item No. | |
| TOLERANCE | | | | | Chappell | | |
| X.X | ±0.40 | | | | Drawn | 11.02.11 | |
| X.XX | ±0.25 | | | | Approved | | |
| X.XXX | ±0.15 | | | | | Title | |
| Angle | ±3° | | | | | | |
| | | | | | | Drawing No. | rev00 |
| | | | | | | | |
| | | | | | | Replace | Sheet |

