


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/21/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

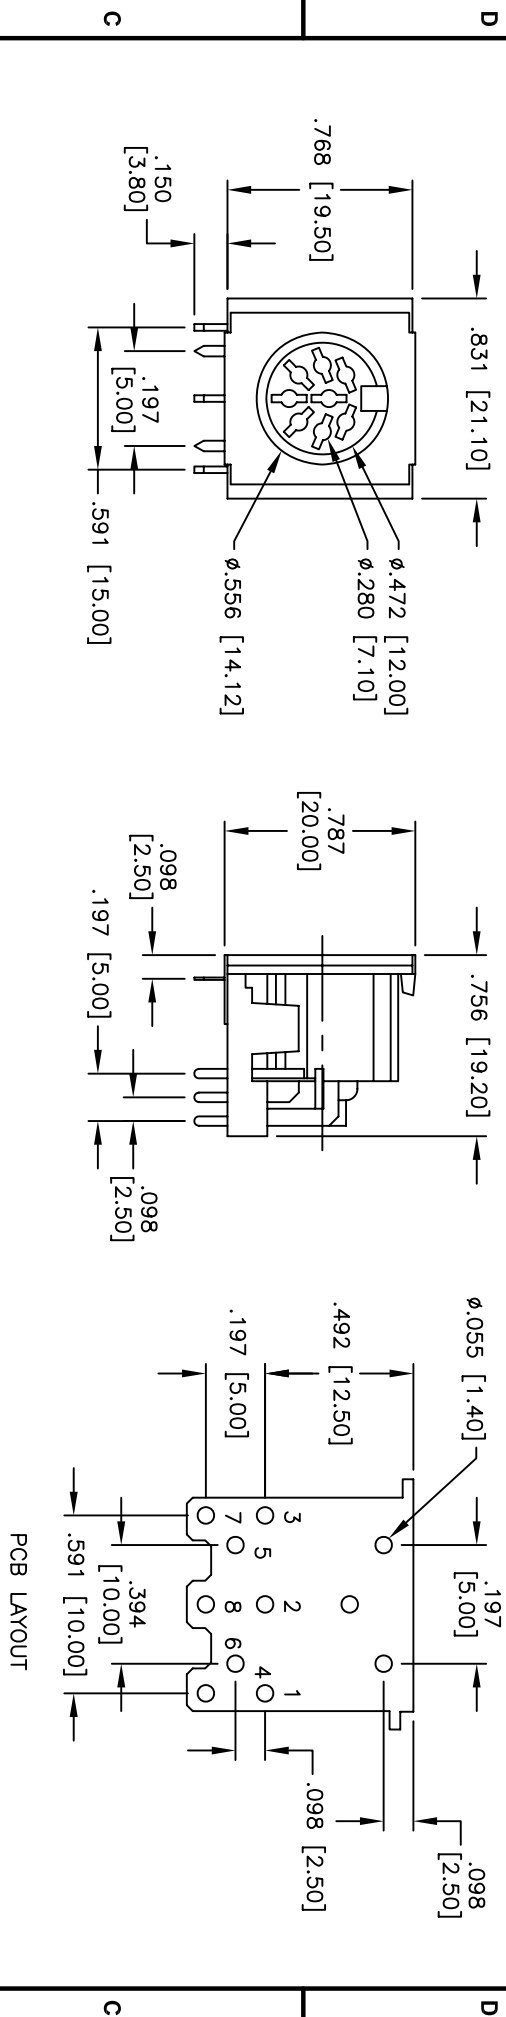

**MATING FACE CONFIGURATIONS**

DJ-003-S5	DJ-004-S5	DJ-006-S5	DJ-007-S5	DJ-008-S5

**SPECIFICATIONS:**

**Material:**  
 Insulator: PBT, Glass filled, rated UL 94V-0  
 Insulator color: Black  
**Contacts:** Brass  
 Shield: Coper Alloy, Bright Nickel plated  
**Plating:**  
 Tin over Copper underplate overall  
**Electrical:**  
 Operating voltage: 20 VDC max.  
 Current rating: 2 Amps max.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 500 Mohms min.  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -25°C to +100°C  
**Environmental:**  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235 for 5 sec.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLEES  
 .X ± .10 ØXX ± .10  
 .XX ± .020 ØXXX ± .015  
 .XXX ± .015 ØXXXX ± .010  
 APPROVALS DATE

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

DRAWN	SS	DATE	TITLE	SIZE	PART NO.	REV.
CHECKED			DIN JACK, SHIELDED, .197 [5.00] CENTERLINE FRONT PINS	X	DJ-00X-S5	-
APPROVED						