LFS Series

Paddle Flow Switches





- The LFS range of flow switches are paddle devices that are mounted vertically through a socket or upstand process connection.
- Electrical connections are made within the housing, which has a screw on sealed lid and cable gland.

A choice of paddle sizes is supplied with each switch and selection can be made with reference to the chart opposite.

- Stainless steel \$\$304 paddle
- 3/4"PF or 1"PT mounting plug thread
- IP65 Aluminium alloy housing or DIN 43650 connection
- Use for flow detection in pipes from 1" bore to 3" bore
- Maximum operating pressure 20 bar

Technical Specification

Housing material	Aluminium Alloy	Paddle material	304grade SS
Temperature range	See chart below	Maximum pressure	20 bar
Set point tolerance	±25 %	Pressure drop	0.2 bar
Repeatability	±5%	Connection in housing or	by DIN 43650

Electrical Specification


Contact Form		SPDT
Switching Power Max	VA	40
Switching Voltage AC/DC Max	V	230
Switching Current Max	Α	1.0

All ratings are for resistive load only.

Standard Parts	Mounting thread	Operating Temperature	Connection
LFS-01	1"NPT	-30 to +75°C	Terminate in housing
LFS-01H	1"NPT	-30 to +150°C	Terminate in housing
LFS-02	3/4"BSP	-30 to +75°C	Terminate in housing
LFS-02H	3/4"BSP	-30 to +150°C	Terminate in housing
LFS-03	1"NPT	-30 to +75°C	DIN 43650
LFS-03H	1"NPT	-30 to +120°C	DIN 43650
LFS-04	3/4"BSP	-30 to +75°C	DIN 43650
LFS-04H	3/4"BSP	-30 to +120°C	DIN 43650

	Pipe Dia	1"		1.25"		1.50"		2"		2.5"		3"	
	Switch	Op	Rel	Ор	Rel	Ор	Rel	Ор	Rel	Ор	Rel	Ор	Rel
F	Paddle length												
	1"	19	15.2	32.2	24.7	45.5	34.1	64.4	56.8				
	1.25"			24.7	17.1	34.1	26.5	56.8	45.5	87.1	75.8		
•	1.50"					53	37.9	87.1	60.6	121.2	94.7		
	2"							68.2	45.5	90.9	64.4	125	102.3
	2.5"									75.8	49.3	102.3	121.2
	3"											83.3	60.6
										75.8	49.3		

NB: Flow rates in litres per minute

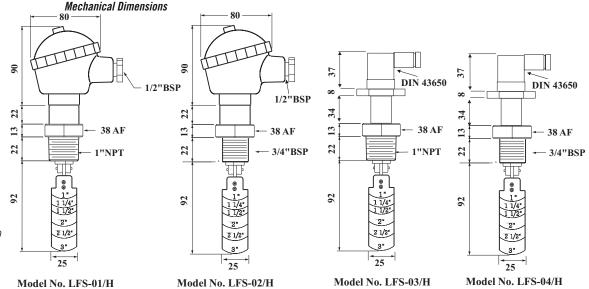

Cynergy3 Components Ltd. 7 Cobham Road Ferndown Industrial Estate Wimborne, Dorset BH21 7PE Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com